THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,19 .
© COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST
AA	22

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	REV; EC 067A-0191-98	29JAN99	DLD	CMS

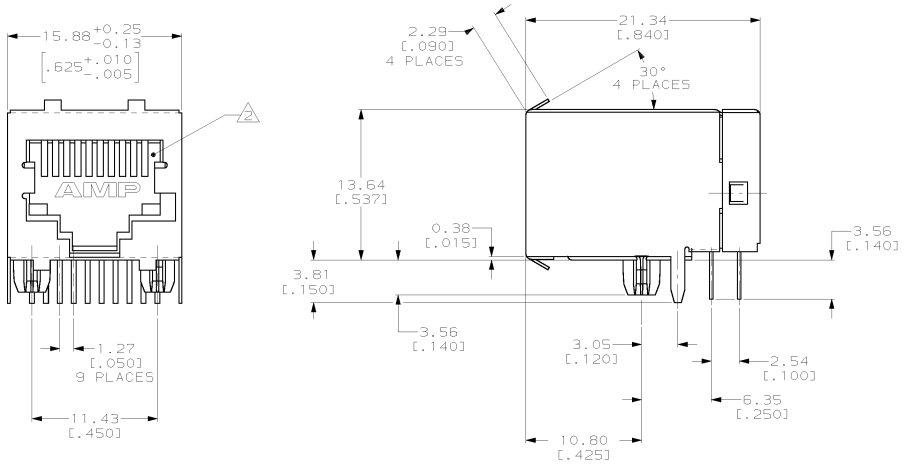

1. MATERIALS:
HOUSING - PCT POLYESTER, BLACK, IR REFLOW COMPATIBLE, UL 94V-0.
TERMINALS 0.33 [.013] THICK PHOS BRONZE PLATED WITH 1.27µm [.000050] HARD GOLD IN LOCALIZED AREA AND 3.81µm [.000150] THICK TIN-LEAD IN SOLDER AREA OVER 1.27µm [.000050] MINIMUM THICK NICKEL UNDERPLATE.
SHIELD - 0.25 [.010] THICK COPPER ALLOY PLATED WITH 2.03µm [.000080] MINIMUM TIN-LEAD OVER 2.54µm [.000100] MINIMUM COPPER.

2. JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS, PART 68 SUBPART F.

3. DIMENSIONS ARE NOMINAL UNLESS OTHERWISE SPECIFIED.

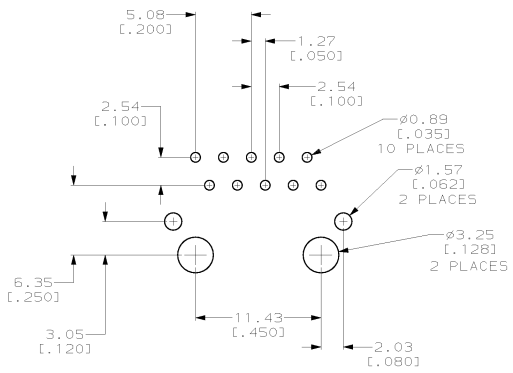

SUGGESTED PC BOARD LAYOUT
VIEW SHOWN IS TOP (COMPONENT SIDE) OF PC BOARD

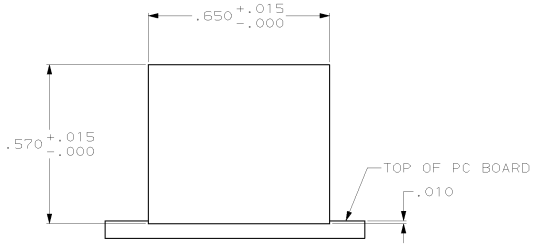

SUGGESTED PANEL CUTOUT

558070

DWN	S. MAYBERRY	21-JUL-93	
CHK	B. FOX	03-AUG-93	
APVD	G. REED	03-AUG-93	
PRODUCT SPEC	108-1163		
APPLICATION SPEC	114-2048		
WEIGHT	–		

AMP Incorporated
Harrisburg, PA 17105-3608

NAME: MODULAR JACK ASSEMBLY, 10 POSITION SIDE ENTRY, LOW PROFILE, FULLY SHIELDED, PANEL GROUND

SIZE	CAGE CODE	DRAWING NO
A2	00779	C-558070

SCALE	SHEET	REV
4:1	1 OF 1	B

CUSTOMER DRAWING

558070-1
PART NUMBER

DIMENSIONS: mm [INCHES]
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- ; 1 PLC ±- ; 2 PLC ±0.25[.01] ; 3 PLC ±0.13[.005] ; 4 PLC ±- ; ANGLES ±-
MATERIAL 1
FINISH 1

AMP 1471-9 REV 03MAY94

02-FEB-99 12:23:33 amp36051 /home/amp36051/edmmod

Downloaded from Elcodis.com electronic components distributor