

**PART NUMBER CODING**  
**SIP110-PP\_C-D\_-ST-BK**




**COLOR**  
 BK= BLACK

**NUMBER OF POSITIONS**  
 (CONTACTS PER ROW)

**PLATING**  
 (SEE PLATING TABLE)

PLATING TABLE	
CONTACT SURFACE	TERMINATION
P = GOLD FLASH	GOLD FLASH
V = GOLD FLASH	NICKEL
K = .000015" GOLD	NICKEL
J = .000015" GOLD	GOLD FLASH
E = .000100" PURE TIN, MATTE	.000100" PURE TIN, MATTE

REVISIONS				
REV.	ECO. NO	DESCRIPTION	DATE	BY
A	1930	INITIAL RELEASE	3/17/2009	JH

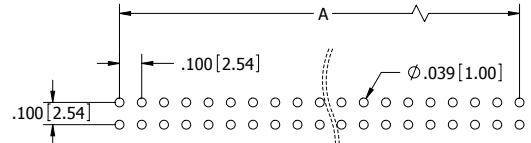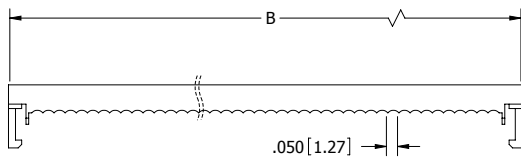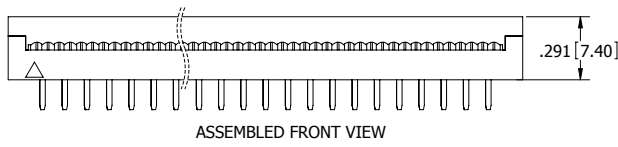

**RECOMMENDED PCB HOLE LAYOUT**

PART NUMBER	POSITIONS/ CONTACTS	A		B	
		INCH	MM	INCH	MM
SIP110-PP_C-D03-ST-BK	03/06	0.200	5.08	0.509	12.94
SIP110-PP_C-D04-ST-BK	04/08	0.300	7.62	0.609	15.48
SIP110-PP_C-D05-ST-BK	05/10	0.400	10.16	0.713	18.10
SIP110-PP_C-D06-ST-BK	06/12	0.500	12.70	0.807	20.51
SIP110-PP_C-D07-ST-BK	07/14	0.600	15.24	0.907	23.05
SIP110-PP_C-D08-ST-BK	08/16	0.700	17.78	1.009	25.64
SIP110-PP_C-D09-ST-BK	09/18	0.800	20.32	1.108	28.15
SIP110-PP_C-D10-ST-BK	10/20	0.900	22.86	1.212	30.78
SIP110-PP_C-D12-ST-BK	12/24	1.100	27.94	1.412	35.86
SIP110-PP_C-D13-ST-BK	13/26	1.200	30.48	1.512	38.40
SIP110-PP_C-D14-ST-BK	14/28	1.300	33.02	1.598	40.60
SIP110-PP_C-D15-ST-BK	15/30	1.400	35.56	1.713	43.50
SIP110-PP_C-D17-ST-BK	17/34	1.600	40.64	1.913	48.58
SIP110-PP_C-D20-ST-BK	20/40	1.900	48.26	2.213	56.20
SIP110-PP_C-D25-ST-BK	25/50	2.400	60.96	2.717	69.00
SIP110-PP_C-D30-ST-BK	30/60	2.900	73.66	3.219	81.75
SIP110-PP_C-D32-ST-BK	32/64	3.100	78.74	3.419	86.83

- NOTES:
1. INSULATOR MATERIAL: PBT 30% GLASS FIBER.
  2. CONTACT MATERIAL: PHOSPHOR BRONZE.
  3. OPERATING TEMPERATURE: -40°C TO +105°C.
  4. UL FLAMMABILITY RATING: 94V-0.
  5. CURRENT RATING: 1 AMP.
  6. INSULATION RESISTANCE: 5,000M OHMS MIN.
  7. DIELECTRIC WITHSTANDING: 1,000 VAC.
  8. FOR 1.27mm PITCH FLAT RIBBON CABLE.



RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED:  
 DIMENSIONS ARE IN INCHES(MM)  
 TOLERANCES:  
 ANGULAR: ±.30°  
 XX = ±.01 [ .3]  
 XXX = ±.008 [ .20]  
 XXXX = ±.0040 [ .100]  
 SURFACE FINISH: 63 Ra  
 REMOVE ALL BURRS AND SHARP EDGES .010 MAX.  
 INTERPRET DIMENSIONS AND GEOMETRIC  
 TOLERANCING  
 PER: ANSI Y14.5M-1994

DATE	NAME	
4/07/2009	JH	
THE INFORMATION HEREIN CONTAINS PROPRIETARY INFORMATION OF SULLINS ELECTRONICS AND IS NOT TO BE REPRODUCED, USED OR DISCLOSED TO OTHERS FOR ANY PURPOSE EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY AN OFFICER OF SULLINS ELECTRONICS.		
DESCRIPTION: IDC DIP PLUG, .100" CC/RS PART NUMBER: <b>SIP110-PP_C-D_-ST-BK</b>		
SIZE	DWG. NO.	REV
C	11229	A
SCALE: NTS		SHEET 1 OF 1