THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -.-.-
© COPYRIGHT - By - ALL RIGHTS RESERVED

UOC	DIST
AD	39

REVISIONS

P	LTR	DESCRIPTION	DATE	DBR	APVD
	R1	REVISED PER ECO-11-004587	11MAR11	RK	HMR

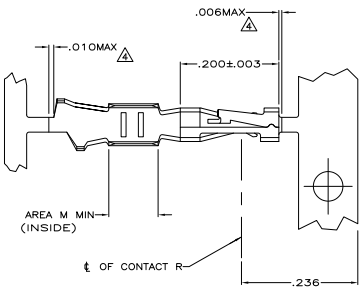



SECTION A–A
SCALE 20:1

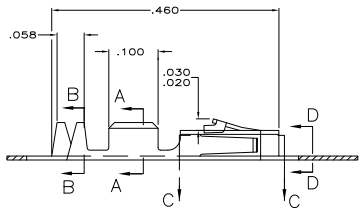



SECTION B–B
INSULATION RANGE .025–.060
SCALE 20:1

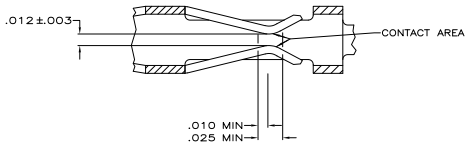

SECTION C–C
SCALE 20:1



SECTION D–D
SCALE 20:1

1. .000100 MIN BRIGHT TIN–LEAD OVER .000050 MIN NICKEL ON ENTIRE CONTACT
2. .000050 MIN NICKEL ON ENTIRE CONTACT; .000015 MIN GOLD ON CONTACT AREA; .000050 MIN BRIGHT TIN–LEAD ON AREA M.
3. .000050 MIN NICKEL ON ENTIRE CONTACT; .000030 MIN GOLD ON CONTACT AREA; .000050 MIN BRIGHT TIN–LEAD ON AREA M.
4. LOOSE PIECE CUT–OFF DIMENSION.
5. .000100–.000200 TIN OVER .000050–.000100 NICKEL ON ENTIRE CONTACT.
6. PREPLATED MATERIAL: (.000015 MIN GOLD ON CONTACT AREA, .000050–.000100 TIN ON AREA M, ALL OVER .000050–.000100 NICKEL ON ENTIRE CONTACT).
7. PREPLATED MATERIAL: (.000030 MIN GOLD ON CONTACT AREA, .000050–.000100 TIN ON AREA M, ALL OVER .000050–.000100 NICKEL ON ENTIRE CONTACT).

LOOSE PIECE	7	REF	1–104479–3
LOOSE PIECE	6	REF	1–104479–2
LOOSE PIECE	5	REF	1–104479–1
STRIP	7		1–104479–0
STRIP	6		104479–9
STRIP	4		104479–8
LOOSE PIECE	3	REF	104479–7
LOOSE PIECE	2	REF	104479–6
LOOSE PIECE	1	REF	104479–5
STRIP	3		104479–4
STRIP	2		104479–3
STRIP	1		104479–2
REMARKS	FINISH		PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES
TOLERANCES UNLESS OTHERWISE SPECIFIED:
2 PLC ± –
3 PLC ± –
4 PLC ± .005
ANGLES ± –
MATERIAL PHOSPHOR BRONZE
FINISH SEE TABLE

DRN	C.OBERMAN 5-9-89
CK	K. HELM 5-12-89
APD	R.FLICKER 5-12-89
PRODUCT SPEC	108–1472
APPLICATION SPEC	114–25038
WEIGHT	–

TE Connectivity

NAME: CONTACT, CRIMP SNAP–IN AMPMODU SHORT POINT, 20–24 AWG

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C–104479	–

CUSTOMER DRAWING | SCALE 10:1 | SHEET 1 OF 1 | REV R1

4805 (3/11)

Downloaded from Elcodis.com electronic components distributor