

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	BY	APPD
		K	EC	063C 0759 04	24JAN05	BSV	JLG
		K1		REVISED PER ECO-09-020689	02SEP09	KK	AEG

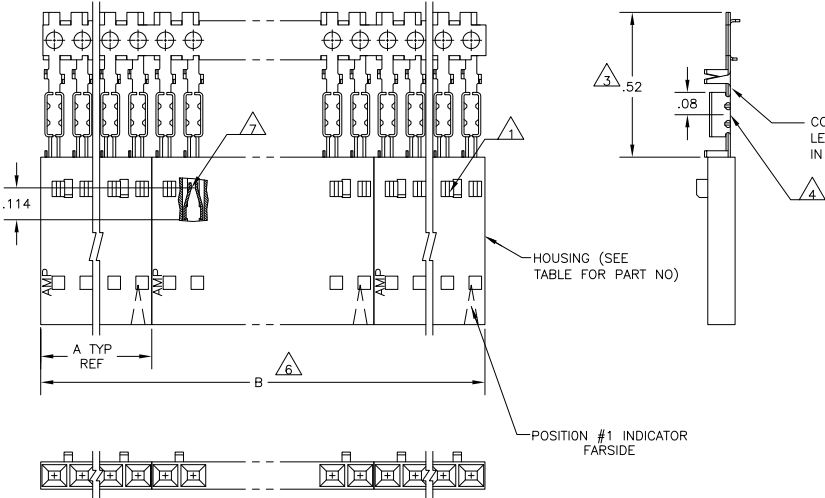

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103652
- 6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- 7 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- 8 MAXIMUM ALLOWABLE BOW OF ASSEMBLY NOT TO EXCEED .055.
- 9 .000100-.000200 BRIGHT TIN-LEAD OVER .000050 NICKEL.
- 10 .000100-.000200 BRIGHT TIN OVER .000050 NICKEL.
- 11 PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- 12 HOUSING MATERIAL: FLAME RETARDANT THERMOPLASTIC, COLOR BLACK.
- 13 .000100-.000200 MATTE TIN OVER .000050 NICKEL.
- 14 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

PLATING	△	B	A	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER ON STRIP	
△	△	2	2.40	1.198	1-103648-1	12	6-103968-1
△	△	2	2.20	1.098	1-103648-0	11	6-103968-0
△	△	2	2.00	.998	103648-9	10	5-103968-9
△	△	2	1.80	.898	103648-8	9	5-103968-8
△	△	2	1.60	.798	103648-7	8	5-103968-7
△	△	2	1.40	.698	103648-6	7	5-103968-6
△	△	4	2.39	.598	103648-5	6	5-103968-5
△	△	4	1.99	.498	103648-4	5	5-103968-4
△	△	5	1.99	.398	103648-3	4	5-103968-3
△	△	8	2.40	.298	103648-2	3	5-103968-2
△	△	10	2.00	.198	103648-1	2	5-103968-1
△	△	2	2.00	.998	103648-9	10	1-103968-2
△	△	2	2.40	1.198	1-103648-1	12	1-103968-1
△	△	2	2.20	1.098	1-103648-0	11	1-103968-0
△	△	2	2.00	.998	103648-9	10	103968-9
△	△	2	1.80	.898	103648-8	9	103968-8
△	△	2	1.60	.798	103648-7	8	103968-7
△	△	2	1.40	.698	103648-6	7	103968-6
△	△	4	2.39	.598	103648-5	6	103968-5
△	△	4	1.99	.498	103648-4	5	103968-4
△	△	5	1.99	.398	103648-3	4	103968-3
△	△	8	2.40	.298	103648-2	3	103968-2
△	△	10	2.00	.198	103648-1	2	103968-1

EXAMPLE: STRIP ASSEMBLY
SCALE 2:1

THIS DRAWING IS A CONTROLLED DOCUMENT. DATE: 05 NOV 1986

DESIGNED BY: L. MAYER
 CHECKED BY: P. C. DEJONG
 APPROVED BY: J. SCHEFFER

TYCO ELECTRONICS CORPORATION
 Harrisburg, Pa 17105-3608

PRODUCT SPEC: 108-25034
 APPLICATION SPEC: 114-25026

RCPT ASSY, AMPMODU MTE, SINGLE ROW, .100 C/L, WITH GUIDE RIBS, FOR #22-#26 AWG WIRE SIZE, STRIP FORM

SIZE: A2 00779 C=103968

CUSTOMER DRAWING SCALE: 4:1 SHEET: 1 OF 1 REV: K1

AMP 1471-9 REV 31MM2000