


REV.	DESCRIPTION/ECO NO.	DATE
	RELEASE AND CANCEL	2/7/03
	BXA503/KIT & BXA-503/INV	

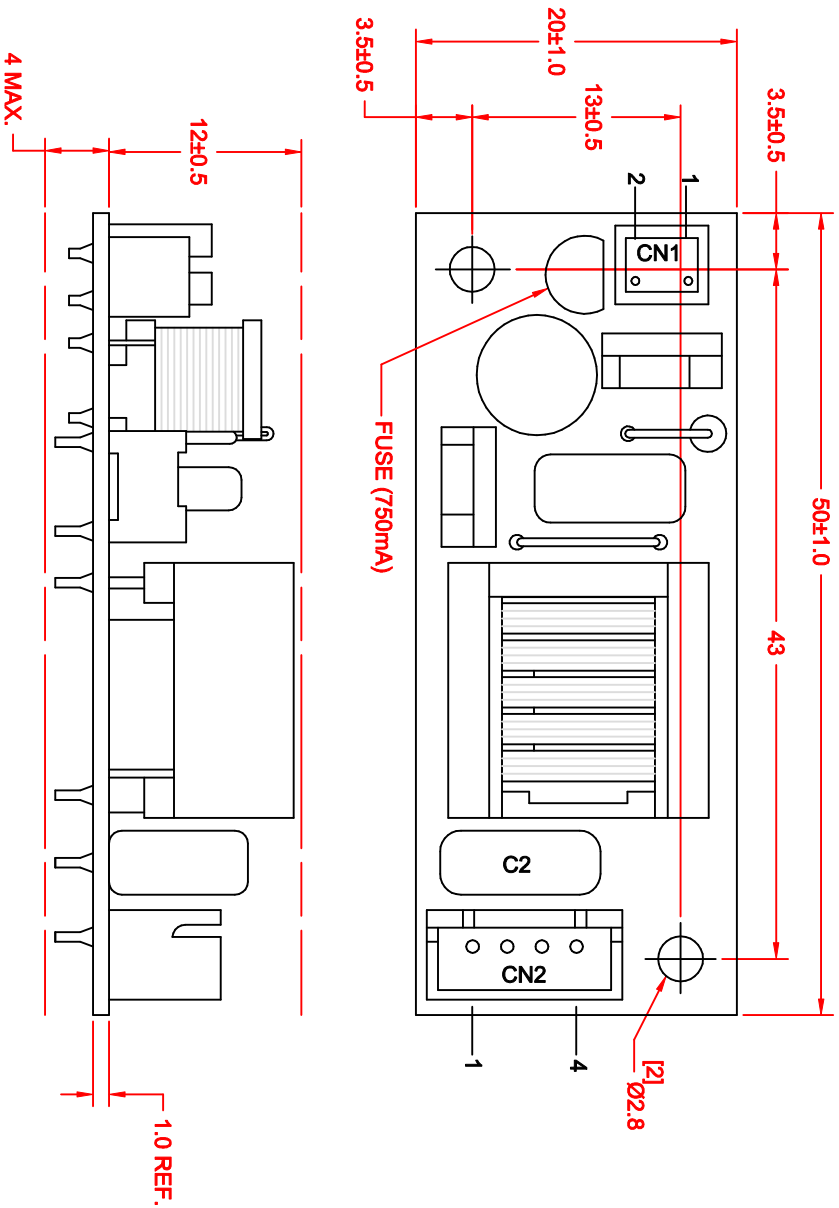

NO.	PIN NUMBER	JKL MATING WIRE HARNESS
CN1	1 INPUT (GND)	BXC-10574
	2 INPUT (+V)	
CN2	1 OUTPUT (HV1)	BXC-10585
	2 NO CONNECTION	
	3	
	4 OUT LAMP (GND)	

**OPERATING SPECIFICATIONS**

CHARACTERISTICS	MIN	TYP	MAX
INPUT VOLTAGE: (Vdc)	5.0	6.0	7.0
INPUT CURRENT: (mA)	150	350	700
OUTPUT VOLTAGE: (Vrms)	700	1200	1450
OUTPUT CURRENT 2 X (mA)	3.0	5.0	6.5
OUTPUT FREQUENCY: (kHz)	30	35	40
OPERATING TEMP: (CELSIUS)	-	25	-

**NOTE:**  
 MATING CONNECTORS ARE NOT INCLUDED WITH INVERTER.  
 JKL WIRE HARNESS BXC-10574 AND BXC-10585 CAN BE ORDERED SEPARATELY.

METRIC	DIMENSIONS ARE IN MILLIMETERS	TOLERANCE UNLESS OTHERWISE SPECIFIED
	THIRD ANGLE PROJECTION	1 PL +/- 0.3 2 PL +/- 0
DRAWN BY L. WENGSTROM	APP'D BY F.D.	DATE 2/7/03
- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED		
SCALE NONE	SIZE A	FSCH NO. 55335
		DRAWING NO. BXA-503
	RELEASED DATE 2/7/03	REVISION DATE
		REV. NO.
		SHEET OF

**JKL COMPONENTS CORPORATION**

CCFL INVERTER