

## Technical Data Sheet

### 3mm Phototransistor T-1

---

#### PT204-6B

#### Features

- Fast response time
- High photo sensitivity
- Pb free
- The product itself will remain within RoHS compliant version.

#### Descriptions

- PT204-6B is a high speed and high sensitive NPN silicon phototransistor molded in a standard  $\phi 3$  mm package. Due to its black epoxy the device is sensitive




#### Applications

- Infrared applied system
- Camera
- Printer
- Cockroach catcher

#### Device Selection Guide

| LED Part No. | Chip     | Lens Color |
|--------------|----------|------------|
|              | Material |            |
| PT           | Silicon  | Black      |

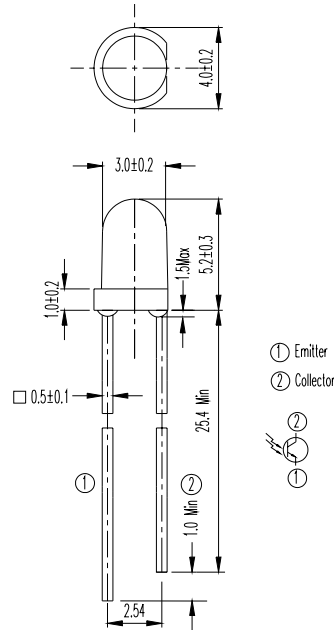**Package Dimensions**


- Notes:** 1.All dimensions are in millimeters  
 2.Tolerances unless dimensions  $\pm 0.25\text{mm}$

**Absolute Maximum Ratings (Ta=25°C)**

| Parameter   | Symbol    | Rating      | Units |
|---|-----------|-------------|-------|
| Collector-Emitter Voltage                                 | $V_{CEO}$ | 30          | V     |
| Emitter-Collector-Voltage                                 | $V_{ECO}$ | 5           | V     |
| Collector Current   | $I_C$     | 20          | mA    |
| Operating Temperature                                     | $T_{opr}$ | -25 ~ +85°C | °C    |
| Storage Temperature                                       | $T_{stg}$ | -40 ~ +85°C | °C    |
| Lead Soldering Temperature                                | $T_{sol}$ | 260         | °C    |
| Power Dissipation at (or below) 25°C Free Air Temperature | $P_c$     | 75          | mW    |

**Notes:** \*1:Soldering time  $\leq 5$  seconds.

**Electro-Optical Characteristics (Ta=25°C)**

| Parameter                             | Symbol          | Condition                                    | Min. | Typ. | Max. | Units   |
|---------------------------------------|-----------------|--|------|------|------|---------|
| Rang Of Spectral Bandwidth            | $\lambda_{0.5}$ | ---  | 840  | ---  | 1100 | nm      |
| Wavelength of Peak Sensitivity        | $\lambda_P$     | ---  | ---  | 940  | ---  | nm      |
| Collector – Emitter Breakdown Voltage | $BV_{CEO}$      | $I_C=100 \mu A$<br>$E_e=0mW/cm^2$            | 30   | ---  | ---  | V       |
| Emitter-Collector Breakdown Voltage   | $BV_{ECO}$      | $I_E=100 \mu A$<br>$E_e=0mW/cm^2$            | 5    | ---  | ---  | V       |
| Collector-Emitter Saturation Voltage  | $V_{CE(sat)}$   | $I_C=2mA$<br>$E_e=1mW/cm^2$                  | ---  | ---  | 0.4  | V       |
| Rise Time                             | $t_r$           | $V_{CE}=5V$<br>$I_C=1mA$<br>$RL=1000 \Omega$ | ---  | 15   | ---  | $\mu S$ |
| Fall Time                             | $t_f$           |  | ---  | 15   | ---  |         |
| Collector Dark Current                | $I_{CEO}$       | $E_e=0mW/cm^2$<br>$V_{CE}=20V$               | ---  | ---  | 100  | nA      |
| On State Collector Current            | $I_{C(on)}$     | $E_e=1mW/cm^2$<br>$V_{CE}=5V$                | 0.7  | 2.0  | ---  | mA      |

**Rankings**

| Parameter | Symbol      | Min  | Max  | Unit | Test Condition                 |
|-----------|-------------|------|------|------|--------------------------------|
| G         | $I_{C(ON)}$ | 0.70 | 1.90 | mA   | $V_{CE}=5V$<br>$E_e=1mW/c m^2$ |
| H         |             | 1.14 | 2.60 |      |                                |
| J         |             | 1.77 | 3.61 |      |                                |
| K         |             | 2.67 | 5.07 |      |                                |

**Typical Electro-Optical Characteristics Curves**

Fig.1 Collector Power Dissipation vs. Ambient Temperature

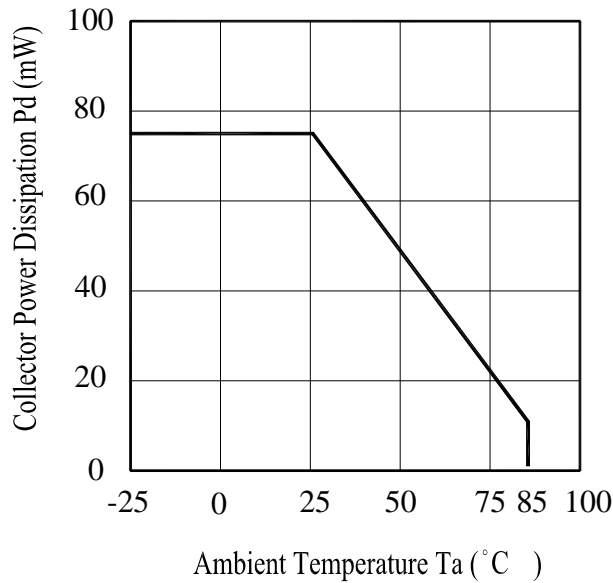


Fig.2 Spectral Sensitivity

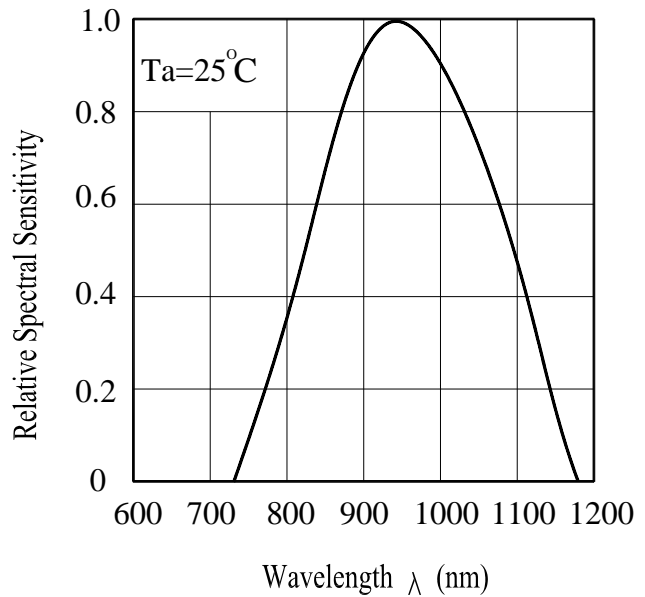


Fig.3 Relative Collector Current vs. Ambient Temperature


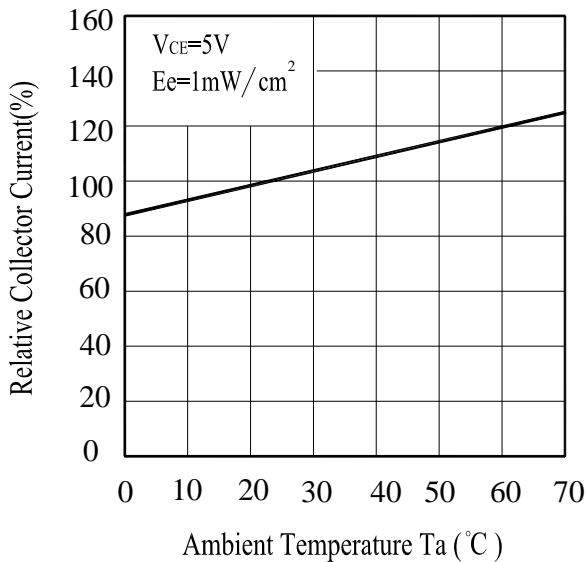


Fig.4 Collector Current vs. Irradiance

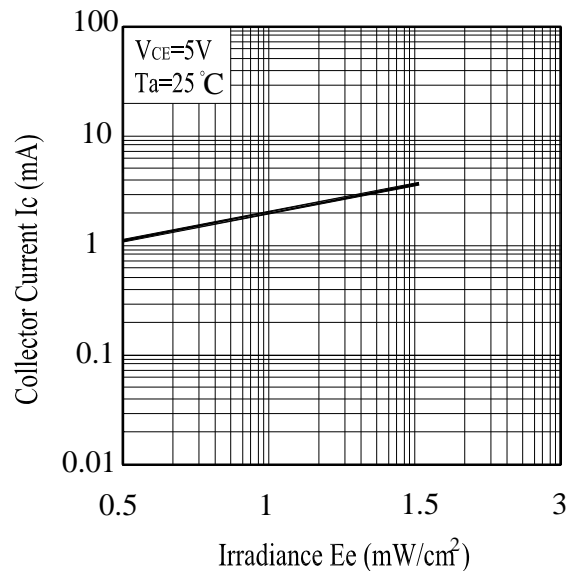

**Typical Electro-Optical Characteristics Curves**

Fig.5 Collector Dark Current vs. Ambient Temperature


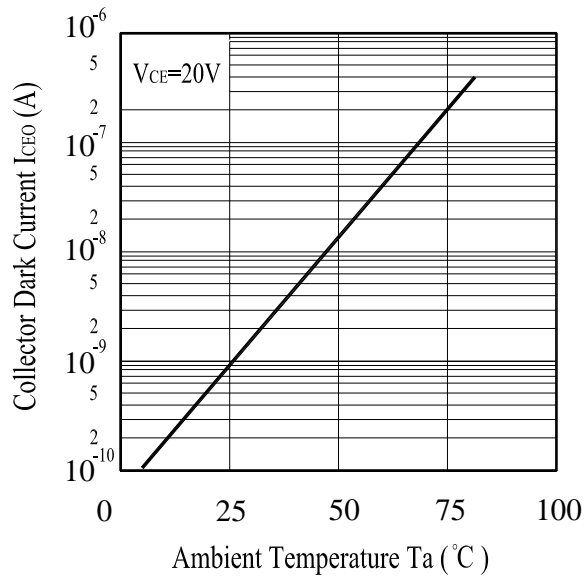


Fig.6 Collector Current vs. Collector-Emitter Voltage

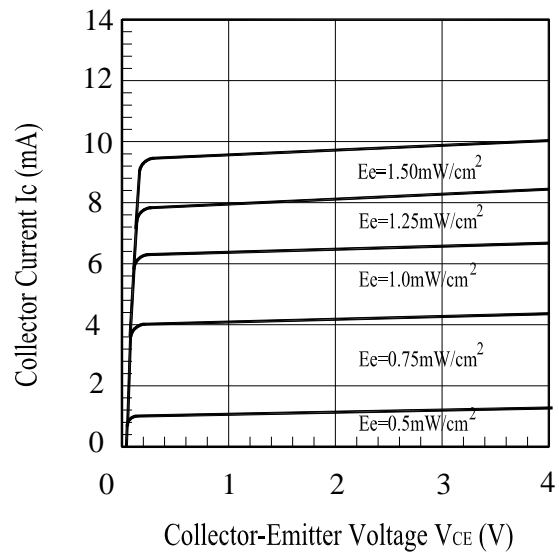

**Reliability Test Item And Condition**

The reliability of products shall be satisfied with items listed below.

Confidence level : 90%

LTPD : 10%

| NO. | Item                               | Test Conditions  | Test Hours/<br>Cycles | Sample<br>Sizes | Failure<br>Judgement<br>Criteria   | Ac/Re |
|-----|------------------------------------|--|-----------------------|-----------------|--|-------|
| 1   | Solder Heat                        | TEMP. : 260°C±5°C  | 10secs                | 22pcs           | $I_{C(ON)} \leq L \times 0.8$<br><br>L : Lower<br>Specification<br>Limit | 0/1   |
| 2   | Temperature Cycle                  | H : +100°C    15mins<br>$\updownarrow$<br>5mins<br>L : -40°C    15mins | 300Cycles             | 22pcs           |  | 0/1   |
| 3   | Thermal Shock                      | H : +100°C    5mins<br>$\updownarrow$<br>10secs<br>L : -10°C    5mins  | 300Cycles             | 22pcs           |  | 0/1   |
| 4   | High Temperature Storage           | TEMP. : +100°C   | 1000hrs               | 22pcs           |  | 0/1   |
| 5   | Low Temperature Storage            | TEMP. : -40°C  | 1000hrs               | 22pcs           |  | 0/1   |
| 6   | DC Operating Life                  | $V_{CE}=5V$  | 1000hrs               | 22pcs           |  | 0/1   |
| 7   | High Temperature/<br>High Humidity | 85°C / 85% R.H   | 1000hrs               | 22pcs           |  | 0/1   |




### Packing Quantity Specification

1.1000PCS/1Bag , 4Bags/1Box

2.10Boxes/1Carton

### Label Form Specification

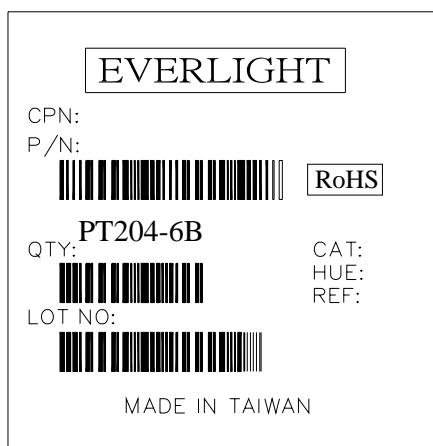

PN: Customer's Production Number

P/N : Production Number

QTY: Packing Quantity

CAT: Ranks

HUE: Peak Wavelength

REF: Reference

LOT No: Lot Number

MADE IN TAIWAN: Production Place

### Notes

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
3. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.

**EVERLIGHT ELECTRONICS CO., LTD.**  
Office: No 25, Lane 76, Sec 3, Chung Yang Rd,  
Tucheng, Taipei 236, Taiwan, R.O.C

Tel: 886-2-2267-2000, 2267-9936  
Fax: 886-2267-6244, 2267-6189, 2267-6306  
<http://www.everlight.com>