

FEATURES/BENEFITS

- Latest generation MOSFET technology
- Ultra low on-state resistance
- Innovative isolated driver ensures fast power transistor turn on and off and thus low power transient
- Ultra low output leakage current
- Low control current consumption
- Triggered control input to avoid linear control risks
- Low conducted and radiated disturbances



Part Number	Description
S20DC100	100A, 200 Vdc Solid-State Relay

Part Number Explanation

S **20** **DC** **100**
 Series Line Voltage¹ Switch Type² Output Current – Amps

NOTES

- 1) Line Voltage (peak): 20 = 200 Vdc
 2) Switch Type: DC = DC

ELECTRICAL SPECIFICATIONS
 (+25°C ambient temperature unless otherwise specified)

INPUT (CONTROL) SPECIFICATIONS

	Min	Max	Units
Control Range	4.5	32	Vdc
Input Current Range	25	42	mAdc
Typical Turn-On Voltage	4.3		Vdc
Must Turn-Off Voltage	1		Vdc
Reverse Voltage		32	Vdc
Reverse Leakage Current		100	µA

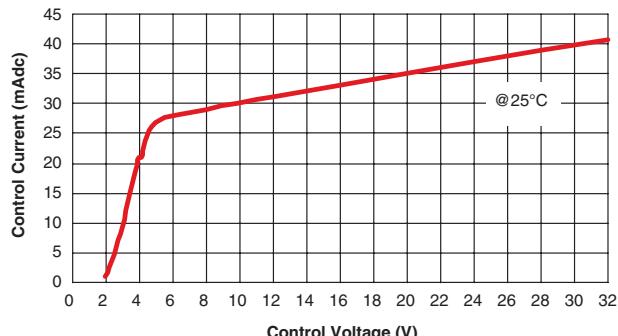
CONTROL CHARACTERISTIC


Figure 2

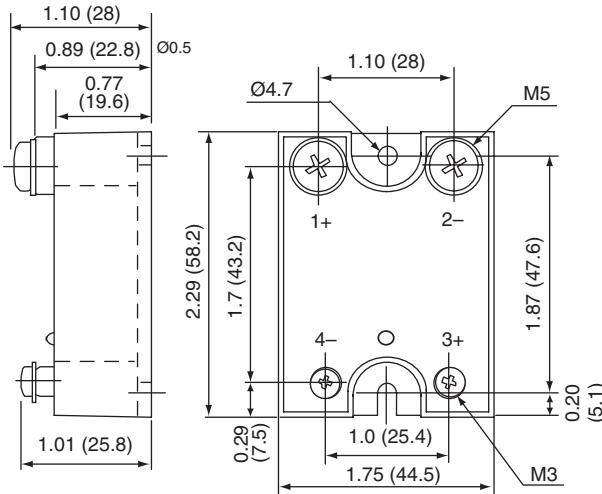
MECHANICAL SPECIFICATION


Figure 1

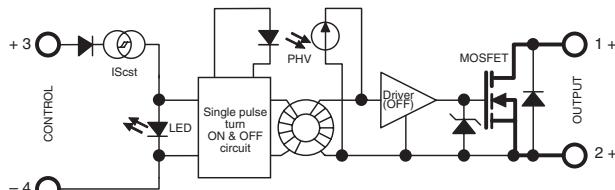
BLOCK DIAGRAM


Figure 3

NEW Series S20DC100

Output to 100A, 200 Vdc
DC Solid-State Relay

ELECTRICAL SPECIFICATIONS

(+25°C ambient temperature unless otherwise specified)

OUTPUT (LOAD) SPECIFICATIONS

	Min	Max	Units
Operating Range	0	130	Vdc
Peak Voltage	200		Vpeak
Reverse Voltage (Internal Diode)	1.6		V
Maximum Repetitive Avalanche Current	100	A	
Maximum Single Pulse Avalanche Energy	750		mJ
Maximum Repetitive Pulse Avalanche Energy	58		mJ
Maximum Nominal Currents (Resistive)	100	A	
Non-Repetitive Peak Overload Current	400	A	
Leakage Current	250		µAdc
On-State Resistance	22		mΩ
Output Capacitance (Typical)	1.5		nF
Junction-Case Thermal Resistance	0.4		°C/W
Built-In Heat Sink Thermal Resistance (Vertically Mounted)	8		°C/W
Heat Sink Thermal Time Constant	10		min
Control Inputs/Power Outputs			
Insulation Voltage	4		kV
Turn-On Time	10		µs
Turn-On Delay	600		µs
Turn-Off Time	10		µs
Turn-Off Delay	100		µs
On-Off Frequency	700		Hz

TIME DIAGRAMS

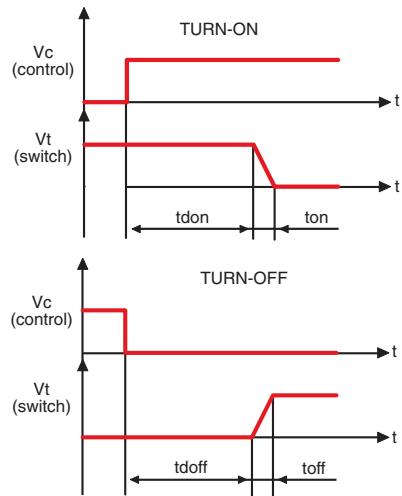


Figure 6

HIGH SIDE WIRING DIAGRAM (Load Connected to "—")

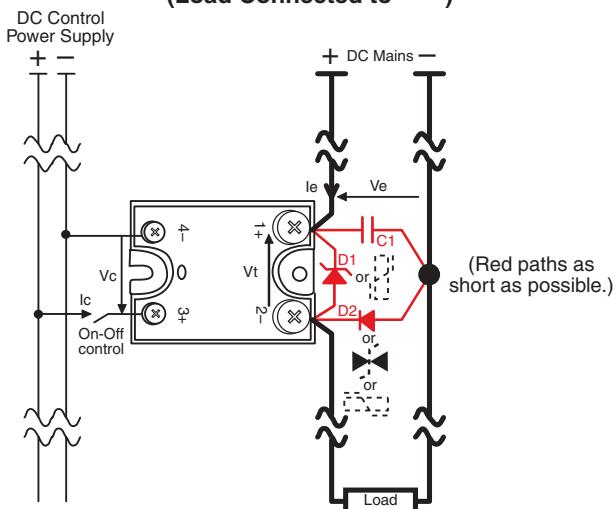


Figure 4

LOW SIDE WIRING DIAGRAM (Load Connected to "+")

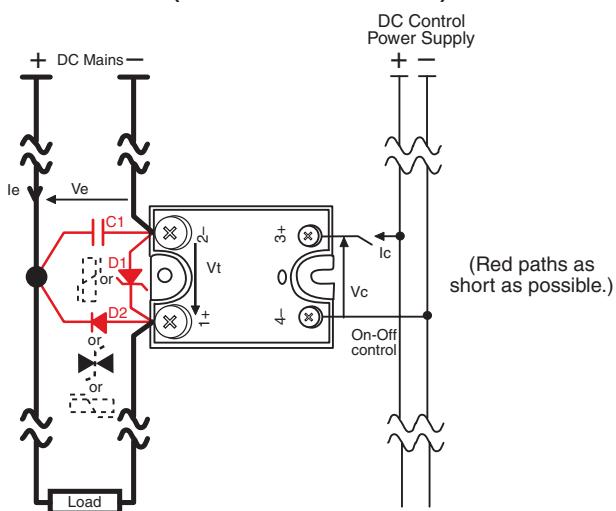


Figure 5

ON RESISTANCE VS. TEMPERATURE

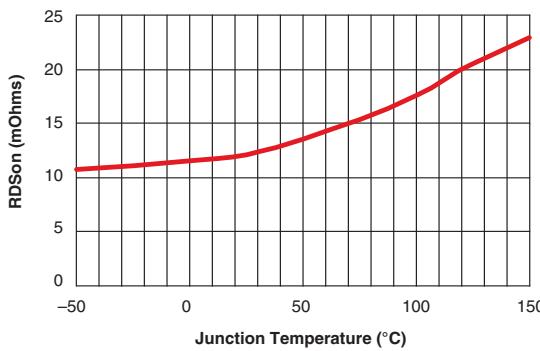
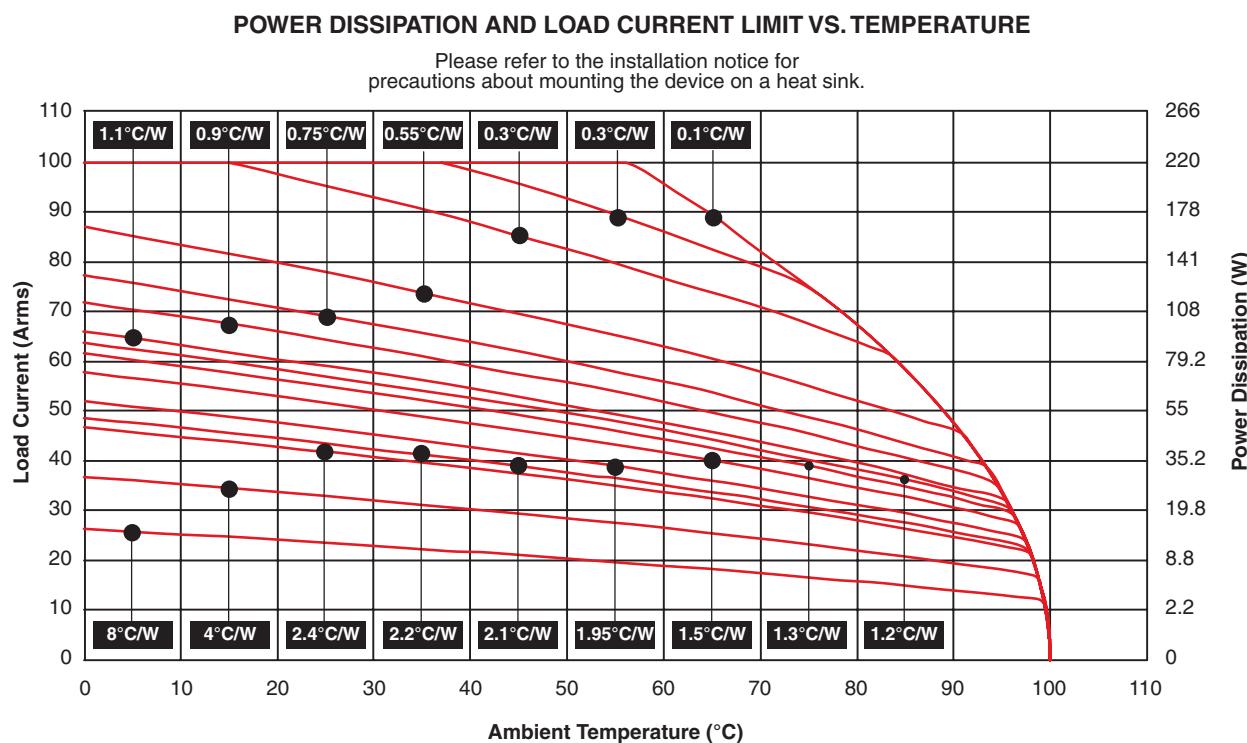


Figure 7

*Figure 8***GENERAL SPECIFICATIONS**

(+25°C ambient temperature unless otherwise specified)

ENVIRONMENTAL SPECIFICATIONS

	Min	Max	Units
Operating Temperature	-40	+90	°C
Storage Temperature	-40	+100	°C
Input-Output Isolation	4000		Vrms
Insulation Resistance	1		GΩ
Insulation Capacitance	<8		pF
Junction Temperature		175	°C

CONNECTIONS

	Power	Control
Screwdriver	Phillips NR2	Phillips NR1
Tightening Torque	1.8 N.m	0.8 N.m
Insulated crimp terminals (Round Tabs, Eyelet Type)	M5	M3

MISCELLANEOUS


Display	Green LED (ON)
Housing	UL94V0
Mounting	2 screws (M4x12mm)
Noise Level	No audible noise

GENERAL

Standards	IEC60947-1
Protection Level	IP00
Protection Against Direct Touch	None
CE Marking	Yes

E.M.C. EMISSION

Radiated & Conducted Disturbances NFEN55011

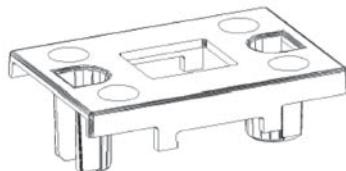PROTECTIVE COVER AVAILABLE
Add -14 to part number*Figure 9*
NOTES
 1. For additional/custom options, contact factory.