

Surface Mount TRANSZORB® Transient Voltage Suppressors



DO-214AC (SMA)

| PRIMARY CHARACTERISTICS | |
|-------------------------|----------------|
| V_{WM} | 5.0 V to 188 V |
| P_{PPM} | 400 W, 300 W |
| I_{FSM} | 40 A |
| $T_J \text{ max.}$ | 150 °C |

DEVICES FOR BI-DIRECTION APPLICATIONS

For bi-directional use C or CA suffix (e.g. SMAJ10C, SMAJ10CA).

Electrical characteristics apply in both directions.

FEATURES

- Low profile package
- Ideal for automated placement
- Glass passivated chip junction
- Available in uni-directional and bi-directional
- 400 W peak pulse power capability with a 10/1000 μs waveform, repetitive rate (duty cycle): 0.01 % (300 W above 78 V)
- Excellent clamping capability
- Very fast response time
- Low incremental surge resistance
- Meets MSL level 1, per J-STD-020C, LF max peak of 260 °C
- Solder dip 260 °C, 40 seconds
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC



TYPICAL APPLICATIONS

Use in sensitive electronics protection against voltage transients induced by inductive load switching and lighting on ICs, MOSFET, signal lines of sensor units for consumer, computer, industrial, automotive and telecommunication.

MECHANICAL DATA

Case: DO-214AC (SMA)

Epoxy meets UL 94V-0 flammability rating

Terminals: Matte tin plated leads, solderable per J-STD-002B and JESD22-B102D

E3 suffix for commercial grade, HE3 suffix for high reliability grade (AEC Q101 qualified)

Polarity: Color band denotes cathode end

| MAXIMUM RATINGS ($T_A = 25$ °C unless otherwise noted) | | | |
|---|----------------|----------------|------|
| PARAMETER | SYMBOL | VALUE | UNIT |
| Peak pulse power dissipation with a 10/1000 μs waveform ⁽¹⁾⁽²⁾ (Fig. 1) | P_{PPM} | 400 | W |
| Peak pulse current with a waveform ⁽¹⁾ | I_{PPM} | See next table | A |
| Peak forward surge current 8.3 ms single half sine-wave uni-directional only ⁽²⁾ | I_{FSM} | 40 | A |
| Operating junction and storage temperature range | T_J, T_{STG} | - 55 to + 150 | °C |

Notes:

(1) Non-repetitive current pulse, per Fig. 3 and derated above $T_A = 25$ °C per Fig. 2. Rating is 300 W above 78 V

(2) Mounted on 0.2 x 0.2" (5.0 x 5.0 mm) copper pads to each terminal



| ELECTRICAL CHARACTERISTICS ($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted) | | | | | | | | | |
|--|---------------------|----|--|------|-------------------------|--------------------------------|--|---|---|
| DEVICE TYPE | DEVICE MARKING CODE | | BREAKDOWN VOLTAGE V_{BR} AT I_T ⁽¹⁾ (V) | | TEST CURRENT I_T (mA) | STAND-OFF VOLTAGE V_{WM} (V) | MAXIMUM REVERSE LEAKAGE AT V_{WM} I_D (μA) ⁽³⁾ | MAXIMUM PEAK PULSE SURGE CURRENT I_{PPM} (A) ⁽²⁾ | MAXIMUM CLAMPING VOLTAGE AT I_{PPM} V_C (V) |
| | UNI | BI | MIN | MAX | | | | | |
| SMAJ5.0 | AD | WD | 6.40 | 7.82 | 10 | 5.0 | 800 | 41.7 | 9.6 |
| SMAJ5.0A ⁽⁵⁾ | AE | WE | 6.40 | 7.07 | 10 | 5.0 | 800 | 43.5 | 9.2 |
| SMAJ6.0 | AF | WF | 6.67 | 8.15 | 10 | 6.0 | 800 | 35.1 | 11.4 |
| SMAJ6.0A | AG | WG | 6.67 | 7.37 | 10 | 6.0 | 800 | 38.8 | 10.3 |
| SMAJ6.5 | AH | WH | 7.22 | 8.82 | 10 | 6.5 | 500 | 32.5 | 12.3 |
| SMAJ6.5A | AK | WK | 7.22 | 7.98 | 10 | 6.5 | 500 | 35.7 | 11.2 |
| SMAJ7.0 | AL | WL | 7.78 | 9.51 | 10 | 7.0 | 200 | 30.1 | 13.3 |
| SMAJ7.0A | AM | WM | 7.78 | 8.60 | 10 | 7.0 | 200 | 33.3 | 12.0 |
| SMAJ7.5 | AN | WN | 8.33 | 10.2 | 1.0 | 7.5 | 100 | 28.0 | 14.3 |
| SMAJ7.5A | AP | WP | 8.33 | 9.21 | 1.0 | 7.5 | 100 | 31.0 | 12.9 |
| SMAJ8.0 | AQ | WQ | 8.89 | 10.9 | 1.0 | 8.0 | 50 | 26.7 | 15.0 |
| SMAJ8.0A | AR | WR | 8.89 | 9.83 | 1.0 | 8.0 | 50 | 29.4 | 13.6 |
| SMAJ8.5 | AS | WS | 9.44 | 11.5 | 1.0 | 8.5 | 10 | 25.2 | 15.9 |
| SMAJ8.5A | AT | WT | 9.44 | 10.4 | 1.0 | 8.5 | 10 | 27.8 | 14.4 |
| SMAJ9.0 | AU | WU | 10.0 | 12.2 | 1.0 | 9.0 | 5.0 | 23.7 | 16.9 |
| SMAJ9.0A | AV | WV | 10.0 | 11.1 | 1.0 | 9.0 | 5.0 | 26.0 | 15.4 |
| SMAJ10 | AW | WW | 11.1 | 13.6 | 1.0 | 10 | 1.0 | 21.3 | 18.8 |
| SMAJ10A | AX | WX | 11.1 | 12.3 | 1.0 | 10 | 1.0 | 23.5 | 17.0 |
| SMAJ11 | AY | WY | 12.2 | 14.9 | 1.0 | 11 | 1.0 | 19.9 | 20.1 |
| SMAJ11A | AZ | WZ | 12.2 | 13.5 | 1.0 | 11 | 1.0 | 22.0 | 18.2 |
| SMAJ12 | BD | XD | 13.3 | 16.3 | 1.0 | 12 | 1.0 | 18.2 | 22.0 |
| SMAJ12A | BE | XE | 13.3 | 14.7 | 1.0 | 12 | 1.0 | 20.1 | 19.9 |
| SMAJ13 | BF | XF | 14.4 | 17.6 | 1.0 | 13 | 1.0 | 16.8 | 23.8 |
| SMAJ13A | BG | XG | 14.4 | 15.9 | 1.0 | 13 | 1.0 | 18.6 | 21.5 |
| SMAJ14 | BH | XH | 15.6 | 19.1 | 1.0 | 14 | 1.0 | 15.5 | 25.8 |
| SMAJ14A | BK | XK | 15.6 | 17.2 | 1.0 | 14 | 1.0 | 17.2 | 23.2 |
| SMAJ15 | BL | XL | 16.7 | 20.4 | 1.0 | 15 | 1.0 | 14.9 | 26.9 |
| SMAJ15A | BM | XM | 16.7 | 18.5 | 1.0 | 15 | 1.0 | 16.4 | 24.4 |
| SMAJ16 | BN | XN | 17.8 | 21.8 | 1.0 | 16 | 1.0 | 13.9 | 28.8 |
| SMAJ16A | BP | XP | 17.8 | 19.7 | 1.0 | 16 | 1.0 | 15.4 | 26.0 |
| SMAJ17 | BQ | XQ | 18.9 | 23.1 | 1.0 | 17 | 1.0 | 13.1 | 30.5 |
| SMAJ17A | BR | XR | 18.9 | 20.9 | 1.0 | 17 | 1.0 | 14.5 | 27.6 |
| SMAJ18 | BS | XS | 20.0 | 24.4 | 1.0 | 18 | 1.0 | 12.4 | 32.2 |
| SMAJ18A | BT | XT | 20.0 | 22.1 | 1.0 | 18 | 1.0 | 13.7 | 29.2 |
| SMAJ20 | BU | XU | 22.2 | 27.1 | 1.0 | 20 | 1.0 | 11.2 | 35.8 |
| SMAJ20A | BV | XV | 22.2 | 24.5 | 1.0 | 20 | 1.0 | 12.3 | 32.4 |
| SMAJ22 | BW | XW | 24.4 | 29.8 | 1.0 | 22 | 1.0 | 10.2 | 39.4 |
| SMAJ22A | BX | XX | 24.4 | 26.9 | 1.0 | 22 | 1.0 | 11.3 | 35.5 |
| SMAJ24 | BY | XY | 26.7 | 32.6 | 1.0 | 24 | 1.0 | 9.3 | 43.0 |
| SMAJ24A | BZ | XZ | 26.7 | 29.5 | 1.0 | 24 | 1.0 | 10.3 | 38.9 |
| SMAJ26 | CD | YD | 28.9 | 35.3 | 1.0 | 26 | 1.0 | 8.6 | 46.6 |
| SMAJ26A | CE | YE | 28.9 | 31.9 | 1.0 | 26 | 1.0 | 9.5 | 42.1 |
| SMAJ28 | CF | YF | 31.1 | 38.0 | 1.0 | 28 | 1.0 | 8.0 | 50.0 |
| SMAJ28A | CG | YG | 31.1 | 34.4 | 1.0 | 28 | 1.0 | 8.8 | 45.4 |
| SMAJ30 | CH | YH | 33.3 | 40.7 | 1.0 | 30 | 1.0 | 7.5 | 53.5 |
| SMAJ30A | CK | YK | 33.3 | 36.8 | 1.0 | 30 | 1.0 | 8.3 | 48.4 |
| SMAJ33 | CL | YL | 36.7 | 44.9 | 1.0 | 33 | 1.0 | 6.8 | 59.0 |
| SMAJ33A | CM | YM | 36.7 | 40.6 | 1.0 | 33 | 1.0 | 7.5 | 53.3 |
| SMAJ36 | CN | YN | 40.0 | 48.9 | 1.0 | 36 | 1.0 | 6.2 | 64.3 |
| SMAJ36A | CP | YP | 40.0 | 44.2 | 1.0 | 36 | 1.0 | 6.9 | 58.1 |
| SMAJ40 | CQ | YQ | 44.4 | 54.3 | 1.0 | 40 | 1.0 | 5.6 | 71.4 |

| ELECTRICAL CHARACTERISTICS ($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted) | | | | | | | | | |
|---|---------------------|--|--|------|-------------------------|--------------------------------|--|---|---|
| DEVICE TYPE | DEVICE MARKING CODE | | BREAKDOWN VOLTAGE V_{BR} AT I_T ⁽¹⁾ (V) | | TEST CURRENT I_T (mA) | STAND-OFF VOLTAGE V_{WM} (V) | MAXIMUM REVERSE LEAKAGE AT V_{WM} I_D (μA) ⁽³⁾ | MAXIMUM PEAK PULSE SURGE CURRENT I_{PPM} (A) ⁽²⁾ | MAXIMUM CLAMPING VOLTAGE AT I_{PPM} V_C (V) |
| | UNI | BI | MIN | MAX | | | | | |
| SMAJ40A | CR | YR | 44.4 | 49.1 | 1.0 | 40 | 1.0 | 6.2 | 64.5 |
| SMAJ43 | CS | YS | 47.8 | 58.4 | 1.0 | 43 | 1.0 | 5.2 | 76.7 |
| SMAJ43A | CT | YT | 47.8 | 52.8 | 1.0 | 43 | 1.0 | 5.8 | 69.4 |
| SMAJ45 | CU | YU | 50.0 | 61.1 | 1.0 | 45 | 1.0 | 5.0 | 80.3 |
| SMAJ45A | CV | YV | 50.0 | 55.3 | 1.0 | 45 | 1.0 | 5.5 | 72.7 |
| SMAJ48 | CW | YW | 53.3 | 65.1 | 1.0 | 48 | 1.0 | 4.7 | 85.5 |
| SMAJ48A | CX | YX | 53.3 | 58.9 | 1.0 | 48 | 1.0 | 5.2 | 77.4 |
| SMAJ51 | CY | YY | 56.7 | 69.3 | 1.0 | 51 | 1.0 | 4.4 | 91.1 |
| SMAJ51A | CZ | YZ | 56.7 | 62.7 | 1.0 | 51 | 1.0 | 4.9 | 82.4 |
| SMAJ54 | RD | ZD | 60.0 | 73.3 | 1.0 | 54 | 1.0 | 4.2 | 96.3 |
| SMAJ54A | RE | ZE | 60.0 | 66.3 | 1.0 | 54 | 1.0 | 4.6 | 87.1 |
| SMAJ58 | RF | ZF | 64.4 | 78.7 | 1.0 | 58 | 1.0 | 3.9 | 103 |
| SMAJ58A | RG | ZG | 64.4 | 71.2 | 1.0 | 58 | 1.0 | 4.3 | 93.6 |
| SMAJ60 | RH | ZH | 66.7 | 81.5 | 1.0 | 60 | 1.0 | 3.7 | 107 |
| SMAJ60A | RK | ZK | 66.7 | 73.7 | 1.0 | 60 | 1.0 | 4.1 | 96.8 |
| SMAJ64 | RL | ZL | 71.1 | 86.9 | 1.0 | 64 | 1.0 | 3.5 | 114 |
| SMAJ64A | RM | ZM | 71.1 | 78.6 | 1.0 | 64 | 1.0 | 3.9 | 103 |
| SMAJ70 | RN | ZN | 77.8 | 95.1 | 1.0 | 70 | 1.0 | 3.2 | 125 |
| SMAJ70A | RP | ZP | 77.8 | 86.0 | 1.0 | 70 | 1.0 | 3.5 | 113 |
| SMAJ75 | RQ | ZQ | 83.3 | 102 | 1.0 | 75 | 1.0 | 3.0 | 134 |
| SMAJ75A | RR | ZR | 83.3 | 92.1 | 1.0 | 75 | 1.0 | 3.3 | 121 |
| SMAJ78 | RS | ZS | 86.7 | 106 | 1.0 | 78 | 1.0 | 2.9 | 139 |
| SMAJ78A | RT | ZT | 86.7 | 95.8 | 1.0 | 78 | 1.0 | 3.2 | 126 |
| SMAJ85 | RU | ZU | 94.4 | 115 | 1.0 | 85 | 1.0 | 2.0 | 151 |
| SMAJ85A | RV | ZV | 94.4 | 104 | 1.0 | 85 | 1.0 | 2.2 | 137 |
| SMAJ90 | RW | ZW | 100 | 122 | 1.0 | 90 | 1.0 | 1.9 | 160 |
| SMAJ90A | RX | ZX | 100 | 111 | 1.0 | 90 | 1.0 | 2.1 | 146 |
| SMAJ100 | RY | ZY | 111 | 136 | 1.0 | 100 | 1.0 | 1.7 | 179 |
| SMAJ100A | RZ | <td>111</td> <td>123</td> <td>1.0</td> <td>100</td> <td>1.0</td> <td>1.9</td> <td>162</td> | 111 | 123 | 1.0 | 100 | 1.0 | 1.9 | 162 |
| SMAJ110 | VD | VD | 122 | 149 | 1.0 | 110 | 1.0 | 1.5 | 196 |
| SMAJ110A | SE | VE | 122 | 135 | 1.0 | 110 | 1.0 | 1.7 | 177 |
| SMAJ120 | SF | VF | 133 | 163 | 1.0 | 120 | 1.0 | 1.4 | 214 |
| SMAJ120A | VG | VG | 133 | 147 | 1.0 | 120 | 1.0 | 1.6 | 193 |
| SMAJ130 | SH | VH | 144 | 176 | 1.0 | 130 | 1.0 | 1.3 | 231 |
| SMAJ130A | VK | VK | 144 | 159 | 1.0 | 130 | 1.0 | 1.4 | 209 |
| SMAJ150 | SL | VL | 167 | 204 | 1.0 | 150 | 1.0 | 1.1 | 268 |
| SMAJ150A | VM | VM | 167 | 185 | 1.0 | 150 | 1.0 | 1.2 | 243 |
| SMAJ160 | SN | VN | 178 | 218 | 1.0 | 160 | 1.0 | 1.0 | 287 |
| SMAJ160A | SP | VP | 178 | 197 | 1.0 | 160 | 1.0 | 1.2 | 259 |
| SMAJ170 | SQ | VQ | 189 | 231 | 1.0 | 170 | 1.0 | 0.99 | 304 |
| SMAJ170A | SR | VR | 189 | 209 | 1.0 | 170 | 1.0 | 1.09 | 275 |
| SMAJ188 | ST | VT | 209 | 255 | 1.0 | 188 | 1.0 | 0.90 | 344 |
| SMAJ188A | SS | VS | 209 | 231 | 1.0 | 188 | 1.0 | 0.91 | 328 |

Notes:

- (1) Pulse test: $t_p \leq 50\text{ ms}$
- (2) Surge current waveform per Fig. 3 and derate per Fig. 2
- (3) For bi-directional types having V_{WM} of 10 V and less, the I_D limit is doubled
- (4) All terms and symbols are consistent with ANSI/IEEE C62.35
- (5) For the bi-directional SMAJ5.0CA, the maximum V_{BR} is 7.25 V
- (6) $V_F = 3.5\text{ V}$ at $I_F = 25\text{ A}$ (uni-directional only)

| THERMAL CHARACTERISTICS ($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted) | | | |
|--|-----------------|-------|--------------------|
| PARAMETER | SYMBOL | VALUE | UNIT |
| Typical thermal resistance, junction to ambient ⁽¹⁾ | $R_{\theta JA}$ | 120 | $^\circ\text{C/W}$ |
| Typical thermal resistance, junction to lead | $R_{\theta JL}$ | 30 | $^\circ\text{C/W}$ |

Note:

(1) Mounted on minimum recommended pad layout

| ORDERING INFORMATION (Example) | | | | |
|--------------------------------|-----------------|------------------------|---------------|------------------------------------|
| PREFERRED P/N | UNIT WEIGHT (g) | PREFERRED PACKAGE CODE | BASE QUANTITY | DELIVERY MODE |
| SMAJ5.0A-E3/61 | 0.064 | 61 | 1800 | 7" diameter plastic tape and reel |
| SMAJ5.0A-E3/5A | 0.064 | 5A | 7500 | 13" diameter plastic tape and reel |
| SMAJ5.0AHE3/61 ⁽¹⁾ | 0.064 | 61 | 1800 | 7" diameter plastic tape and reel |
| SMAJ5.0AHE3/5A ⁽¹⁾ | 0.064 | 5A | 7500 | 13" diameter plastic tape and reel |

Note:

(1) Automotive grade AEC Q101 qualified

RATINGS AND CHARACTERISTICS CURVES

($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)

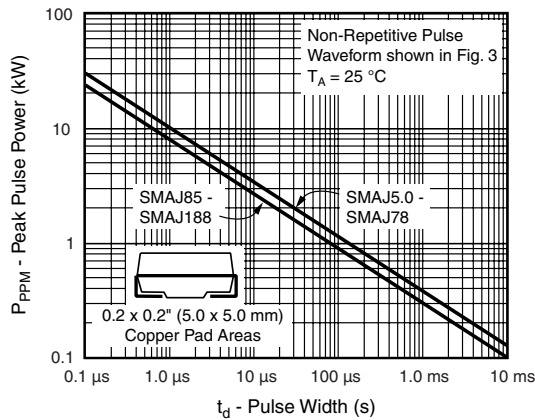


Figure 1. Peak Pulse Power Rating Curve

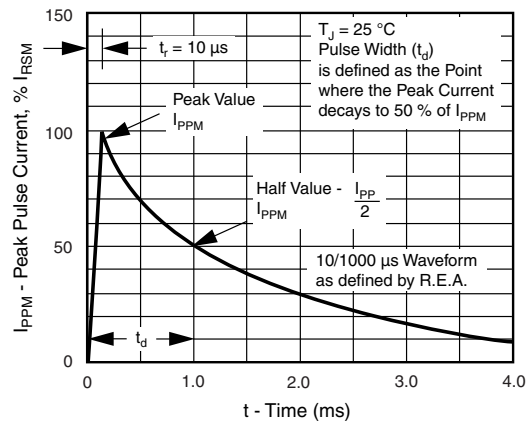


Figure 3. Pulse Waveform

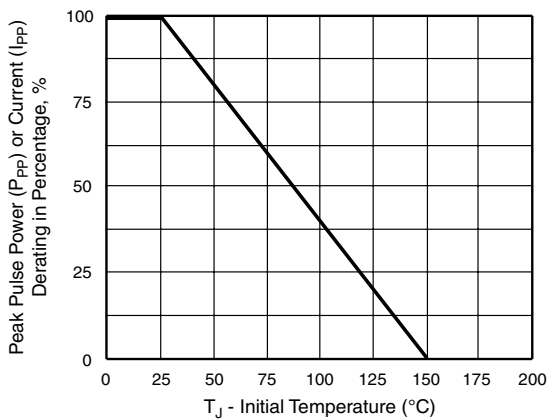


Figure 2. Pulse Power or Current vs. Initial Junction Temperature

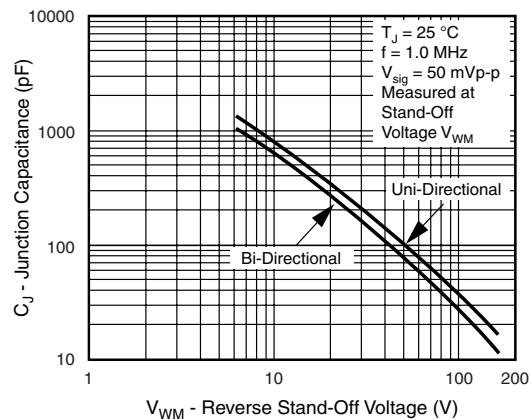


Figure 4. Typical Junction Capacitance

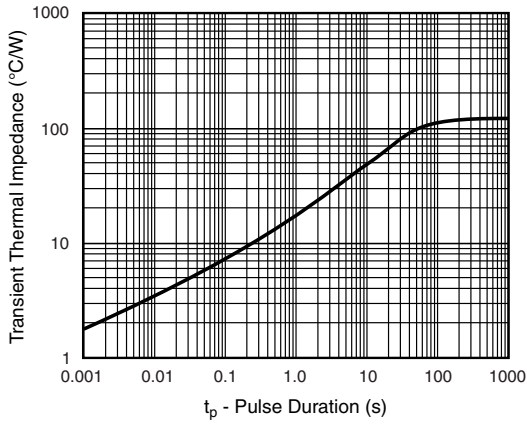


Figure 5. Typical Transient Thermal Impedance


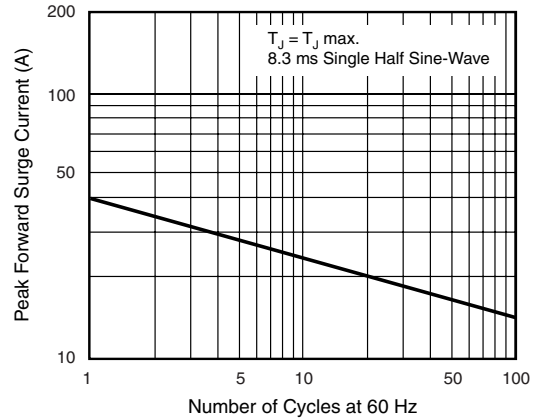



Figure 6. Maximum Non-Repetitive Forward Surge Current
Uni-Directional Only

PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

DO-214AC (SMA)

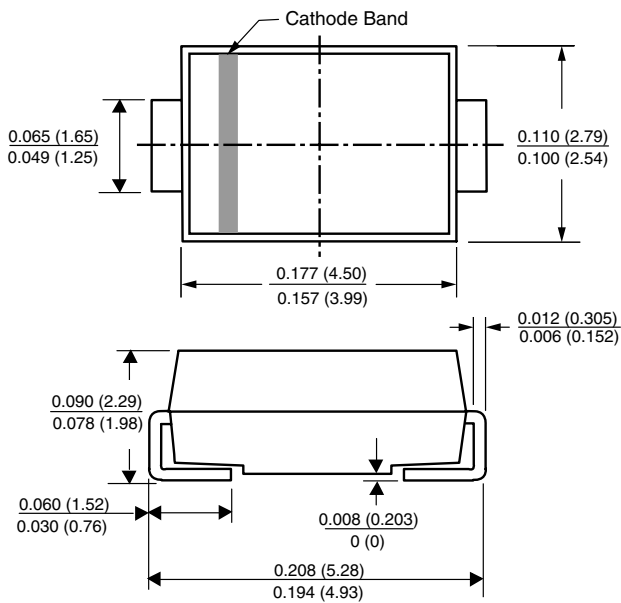

Mounting Pad Layout

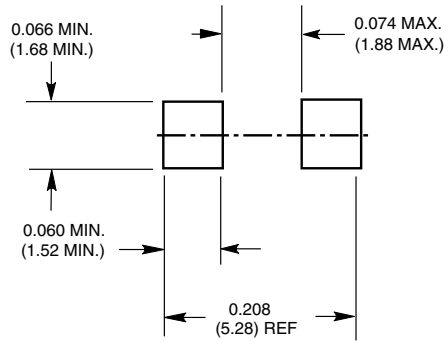



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.