



# KXTC9 Series

## Accelerometers and Inclinometers

### FEATURES

- Ultra-small Package - 3x3x0.9mm LGA
- Analog Output
- Low Power Consumption
- Factory-programmable Internal Low Pass Filter
- Low Noise
- Lead-free Solderability
- Excellent Temperature Performance
- High Shock Survivability
- User-definable Bandwidth
- Factory-programmable Offset and Sensitivity
- Self-test Function

### MARKETS

#### APPLICATIONS


- Cell Phones and Handheld PDAs*
  - Gesture Recognition
- Ultra-mobile PCs/Laptops/Hard Disk Drives*
  - Free-fall Detection
- Game Controllers & Computer Peripherals*
  - Inclination and Tilt Sensing
- Cameras and Video Equipment*
  - Image Stabilization
- Sports Diagnostic Equipment/Pedometers*
  - Static or Dynamic Acceleration

### PROPRIETARY TECHNOLOGY

The **KXTC9** series is designed to provide a high signal-to-noise ratio with excellent performance over temperature. These sensors can accept supply voltages between 1.8V and 3.6V. Sensitivity is factory programmable allowing customization for applications requiring from  $\pm 1.5g$  to  $\pm 6g$  ranges. Several pre-set internal low pass filters can eliminate the need for external filter capacitors. If the pre-set values are not optimal for an application, the sensor bandwidth is user-definable with the use of external capacitors.

These high-performance silicon micromachined linear accelerometers and inclinometers consist of a sensor element and an ASIC packaged in a 3x3x0.9mm Land Grid Array Dual (LGA). The sensor element is fabricated from single-crystal silicon with proprietary Deep Reactive Ion Etching (DRIE) processes, and is protected from the environment by a hermetically-sealed silicon cap at the wafer level.

The sensor element functions on the principle of differential capacitance. Acceleration causes displacement of a silicon structure resulting in a change in capacitance. An ASIC, fabricated using a standard CMOS manufacturing process, detects and transforms changes in capacitance into an analog output voltage, which is proportional to acceleration. The sense element design utilizes common mode cancellation to decrease errors from process variation and environmental stress.

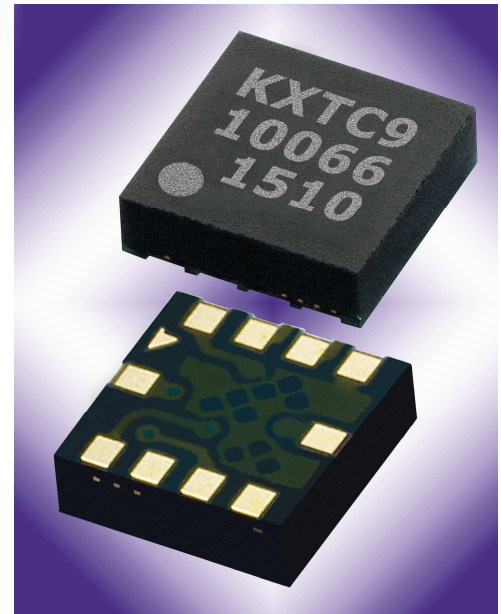

36 Thornwood Dr. - Ithaca, NY 14850 USA tel: 607-257-1080 - fax: 607-257-1146 - [www.kionix.com](http://www.kionix.com) - [info@kionix.com](mailto:info@kionix.com)

"Kionix" is a registered trademark of Kionix, Inc. Products described herein are protected by patents issued or pending. Information provided in this document is believed to be accurate and reliable but is not guaranteed. Kionix does not assume responsibility for its use or distribution. No license is granted by implication or otherwise under any patent or other rights of Kionix. Kionix reserves the right to change product specifications or discontinue this product at any time without prior notice.

© Kionix 2010 All Rights Reserved  
November 3, 2010 Rev. 0  
Page 1 of 2

# KXTC9 Series

## Accelerometers and Inclinometers

### PERFORMANCE SPECIFICATIONS

The performance parameters below are programmed and tested at 3.3 volts. However, the device can be factory programmed to accept supply voltages from 1.8V to 3.6V. Performance parameters will change with supply voltage variations.

PERFORMANCE SPECIFICATIONS			
PARAMETERS	UNITS	KXTC9-2050	CONDITION
Range <sup>1</sup>	g	±2.0	Factory programmable
Sensitivity	mV/g	660 typical	
0g Offset vs. Temp	mg/°C	±0.7 (xy) ±0.4 (z) typical	-40°C to +85°C
Sensitivity vs. Temp	%/°C	±0.01 (xy) ±0.04 (z) typical	-40°C to +85°C
Noise Density (on filter pins)	$\mu\text{g} / \sqrt{\text{Hz}}$	125 typical	
Mechanical Resonance <sup>2</sup>	Hz	3500 (xy) 1800 (z)	-3dB
LPF Bandwidth	Hz	50 default 100, 500, 1000, 2000, no filter (available settings)	Factory programmable
Non-Linearity	% of FS	0.1 typical	% of full scale output
Ratiometric Error	%	±0.3 (x,y) typical ±0.15 (z)	3.3V ± 5%
Cross-axis Sensitivity	%	2.0 typical	
Power Supply	V	3.3	Standard
Current Consumption	μA	240 typical	Operating
	μA	5 typical	Standby
ENVIRONMENTAL SPECIFICATIONS			
PARAMETERS	UNITS	KXTC9-2050	CONDITION
Operating Temperature	°C	-40 to +85 (consumer)	Powered
Storage Temperature	°C	-55 to 150	Un-powered
Mechanical Shock	g	5,000 for 0.5 ms 10,000 for 0.2 ms	Powered or un-powered halversine
ESD	V	2,000	Human body model

### NOTES

<sup>1</sup> Custom ranges from 1.5g to 6g available.

<sup>2</sup> Resonance as defined by the dampened mechanical sensor.

### ORDERING GUIDE

Product	Axis(es) of Sensitivity	Range (g)	Sensitivity (mV/g)	Offset (V)	Operating Voltage (V)	Temperature (°C)	Package
KXTC9-2050	XYZ	2	660	1.65	3.3	-40 to +85	3x3x0.9mm LGA