


# HZ0603B112R-10

UNCONTROLLED DOCUMENT



**PHYSICAL DIMENSIONS:**

A	1.60	[.063]	±	0.15	[.006]
B	0.80	[.031]	±	0.15	[.006]
C	0.80	[.031]	±	0.15	[.006]
D	0.36	[.014]	±	0.15	[.006]

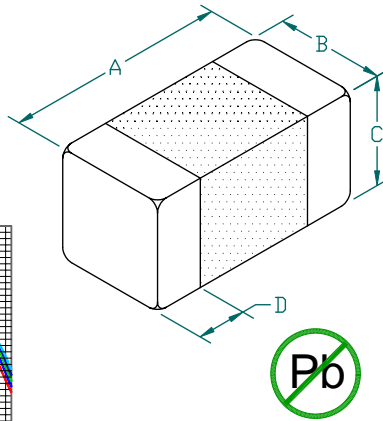


ELECTRICAL CHARACTERISTICS:		
Z @ 100MHz (Ω)	DCR (Ω)	Rated Current
Nominal	1100	
Minimum	825	
Maximum	1375	200 mA

- NOTES: UNLESS OTHERWISE SPECIFIED
1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 7" REELS, 4000 PCS/REEL.
  2. TERMINATION FINISH IS 100% TIN.
  3. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.

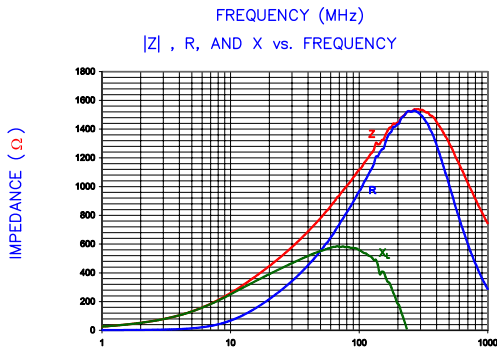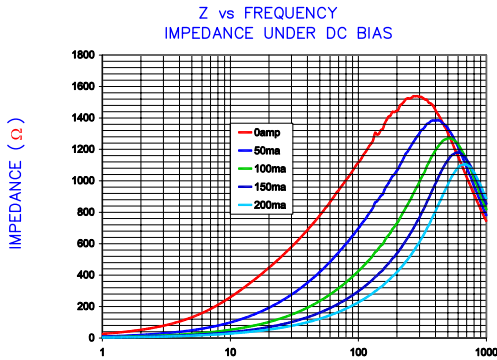


**LAND PATTERNS FOR REFLOW SOLDERING**



(For wave soldering, add 0.762 (.030) to this dimension)

**RECOMMENDED SOLDERING CONDITIONS**

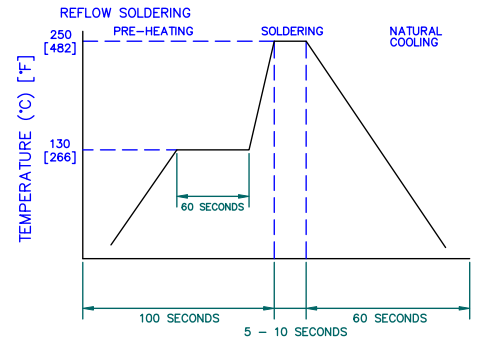

AGILENT E4991A RF Impedance/Material Analyzer  
HP 16194A Test Fixture. TEST REF. 3124

DIMENSIONS ARE IN mm [INCHES]				THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY AND CONFIDENTIAL TO STEWARD. NO PRODUCTION OR PUBLICATION OF THIS DOCUMENT IN WHOLE OR IN PART SHALL BE MADE WITHOUT WRITTEN AUTHORIZATION FROM STEWARD.			
				<b>Steward</b>			
PROJECT/PART NUMBER:				REV:	PART TYPE:	DRAWN BY:	
HZ0603B112R-10				A	CO-FIRE	TMB	
DATE:				SCALE:	SHEET:		
04/03/04				-	2 of 2		
REV	DESCRIPTION	DATE	INT	CAD #	TOOL #		
A	ORIGINAL DRAFT	04/03/04	TMB	HZ0603B112R-10-A	-		