



GBPC 40, 50 SERIES

High Current 40, 50 AMPS. Single Phase Glass Passivated Bridge Rectifiers







Voltage Range
50 to 1000 Volts
Current
40, 50.0 Amperes

Features

- ◇ UL Recognized File # E-96005
- ◇ Glass passivated junction
- ◇ The plastic material used carries Underwriters Laboratory Flammability Recognition 94V-0
- ◇ Integrally molded heatsink provide very low thermal resistance for maximum heat dissipation
- ◇ Universal 4-way terminals; snap-on, wrap-around, solder or P.C. board mounting
- ◇ Surge overload ratings 400 amperes
- ◇ Terminals solderable per MIL-STD-202, Method 208
- ◇ Typical I_R less than 0.2 μ A
- ◇ High temperature soldering guaranteed: 260°C / 10 seconds / .375", (9.5mm) lead lengths
- ◇ Isolated voltage from case to lead over 2500 volts

GBPC40

GBPC40-M



Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	-005	-01	-02	-04	-06	-08	-10	Units	
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V	
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V	
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V	
Maximum Average Forward Rectified Current @ $T_C = 55^\circ\text{C}$	$I_{(AV)}$	GBPC40 40.0				GBPC50 50.0				A
Peak Forward Surge Current, Single Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	GBPC40 400				GBPC50 400				A
Maximum Instantaneous Forward Voltage Drop Per Element at Specified Current	V_F	GBPC40 @20A 1.1				GBPC50 @25A				V
Maximum DC Reverse Current at Rated DC Blocking Voltage Per Element	I_R	10								μ A
Typical Thermal Resistance (Note 1)	$R\theta_{JC}$	1.5								$^{\circ}\text{C/W}$
Operating and Storage Temperature Range	T_J, T_{STG}	-50 to +150								$^{\circ}\text{C}$

Notes: 1. Thermal Resistance from Junction to Case.

2. Suffix "M" - Terminal Location Face to Face.

RATINGS AND CHARACTERISTIC CURVES (GBPC40005 THRU GBPC4010)
 (GBPC50005 THRU GBPC5010)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

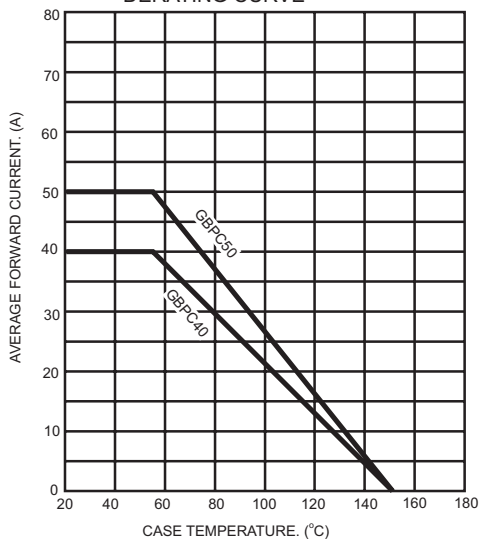


FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

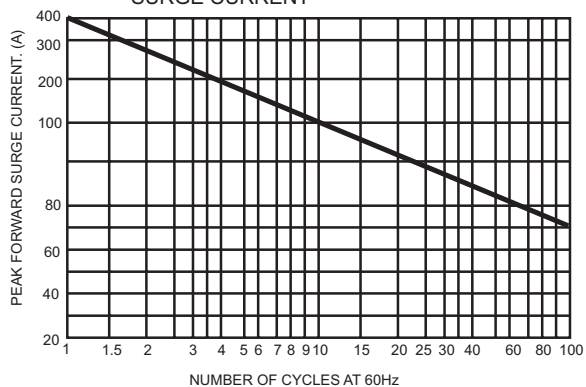


FIG.3- TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT

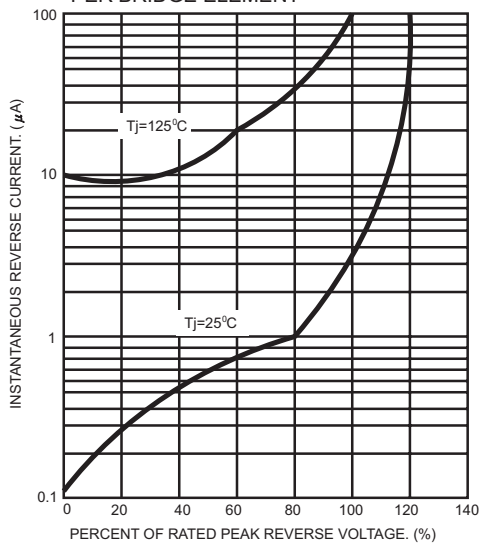


FIG.4- TYPICAL FORWARD CHARACTERISTICS PER BRIDGE ELEMENT

