


W92 Combination DIN and Flange Mount Power Relay/DPST-NO and DPDT 30 Amp Rating (DC and AC)

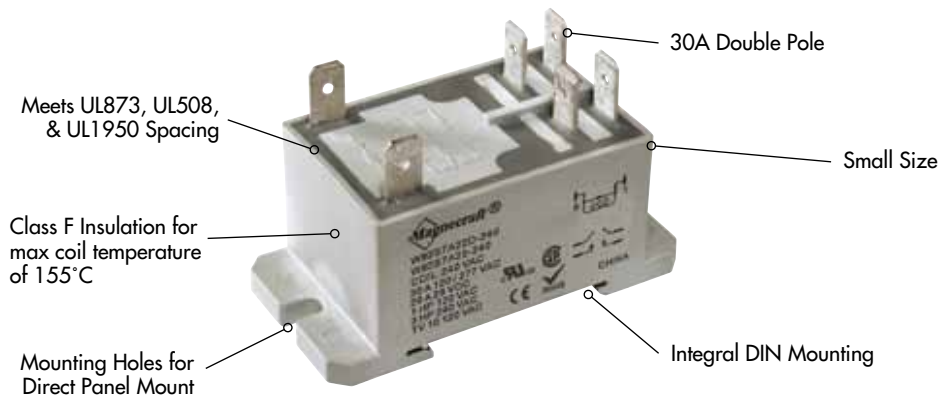

General Specifications

(UL 508)

		Units		Single Throw	Double Throw	
				W92S7	W92S11	
Contact Characteristics				DPST-NO	DPDT-NO	DPDT-NC
Number and type of Contacts				Silver Alloy	Silver Alloy	Silver Alloy
Contact materials				30	30	3
Thermal (Carrying) Current		A		300V	300V	300V
Maximum Switching Voltage		V		30A @ 277V 50/60Hz	30A @ 277V 50/60Hz	3A @ 277V 50/60Hz
Switching Current @ Voltage		~	Resistive	20A @ 28V	20A @ 28V	3A @ 28V
		≡	Resistive	3 @ 240V 50/60Hz	3 @ 240V 50/60Hz	-
			HP	1 @ 120V 50/60Hz	1 @ 120V 50/60Hz	-
			HP	720 VA	720 VA	-
Minimum Switching Requirement		Minimum	Pilot Duty	500 @ 12 VAC/VDC	500mA @ 12 VAC/VDC	100mA @ 6 VAC/VDC
			mA			
Coil Characteristics						
Voltage Range		~	V	12...240	12...240	
		≡	V	6...110	6...110	
Operating Range		% of Nominal		80% to 120%	80% to 120%	
		~		75% to 120%	75% to 120%	
Average consumption		~	VA	4	4	
		≡	W	1.7	1.7	
Drop-out voltage threshold		~		10%	10%	
		≡		10%	10%	
Performance Characteristics						
Electrical Life (UL 508)		Operations @ Rated Current	(Resistive)	100,000	100,000	
		Unpowered		5,000,000	5,000,000	
Mechanical Life				15	15	
Operating time (response time)			ms	4000	4000	
Dielectric		Between coil and contact	~	V	2000	2000
		Between poles	~	V	1500	1500
		Between contacts	~	V		
Environment						
Product certifications		Standard version		UL, CE, CSA	UL, CE, CSA	
Ambient air temperature around the device		Storage	°C	-40...+85	-40...+85	
		Operation	°C	-40...+55	-40...+55	
Vibration resistance		Operational	g-n	3, 10-55Hz	3, 10-55Hz	
Shock resistance			g-n	10	10	
Weight			grams	86	86	

Part Number Builder

W92	S	7	D	22D	-12
Series	Cover	Configuration	Current Type	Mounting	Voltage
W92	S = Sealed dust cover	7 = DPST-NO 11 = DPDT	A = AC D = DC	22D = DIN rail mount cover	Coil Voltage





Standard Part Numbers

BOLD-FACED PART NUMBERS ARE NORMALLY STOCKED

Nominal Input Voltage	Coil Resistance (OHMS)	DIN Part Number	Supersedes Part Number	Contact Configuration
24 VAC, 50/60 Hz	250 Ω	W92S7A22D-24	W92S7A22-24	DPST-NO
120 VAC, 50/60 Hz	1600 Ω	W92S7A22D-120	W92S7A22-120	DPST-NO
240 VAC, 50/60 Hz	6500 Ω	W92S7A22D-240	W92S7A22-240	DPST-NO
24 VAC, 50/60 Hz	250 Ω	W92S11A22D-24	W92S11A22-24	DPDT
120 VAC, 50/60 Hz	1600 Ω	W92S11A22D-120	W92S11A22-120	DPDT
240 VAC, 50/60 Hz	6500 Ω	W92S11A22D-240	W92S11A22-240	DPDT
12 VDC	86 Ω	W92S7D22D-12	W92S7D22-12	DPST-NO
24 VDC	350 Ω	W92S7D22D-24	W92S7D22-24	DPST-NO
110/125 VDC	7255 Ω	W92S7D22D-110	W92S7D22-110	DPST-NO
12 VDC	86 Ω	W92S11D22D-12	W92S11D22-12	DPDT
24 VDC	1600 Ω	W92S11D22D-24	W92S11D22-24	DPDT
110/125 VDC	6500 Ω	W92S11D22D-110	W92S11D22-110	DPDT

WIRING DIAGRAMS



ONLY NECESSARY TERMINALS ARE PRESENT ON SINGLE THROW STYLES

