


VS-BU-CD-1,0/14,4/0,2

Order No.: 1688997

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1688997>

Crimp contact, for D-SUB contact inserts with standard contact density, socket, connection cross section AWG 28 ... 24, turned, gold-plated

Commercial data	
GTIN (EAN)	 4 017918 822910
sales group	D502
Pack	30 pcs.
Customs tariff	85369010
Catalog page information	Page 324 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
05/26/2006

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Mechanical characteristics

Insertion/withdrawal cycles	≥ 200
Type of connection	Crimp connection
Conductor cross-section	0.08 mm ² ... 0.2 mm ²
Connection cross-section AWG	28 ... 24

Ambient temperature (operation)	-55 °C ... 125 °C
---------------------------------	-------------------

Material data

Contact material	Copper alloy
Contact surface material	Hard gold-plated over nickel

Electrical characteristics

Rated voltage (III/3)	125 V
Rated surge voltage	1 kV
Rated current	5 A
Insulation resistance	≥ 5 GΩ

Accessories


Item	Designation	Description
General		
1658794	VS-IET-DSUB-SIGNAL-STD	Insertion/extraction tool, to insert and extract the D-SUB standard signal contacts

Tools

1205448	CRIMPFOX RC 2,5	Crimping pliers. with positioner, for turned plug connector contacts 0.14 mm ² to 2.5 mm ²
---------	-----------------	--

Diagrams/Drawings

Dimensioned drawing

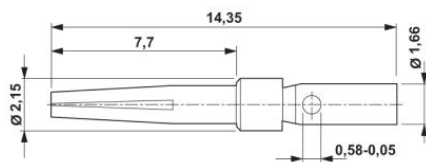

D-SUB crimp contact socket

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;