


**CK1,6-ED-2,50BU AG**

Order No.: 1663446

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1663446>Turned 1.6 crimp contact, individual female contact, core diameter 2.5 mm<sup>2</sup>, silver-plated**Commercial data**

GTIN (EAN)	 4 017918 123253
sales group	D090
Pack	100 pcs.
Customs tariff	85366990
Catalog page information	Page 528 (PC-2009)

**Product notes**WEEE/RoHS-compliant since:  
01/01/2006

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

**Technical data****Electrical characteristics**

Note	For HC-M-12, HC-M-EMC, HC-D, HC-DD and VC-D contact inserts, the quality of a crimp connection is determined by DIN EN 60 352-2
Ambient temperature (operation)	-40 °C ... 125 °C

**Mechanical characteristics**

Conductor cross-section	2.5 mm <sup>2</sup>
Connection cross-section AWG	14
Stripping length of the individual wire	6 mm
Conductor cross section AWG/kcmil min.	14
Conductor cross section stranded min.	2.5 mm <sup>2</sup>
Insertion/withdrawal cycles	≥ 500

**General characteristics**

Type	Individual female contact
Series	HC-M-12, HC-M-EMC; HC-D; HC-DD; VC-D

**Material data**

Contact material	Copper alloy
Contact surface material	hard-silver plated

**Certificates / Approvals**



Certification GOST, UL


**Accessories**

Item	Designation	Description
<b>General</b>		
1884869	VC-EW 1,6	Contact removal tool, for turned and rolled CK- 1.6-... contacts
<b>Tools</b>		
1676734	CK1,6/2,5-MWZ	Assembly tool, for CK 1.6... crimp contacts for small conductor cross sections
1687419	CRIMPFOX-1,6/2,5-ED-4,0	Crimping pliers, for turned contacts, CK 1.6 ED... and CK 2.5 ED...

## Diagrams/Drawings

### Dimensioned drawing

---

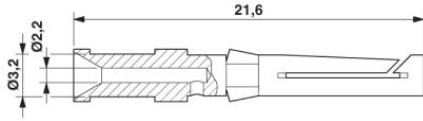

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachsmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact  
Technical modifications reserved;