

## UM-DELTA V/A/SI/BFI/TP

Order No.: 5603258




<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=5603258>

Fuse module with separable test sockets, fuse failure display and shield connection terminals (for analog cards of the Delta V control system)



### Commercial data

GTIN (EAN)	 4 017918 955038
sales group	I630
Pack	1 pcs.
Customs tariff	85369010
Catalog page information	Page 200 (IF-2009)

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### General data

Nominal voltage $U_N$	24 V DC
Max. current carrying capacity per branch	50 mA (in as-supplied state, with one 50 mA fuse, max. 1 A permitted)
Number of positions	16
Width	61 mm
Height	126 mm
Depth	71 mm
Ambient temperature (operation)	-20 °C ... 50 °C

---

Ambient temperature (storage/transport)	-20 °C ... 70 °C
Test voltage	500 V (50 Hz, 1 min.)
Mounting position	Any
Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103

**Connection data**

Connection 1	Field level
Type of connection	Screw connection
Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	7 mm
Screw thread	M3
Connection 2	Control system level
Type of connection	Flat-ribbon cable plug connector in acc. with IEC 60603-13
Number of positions	16

**Certificates / Approvals**




Certification

CUL, UL

Diagrams/Drawings

Circuit diagram

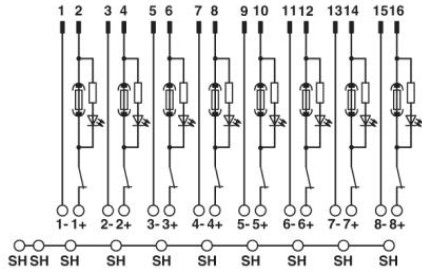

Connection scheme UM-DELTA V/A/SI/BFI/TP

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachsmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact  
Technical modifications reserved;