
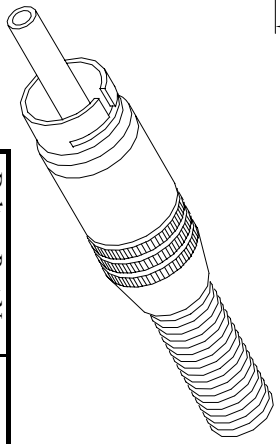


A range of high quality UK manufactured phono plugs made from machined brass with various plating options.

- Centre contact available in hollow tube.
- Ground contact with unique 'T' shape slot for maximum contact area.
- Internal cable clamp for secure cable connection.
- Spring strain relief.
- Colour coded ID rings for easy cable identification.
- Attractive body styling.
- Maximum cable size 5.5mm

Rating – 5A at 200 Vdc/150 Vac max.
 Insulation resistance – 100M Ω at 500 Vdc

Dimensions

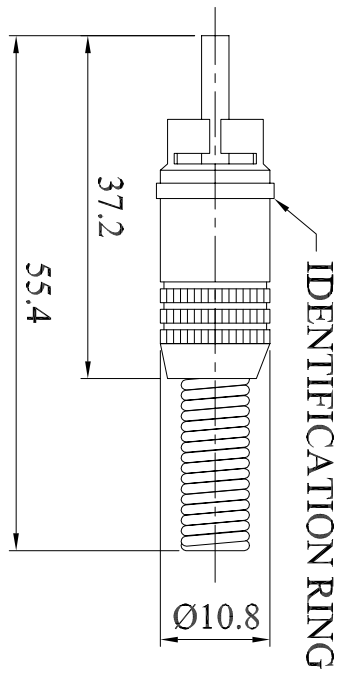


- Material :Brass, flash gold plated
- Centre contact :Brass, flash gold plated
- Ground contact :Brass, flash gold plated
- Insulation :Noryl SE1
- Cable clamp :Brass, flash gold plated
- Spring :Spring steel, black chrome plated
- Cap :Brass, black chrome plated

Deltron Part No.	Description
332-0000	FLASH GOLD PLUG ASSY/BLACK CHROME CAP & SPRING
332-0100	FLASH GOLD PLUG ASSY/BLACK CHROME CAP & SPRING (BLACK ID RING)
332-0200	FLASH GOLD PLUG ASSY/BLACK CHROME CAP & SPRING (BLUE ID RING)
332-0500	FLASH GOLD PLUG ASSY/BLACK CHROME CAP & SPRING (RED ID RING)
332-0600	FLASH GOLD PLUG ASSY/BLACK CHROME CAP & SPRING (WHITE ID RING)
332-0700	FLASH GOLD PLUG ASSY/BLACK CHROME CAP & SPRING (YELLOW ID RING)

CONVERTED FROM PS0356 ISS2 (04.01.94) IN JAN 2003

DrngNo 332 SERIES TITLE PROFESSIONAL PHONO LINE PLUG

ALL DIMENSIONS IN MM
 ANGLES IN DECIMAL DEGREES



ISS 2

GENERAL SPECIFICATION FOR 332 SERIES

CUSTOMER

FILTER REF

Scale: NTS

Sheet 1 / 1

