




Solid State Timers and Controllers

2710 DELAY-ON-BREAK TIMER

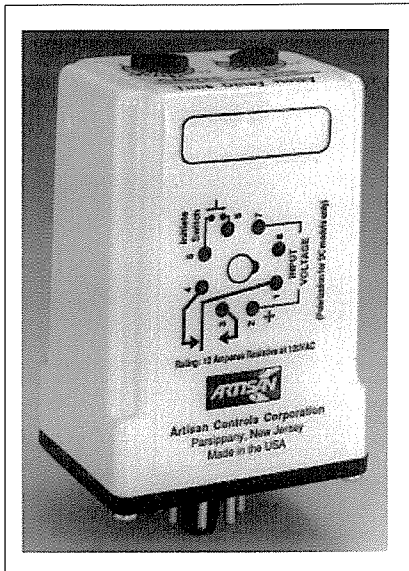

The 2710 is a DELAY-ON-BREAK timer controlling a SPDT set of relay contacts. The 2710 is available in a range of both AC and DC models. With operating voltage applied, the timer is in a stand-by mode. Closure of the INITIATE switch causes the output contacts to energize and remain energized until a preset timing period after the INITIATE switch opens. Re-closure of the INITIATE switch during timing resets the timer, keeping the output energized

SPECIFICATIONS

Timing Mode: DELAY-ON-BREAK Timing - Initiate switch controlled.

Operating Voltage: See *Ordering Information*.

Adjustable Timing Ranges: See *Ordering Information*.

Purchase Tolerance: Low time: +0%, -50%, High time: -0%, +50%.

Ex: Timing range -3, (2 - 1000 seconds), can range from 1 to 1500 seconds, with 2 - 1000 seconds as a guaranteed minimum range.

Repeatability Of Timing Periods: $\pm 2\%$

Timing/Temperature Coefficient: $\pm 0.25\%/^{\circ}\text{C}$

Output Relay: SPDT contacts - 12A at 125V AC UL E88991 & CSA LR90143, 10A 125V AC TUV R9452021.

Terminations: Octal plug-in type.



Dielectric: 1,200V rms between open contact sets, 1,500V rms between contacts and operating voltage terminals.

Transient Protection: Protected by silicon transient suppressors responding to transients within 1×10^{-12} seconds to a peak pulse power dissipation of 1500 watts.

Operating Temperature: 0°C to $+70^{\circ}\text{C}$

Data Sheet Revision Date: July 15, 1999

MECHANICAL & WIRING

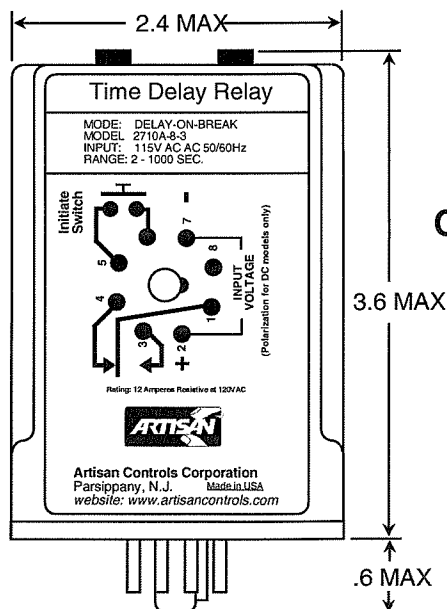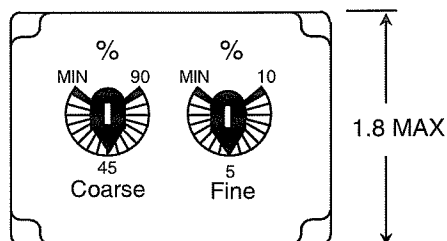

ORDERING INFORMATION

PART NUMBER	OPERATING VOLTAGE	TIMING RANGE (ALL TIMES IN SECONDS)
2710A -	-2 (12V DC)	-1 0.1 - 30.0
	-3 (24V DC)	-3 2 - 1000
	-6 (24V AC)	-5 30 - 8000
	-8 (115V AC)	

FOR OTHER VOLTAGES AND TIMING RANGES - CONSULT FACTORY

EXAMPLE: **MODEL 2710A - 2 - 1**
(12 DC WITH TIMING RANGE OF 0.1 TO 30 SECONDS)

VISIT OUR WEBSITE AT: WWW.ARTISANCONTROLS.COM

Notice: Artisan Controls Corporation assumes no responsibility for customers applications or product design.



Artisan Controls Corporation,
111 Canfield Ave, Bldg B15-18, Randolph, New Jersey 07869, USA
Tel: 973-598-9400 • Fax: 973-598-9410 • Toll Free: 800-457-4950
website: www.artisancontrols.com