



# CANTHERM

Supplying high-quality bimetal and thermal sensor products.

## MF58 Glass Shell Precision NTC Thermistors

The MF58 is a NTC thermistor which is manufactured using a combination of ceramic and semiconductor techniques. It is equipped with tinned axial leads and then wrapped with purified glass.



### Applications


Temperature compensation and detection for:

- Household appliances (air conditioners, microwave ovens, electric fans, electric heaters etc.)
- Office equipment (copiers, printers etc.)
- Industrial, medical, environmental, weather and food processing equipment
- Liquid level detection and flow rate measurement
- Mobile phone battery
- Apparatus coils, integrated circuits, quartz crystal oscillators and thermocouples.


### Features

- Good stability and repeatability
- High reliability
- Wide range of resistance: 0.1~1000K $\Omega$
- Tight tolerance on resistance and Beta values
- Usable in high-temperature and high-moisture environments
- Small, light, strong package,
- Suitable for automatic insertion on thru-hole PCBs
- Rapid response
- High sensitivity

### Specifications

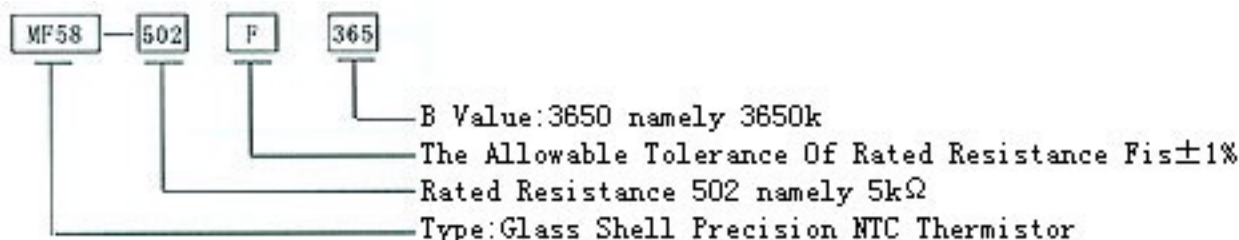

### Dimensions(mm)

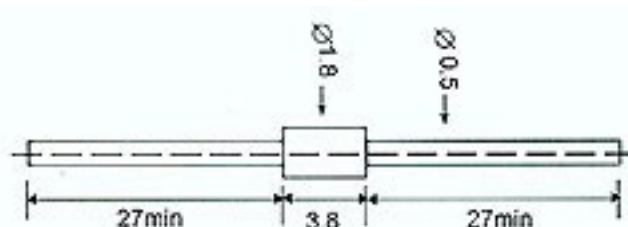

### Main Techno-Parameter

- Zero power resistance range (R25): 0.1~1000K $\Omega$
- Available tolerances of R25:  
F= $\pm 1\%$  G= $\pm 2\%$  H= $\pm 3\%$  J= $\pm 5\%$  K= $\pm 10\%$
- B value (B25/50°C) range: 3100~4500K
- Available tolerances of B value:  $\pm 0.5\%$ ,  $\pm 1\%$ ,  $\pm 2\%$
- Dissipation factor:  $\geq 2\text{mW}/^\circ\text{C}$  (In Still Air)
- Thermal time constant:  $\leq 20\text{S}$  (In Still Air)
- Operating temperature range:  $-55^\circ\text{C} \sim +200^\circ\text{C}$
- Rated Power:  $\leq 50\text{mW}$



CANTHERM

8415 Mountain Sights Avenue • Montreal (Quebec), H4P 2B8, Canada

Tel: (514) 739-3274 • 1-800-561-7207 • Fax: (514) 739-2902

E-mail: sales@cantherm.com • Website: www.cantherm.com

2008/Feb