MICRO SWITCH
FREEPORT, ILLINOIS U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH – BASIC

CATALOG LISTING
4TL1-72 SERIES
CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

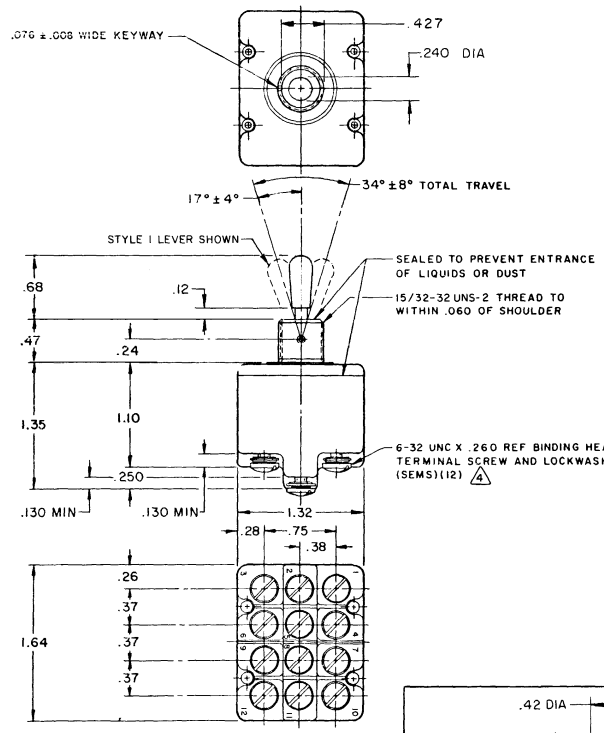



STYLE 2 LEVER

CAT. LIST. 6	AVAILABLE LOCKING COMBINATIONS (FOR CONFIGURATION SEE LETTERED DETAILS)	STYLE NO.	MILITARY RATING (AMPS) RESISTIVE LOAD DC VOLTS 28	125	250	AC VOLTS 125	250	LAMP LOAD 28 VDC	125 VAC	INDUCTIVE LOAD 28 VDC	125 VAC	CONTINUOUS	MS NUMBER
4TL1-72	NONE	1	18	.75	.5	11	6	4	2	10	8		27406-3
4TL1-72	E, L	2											27409-3

"A" 3 LOCKED IN THREE POSITIONS
"B" 3 LOCKED IN CENTER AND EXTREME POSITION (KEYWAY SIDE)
"D" 3 LOCKED OUT OF CENTER POSITION
"E" 3 LOCKED IN CENTER POSITION
"F" 3 LOCKED IN EXTREME POSITION (OPPOSITE KEYWAY)
"G" 3 LOCKED IN EXTREME POSITION (KEYWAY SIDE)

"H" 3 LOCKED OUT OF CENTER AND EXTREME POSITION (KEYWAY SIDE)
"J" 3 LOCKED OUT OF CENTER AND EXTREME POSITION (OPPOSITE KEYWAY)
"K" 3 LOCKED IN CENTER AND EXTREME POSITION (OPPOSITE KEYWAY)
"L" 3 LOCKED OUT OF EXTREME POSITION (KEYWAY SIDE)
"M" 3 LOCKED OUT OF AND INTO EXTREME POSITION (OPPOSITE KEYWAY)
"N" 3 LOCKED OUT OF EXTREME POSITION (OPPOSITE KEYWAY)

"P" 3 LOCKED OUT OF AND INTO EXTREME POSITION (KEYWAY SIDE)

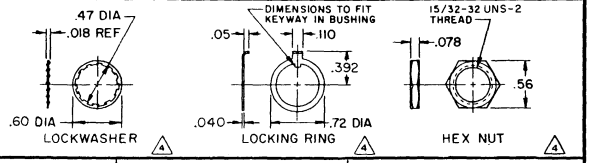

LEVER ON KEYWAY SIDE	LEVER IN CENTER	LEVER OPPOSITE KEYWAY

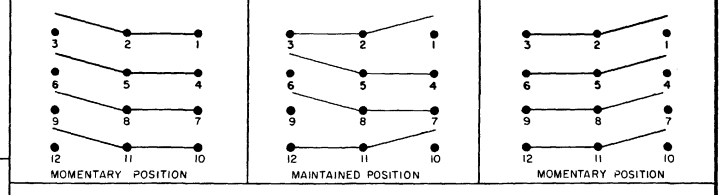

MOMENTARY POSITION | MAINTAINED POSITION | MOMENTARY POSITION

NOTES
1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
2 - CIRCUIT DESIGNATION, MICRO SWITCH CATALOG LISTING AND MS NUMBER MARKED ON SIDE OF SWITCH
3 KEYWAY SHOWN ON LEFT SIDE
4 FURNISHED UNASSEMBLED
5 - FOR TERMINAL COVER SEE MICRO SWITCH CATALOG LISTING 5PA9
6 SUFFIX LETTER MUST BE ADDED FOR DESIRED TYPE TOGGLE LOCKING SEE CHART FOR AVAILABLE LOCKING COMBINATIONS

10A-125, 250, 277 VAC
1/4HP-125VAC; 1/2HP-250, 277VAC
3A-125VAC "L" CODE L192

SCALE FULL
DO NOT SCALE PRINT
UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
ONE PLACE ±.01 ±.030
TWO PLACE ±.001 ±.015
THREE PLACE ±.0001 ±.005
ANGLES
WEIGHT

4TL1-72 SERIES CHART 1
PAGE 1 OF 1
MILITARY
DRAWING NUMBER M
INSTALLATION NO. CO-33059
ISSUE 8

REVISIONS
A CO-8150 J.A.K. 20 JUN 95
B C094441 LJK 23 NOV 99

FORMTEK
DRAWN D B W 21 JAN 74
CHECK
CHECK
CHECK
APPROVED

Downloaded from Elcodis.com electronic components distributor