

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	MIN	APPR
CF	39				
	C	REVISION PER ECO-05-005430	14.JUL.05	TW	JH

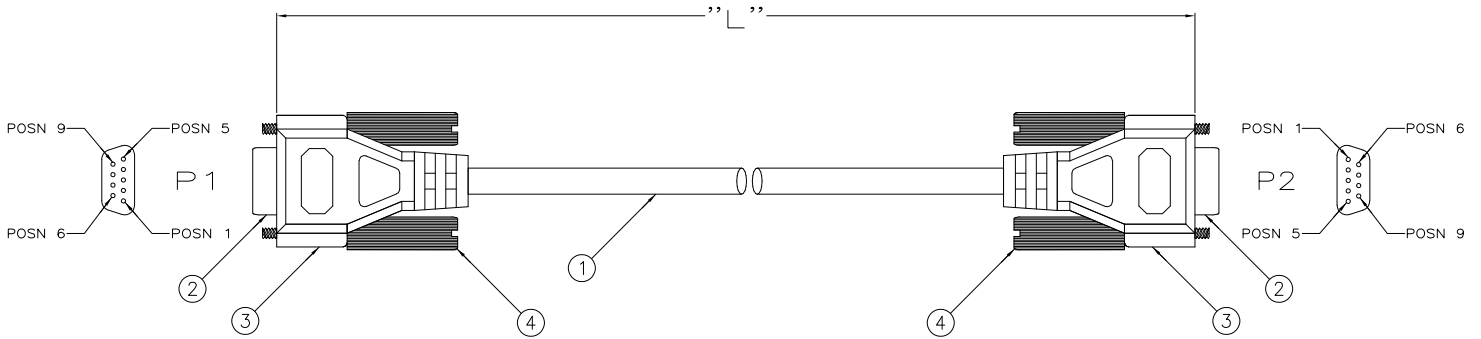

DB9 F	DB9 F
P1	P2
2	3
3	2
4	1
	6
5	5
6	4
1	
7	8
8	7
SHELL	SHELL

PART NO.	"L"(IN)	TOL.(IN)	LABEL XX'	
621850-1	72.00	+6.00/-2.00	6	OBSOLETE
621850-2	120.00	+6.00/-2.00	10	
621850-3	180.00	+6.00/-2.00	15	OBSOLETE

- △ 28 AWG, STRANDED TINNED COPPER, 7 COND WITH DRAIN, 100% ALUMINUM MYLAR FOIL PLUS 10% NOMINAL OVERLAP, BEIGE.
2. PACKAGED IN PRINTED ZIPLOCK POLYBAG.
3. LABEL ON POLYBAG TO READ AS FOLLOWS:

621850-__	PART NO.
XX' DB9 F/F NULL MODEM/SERIAL	XX' = LENGTH PER TABLE
COUNTRY OF ORIGIN	

- △ POSN'S 1 & 6 JUMPERED TOGETHER AND CONNECTED TO POSN 4.
5. THIS PRODUCT IS PRODUCED IN COMPLIANCE WITH ANSI/ASQC Z1.4-1993, TO AN INSPECTION LEVEL III, WITH A NORMAL SAMPLING PLAN.
6. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TYCO ELECTRONICS STANDARD 230-702.

#4-40 SLOTTED THUMBSCREW	4
OVERMOLD, PVC, BEIGE	3
CONNECTOR, DB9, FEMALE	2
CABLE, 7 CONDUCTOR △	1
DESCRIPTION	ITEM NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DATE	BY	APPROVED
D. EISENTRAUT		11-20-98		
D. WILSON		11-21-98		
R. CAPD		11-21-98		
PRODUCT SPEC				
APPLICATION SPEC				
WEIGHT				
RESTRICTED CUSTOMER				

INCHES	0 PLG ± .010	1 PLG ± .010	2 PLG ± .010	3 PLG ± .010	4 PLG ± .010	5 PLG ± .010	6 PLG ± .010	7 PLG ± .010	8 PLG ± .010	9 PLG ± .010
MATERIAL	FINISH									

TYCO Electronics	Tyco Electronics Corporation	Harrisburg, Pa 17105-3608
CABLE ASSY, DB9 TO DB9 (FEMALE), OVERMOLDED		
SIZE	QAGE CODE	DRAWING NO.
A2	00779	C-621850
RESTRICTED TO	SCALE	SHEET
	N.T.S.	1 OF 1