




ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART, CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG

REVISIONS


DOC. NO. SPC-F005 \* Effective: 7/8/02 \* DCP No: 1398

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1906	A	RELEASED	EO	04/17/06	TL	05/25/06	HO	05/25/06

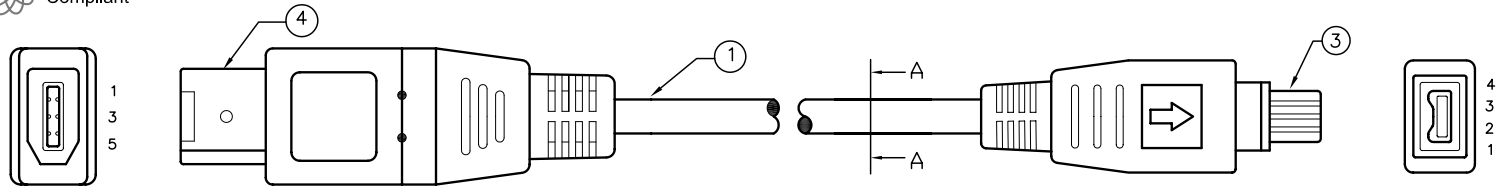

6PIN MALE

4PIN MALE

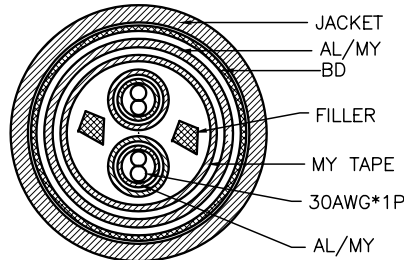

SECTION A-A

SPC TYPE No.	LENGTH
SPC20016	72±1 [1829±25.4]
SPC20014	120±2 [3048±50.8]
SPC20015	180±2 [4572±50.8]

PIN OUTS	
1394-6PIN-MALE	1394-4PIN-MALE
1	3 RED
2	4 GREEN
3	1 ORANGE
4	2 BLUE
5	Shell
6	Shell
Shell	OUTER BRAID NC

NOTES:

- CABLE: [30AWG(7/0.103)/1P+AL/MY+SPIRAL(50/0.10)]  
\*2C+FILLER+MY+90%BD(24/5/0.12/)]TIN  
INSULATION WIRE ONE: FO-PE, OD=φ0.88±0.05MM  
COLOR: RED&GREEN, BLUE&ORANGE  
JACKET: 80°C PVC, OD=φ4.8±0.15MM  
COLOR: PLATINUM GRAY
- PVC: PLATINUM GRAY
- CONNECTOR: 1394 4P MALE NICKEL-PLATING INSULATOR COLOR: BLACK
- CONNECTOR: 1394 6P MALE NICKEL-PLATING INSULATOR COLOR: BLACK

DISCLAIMER:  
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE THE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:  
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
EKLAS ODISH	04/17/06
CHECKED BY:	DATE:
THOMAS LEE	05/25/06
APPROVED BY:	DATE:
HISHAM ODISH	05/25/06

DRAWING TITLE: Firewire Cable, Host to Device, 6 pin/M - 4 pin/M			
SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	TA-740	TA-740.DWG	A
SCALE: NTS	U.O.M.: INCHES [mm]	SHEET: 1 OF 1	