


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

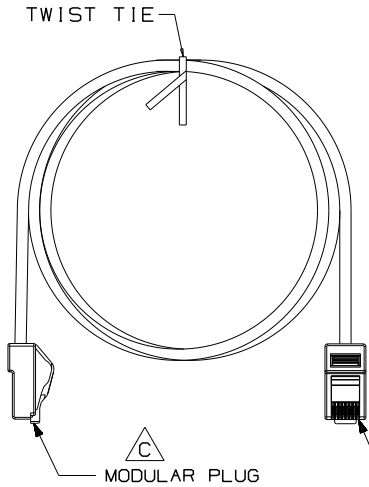

PANDUIT PART NUMBER	MIN. CABLE LENGTH
NK5EPC3**Y	3 FT.
NK5EPC5**Y	5 FT.
NK5EPC7**Y	7 FT.
NK5EPC10**Y	10 FT.
NK5EPC14**Y	14 FT.
NK5EPC20**Y	20 FT.
NK5EPC1M**Y	1 METER
NK5EPC2M**Y	2 METERS
NK5EPC3M**Y	3 METERS
NK5EPC5M**Y	5 METERS

NOTES:

IDENTIFICATION:

- 1. SEE CURRENT NETKEY CATALOG FOR PACKAGE QUANTITIES AND AVAILABLE COLORS.
- 2. SEE CATALOG FOR A COMPLETE LIST OF PARTS APPLICABLE FOR USE WITH THIS PART.
- △B 3. TERMINATED WITH (8-POSITION) MODULAR PLUGS ON BOTH ENDS PER T568A.
- 4. CONSTRUCTED WITH 4-PAIR/24 AWG STRANDED UTP CAT 5e NON-PLENUM PATCH CABLE.
- 5. MATERIAL:
PLUG: POLYCARBONATE

△D T568A WIRING SCHEME

PLUG POSITION	CABLE WIRE
1	WHITE GREEN
2	GREEN
3	WHITE ORANGE
4	BLUE
5	WHITE BLUE
6	ORANGE
7	WHITE BROWN
8	BROWN

MODEL FILENAME		D35123CT_CAT5100_07	SIZE
DRAWING FILENAME		M02479LL_DC299_00B.PRT	A
TITLE			
NETKEY CATEGORY 5e PATCH CORD CUSTOMER DRAWING			
PANDUIT TM CORP. TINLEY PARK, ILL 60477		I.I. NUMBER	PRODUCT SPEC
ALL DIMENSIONS ARE GIVEN IN INCHES. UNLESS OTHERWISE SPECIFIED.		WORK INSTRUCTION	SCALE
DIMENSIONAL TOLERANCES ARE: (.X) ±.03 (.XXX) ±.005 (.XX) ±.01 ANGLES ± 1°		SCALE	NONE
THIRD ANGLE PROJECTION	DRAWN BY	REVIEW DRAWING NUMBERS	PART NO.
	NER		NK5EPC**Y
DATE	3-21-06		DRAWING NO.
CHK'D	WJC		02479-299

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
J	5-29-07	BJN	EJH	D. ADDED T568A WIRING SCHEME C. MODULAR WAS PANDUIT B. ADDED NOTES 3-5 A. ADDED METRIC LENGTHS	02479-299		REGA		
R	3-21-06	NER	WJC	RELEASED TO PRODUCTION	02479-299		RMD		