MICRO SWITCH
FREEPORT, ILLINOIS, U S A
A DIVISION OF HONEYWELL
FED. MFG. CODE 01929

SWITCH - ENCLOSED

CATALOG LISTING
BZLN-LH3

M

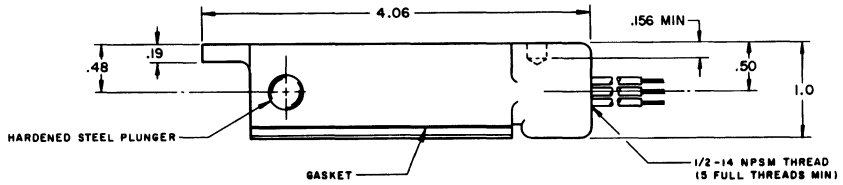

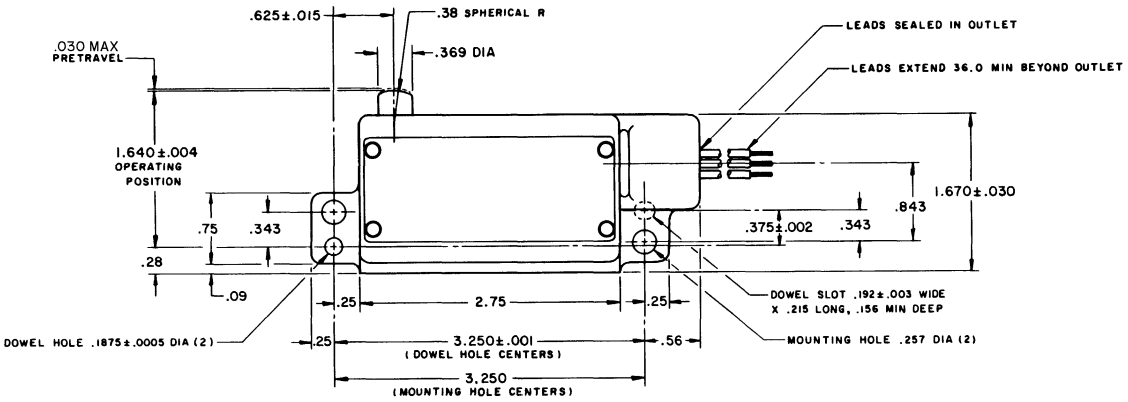

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	
OPERATING FORCE — — — — 5 LB MAX	CONTACT ARRANGEMENT S P D T	SCALE FULL DO NOT SCALE PRINT
RELEASE FORCE — — — — 1 LB MIN	-L96- 15 A-125, 250, OR 480 VAC 1/2 A-125 VDC; 1/4 A-250 VDC 1/8 HP-125 VAC; 1/4 HP-250 VAC	UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES TOLERANCES ARE: ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±2°
DIFFERENTIAL TRAVEL — — —.004 MAX		
OVERTRAVEL — — — — —.203 MIN		WEIGHT .720 LB PLUS LEADS

WIRING CONNECTIONS -
COMMON - BLACK LEAD
NORMALLY OPEN - BLUE LEAD
NORMALLY CLOSED - RED LEAD

BZLN-LH3 | M | ISSUE 18 | DRAWING NUMBER | RELEASE NO. | REPLACES | CHECK

REVISIONS
A C011950 M B F 10 NOV 64
B C050714 A J W 27 APR 82
C C055988 M A M 31 OCT 84
D C0-81715 T A F 26 SEP 95

DRAWN M B F 10 NOV 64 CHECK P A N 16 NOV 64 CHECK

FORMTEK

Downloaded from Elcodis.com electronic components distributor