


## Description

The model 710 AC hour meters and minute meters are widely used in panel applications where number size and visibility are critical. Its tough, Lexan bezel and distinctive styling enhance appearance and durability. Available in 5 figure reset or 6 figure non-reset versions.


Features		Options
• To	arge figures bugh, Lexan case eset or non-reset ions	<ul> <li>Private label faceplates</li> <li>Bracket mount</li> <li>Mounting bracet (721-0003)</li> <li>Splash proof kit (721-0017)</li> <li>Heavy duty splash proof kit (721-0018)</li> <li>Gasket (17210-004s)</li> </ul>
Figures: Reset: Voltages: Power: Mounting:	5 figures, 9999.9 (reset) or 6 figure, 99999.9 (non-reset), 0.19" [5mm] high Reset (on front or side) or non-reset 24, 115 or 230VAC, (+/-10%), 50 or 60 Hz. 3 watts (nominal) Panel (3-hole)	Terminations:8" [203.2mm] wire leads or terminal blockTemp. Range:-20°F to +160°F [-29°C to +71°C]Approvals:UL Recognized, CE CompliantWeight:6 oz. [170g]
Models	Description	Models Description
710-0001 710-0002 710-0003 710-0006 710-0008 710-0009 710-0013 * Items i	115VAC/60Hz, non-reset, 99,999.9 hrs, 8" [203mm] wire leads 115VAC/60Hz, non-reset, 99,999.9 hrs, 8" [203mm] wire leads 230VAC/60Hz, non-reset, 99,999.9 hrs, 8" [203mm] wire leads 24VAC/60Hz, non-reset, 99,999.9 hrs, 8" [203mm] wire leads 115VAC/60Hz, non-reset, 99,999.9 hrs, 8" [203mm] wire leads 115VAC/50Hz, non-reset, 99,999.9 hrs, 8" [203mm] wire leads 115VAC/60Hz, front reset, 99,999.9 hrs, 8" [203mm] wire leads	710-0014         230VAC/60Hz, non-reset, 99,999.9 hrs, terminal block           710-0018         115VAC/60Hz, non-reset, 99,999.9 min, 8"[203mm] wire leads           710-0024         24VAC/60Hz, non-reset, 99,999.9 hrs, terminal block           710-0026         115VAC/50Hz, non-reset, 99,999.9 hrs, terminal block           710-0026         115VAC/60Hz, non-reset, 99,999.9 hrs, terminal block           710-0032         115VAC/60Hz, front reset, 9,999.9 hrs, terminal block           710-0051         115VAC/60Hz, non-reset, 99,999 hrs, terminal block

\* Items in bold are normally in factory stock.

## Dimensions

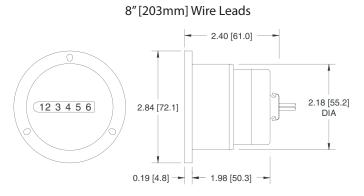

Mounting holes: For #4 screws on 2.44" [62.0] B.C. and #6 screws on 2.53" [64.3] B.C. Panel cutout: 2.21" [56.1] Dia.

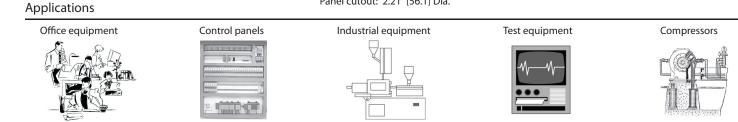

## www.redingtoncounters.com