


Visual Signals FLASHING FILAMENT > AUDIBLE BEACONS

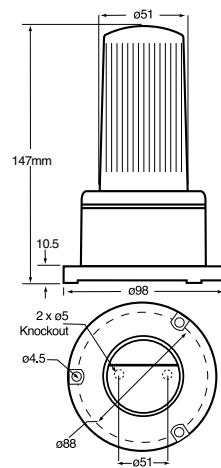

Industrial Flashing Filament Beacons: Audible Beacons > FFA125 Series

Product overview

The FFA125 Series operates through an internal circuit which simply cycles the lamp On and Off. These type of beacons generally give a much lower light output as it takes longer for the lamp to fully illuminate itself. These units are available with a

filament lamp. In terms of light coverage, this type of beacon is more efficient as it illuminates the whole surface of the beacon constantly through 360 degrees. The FFA Series also incorporates a Piezo Buzzer producing 85db @ 1 meter giving the user the peace of mind of two signals. Ideal for close-up signalling applications.

FEATURES

- Continuously rated
- Easy to clean external lens
- Suitable for surface mounting
- Optional protective guard available - see accessory page
- 360° visibility
- Two signals in one unit
- IP65

MATERIAL

- UV Stable Polycarbonate Lens
- UV Stable ABS Plastic Base

Code No:	Voltage:	Light Source:	Current:
FFA125-80	12v Dc ---	Ba15d x 21w	1.80 A
FFA125-81	24v Dc ---	Ba15d x 21w	0.90 A
FFA125-82	115v Ac ~	Ba15d x 15w	0.15 A
FFA125-83	230v Ac ~	Ba15d x 15w	0.08 A



Kg 0.25

50/60 Hz

°C -25+66

IP 65

FPM 60

dB 85

APPROVAL AND CONFORMITIES



ADD THE FOLLOWING LENS CODES TO THE PRODUCT CODE WHEN ORDERING



INDUSTRIAL