



TO ORDER, CALL 909-625-9390


**EPA-3A
SPA-3A**




**EPA-3B
SPA-3B**




**EPA-3C
SPA-3C**




**EPA-3D
SPA-3D**




**EPA-3E
SPA-3E**




**EPA-3F
SPA-3F**






SPA-3G



**EPA-3H
SPA-3H**



**EPA-3J
SPA-3J**

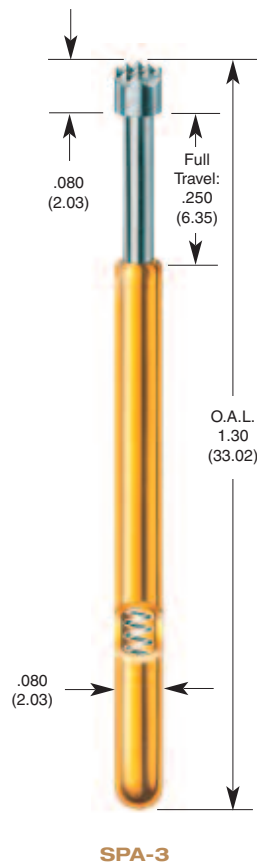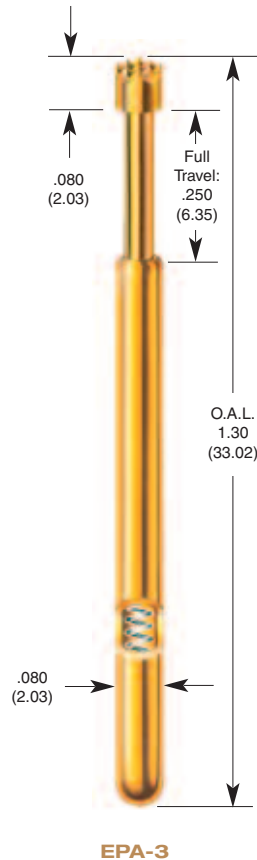

Probe Specifications EPA-3 SPA-3

Mechanical		
Full Travel:	.250 (6.35)	.250 (6.35)
Recommended Working Travel:	.167 (4.24)	.167 (4.24)
Mechanical Life Exceeds:	2 x 10 ⁶ cycles	2 x 10 ⁶ cycles
Operating Temperature		
Standard spring:	-55°C to +85°C	-55°C to +85°C
Alternate/Ultra High spring:	-55°C to +150°C	-55°C to +150°C
Consult factory for other temperature requirements, and applications below -40° C.		
Electrical (Static Conditions)		
Current Rating:	6 amps	6 amps
Maximum continuous current, non-inductive at working travel		
Average Probe Resistance	50 mΩ	50 mΩ
Materials and Finishes		
Plunger:	Heat-treated beryllium copper, gold plated over hard nickel	Heat-treated beryllium copper, rhodium plated over hard nickel
Barrel:	Work-hardened nickel silver, gold plated over hard nickel	Work-hardened nickel silver, gold plated over hard nickel
Spring:		
Standard:	Beryllium copper, silver plated	Beryllium copper, silver plated
Alternate:	Stainless steel, silver plated	Stainless steel, silver plated
Ultra High:	Stainless steel	Stainless steel
Ball:	Brass, gold plated	Brass, gold plated

Receptacle Specifications


Mounting Hole Size:	.094/.096 (2.39/2.44)	.094/.096 (2.39/2.44)
A #41 or 2.4 mm drill is most commonly used.		
Recommended Wire Gauge:	22-26 AWG	22-26 AWG
Connections:	SPR-3W Crimp or push-on termination (AMP terminal 60983-1 or equivalent) SPR-3W-1 Solder cup SPR-3W-2 wire wrap/square post SPR-3Y Push-on termination (AMP terminal 42827-2 or equivalent)	SPR-3W Crimp or push-on termination (AMP terminal 60983-1 or equivalent) SPR-3W-1 Solder cup SPR-3W-2 wire wrap/square post SPR-3Y Push-on termination (AMP terminal 42827-2 or equivalent)
Materials and Finishes		
Housing:	Work-hardened nickel silver, gold plated over hard nickel	Work-hardened nickel silver, gold plated over hard nickel
Square Post:	Phosphor bronze, gold plated	Phosphor bronze, gold plated

Spring Force in oz. (grams)


Spring Type	Preload	2/3 Travel
Standard	as shown 1.60 (45)	4.5 (126)
Alternate	-1 2.52 (71)	6.5 (184)
Ultra High	-2 4.18 (119)	11.7 (332) (SPA only)

To order, add dash number to Model Number.
 Optional spring forces and materials are available.


SPR-3W

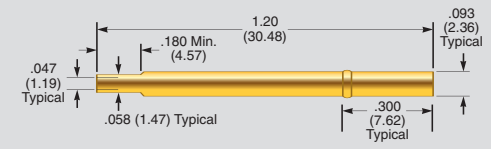


SPR-3W-1



SPR-3W-2



SPR-3Y



General Purpose Probes



Actual Size

Note: EPA tips shown for reference. Dimensions in inches (millimeters)