


# Non-coated

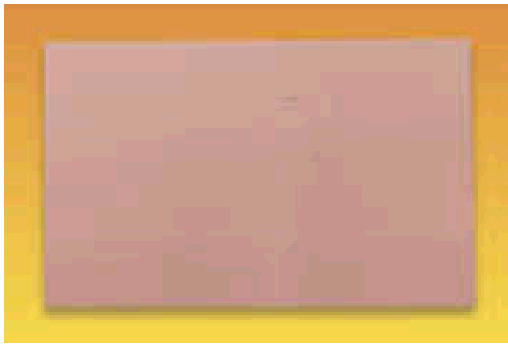

- Single and double sided copper clad epoxy glass FR4
- Suitable for direct transfer of artwork
- Note the board may need cleaning prior to use with eraser/cleaner (141-330)
- Exposed copper cladding is removed using ferric chloride solution (Order Code 141-311 or 149-080)

Manufactured in accordance with **BS4584 Part 3**

Board thickness 1.6mm

Copper content 305 g/m sq (1oz/ft<sup>2</sup>)

Copper thickness (0.0014")305 g/m sq

PCB61

**149-054** 160 x 100

**149-055** 220 x 100

**149-056** 233.4 x 160

**149-057** 457 x 305

## **Double sided**

**149-058** 160 x 100

**149-059** 220 x 100

**149-060** 233.4 x 160

**149-061** 457 x 305