

4

3

2

1


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	QST	REVISIONS			
P	LTR	DESCRIPTION	DATE	MIN	APD
HC	00				
	B	RELEASE PER ECO-09-016735	17Jul09	AM	BOB


NOTES:

- DESIGNED FOR USE WITH TIMES LMR-240 CABLE
- CRIMP FERRULE TO A .255 HEX
- ASSEMBLE USING IS SHEET 408-8814

- ① BRASS
- ② STAINLESS STEEL
- ③ BERYLLIUM COPPER
- ④ PTFE
- ⑤ SILICONE RUBBER
- ⑥ GOLD PLATE
- ⑦ NICKEL PLATE
- ⑧ PASSIVATE
- ⑨ WHITE BRONZE

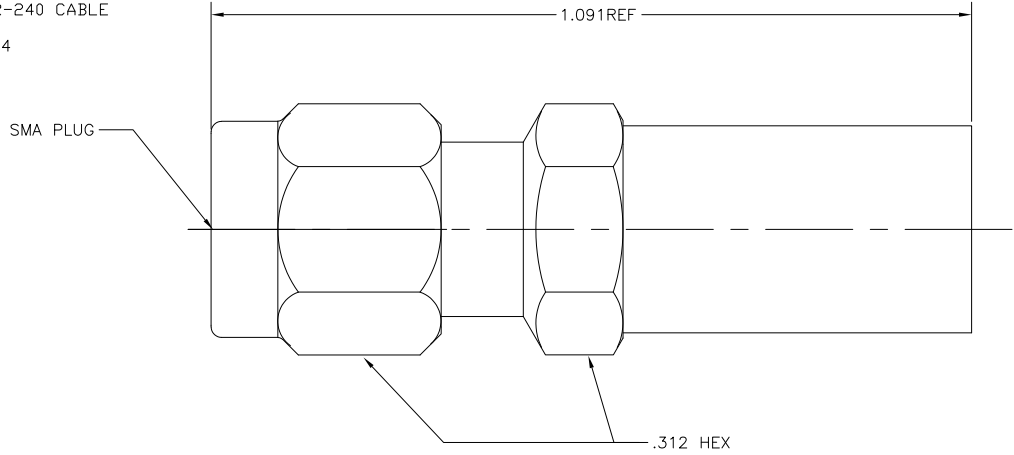

CABLE PREPARATION SCALE: NTS

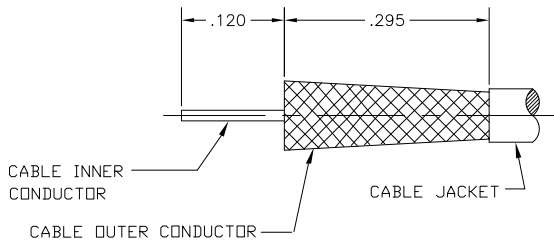

① ②	⑤	④	① ⑥	③	① ①	1408442-3
① ①	⑤	④	① ⑥	③	① ①	1408442-1
FERRULE	GASKET	DIELECTRIC	CONTACT	RETAINING RING	HOUSING & COUPLING NUT	TE P/N
THIS DRAWING IS A CONTROLLED DOCUMENT.		Doc ID: 22Aug2002	Tyco Electronics Corporation Kunshan, Jiangsu, RPC215321			
DIMENSIONS: INCHES		TO DIMENSIONS OF DRAWING, UNLESS SPECIFIED:	PRODUCT SPEC: 108-1574	SMA STRAIGHT CABLE PLUG CRIMP ATTACHMENT		
① PLC ± .005		② PLC ± .005	APPLICATION SPEC: 408-8814	SIZE: A2	CAGE CODE: 00779	DRAWING NO: C=1408442
MATERIAL: -		FINISH: -	WEIGHT: -	RESTRICTED TO: -		
CUSTOMER DRAWING			SCALE: 10:1	SHEET: 1	OF: 1	REV: B

AMP 1471-9 REV 31MAR2000

H\

1408442

B

A