







ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG

REVISIONS

DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1902	A	RELEASED	EO	05/08/06	TL	06/15/06	HO	06/15/06

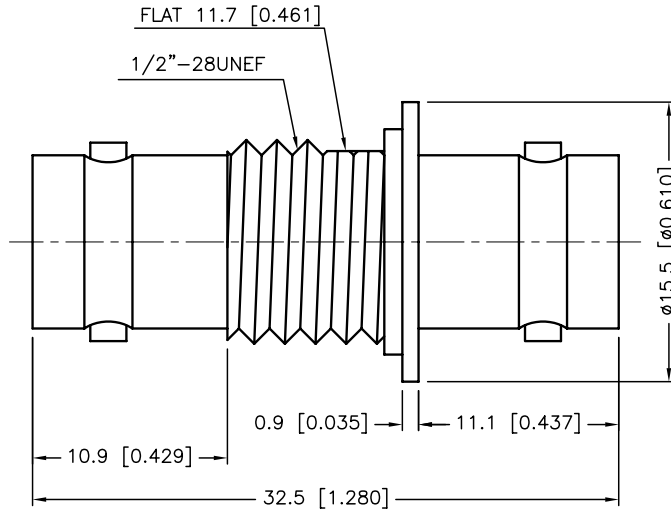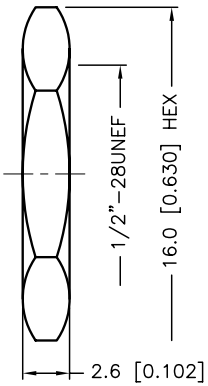

MOUNTING HOLE

NO	DESCRIPTION	MATERIAL	Q'TY	FINISH
6	INSULATION	POM	2	NONE
5	CENTER CONTACT	BRASS	1	GOLD
4	BODY	BRASS	1	NICKEL 100 μ" MIN.
3	WASHER	BRASS	1	NICKEL 100 μ" MIN.
2	WASHER	IRON	1	NICKEL 100 μ" MIN.
1	NUT	BRASS	1	NICKEL 100 μ" MIN.

SPECIFICATIONS:

- 1- BODIES: BRASS PER JIS-C3604
- 2- CENTER CONTACT: BRASS PER JIS-C2680
- 3- CONNECTOR INTERFACE PER MIL-STD-348A
- 4- PART TO BE CLEAN AND FREE OF BURRS

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

.X=±0.2
.XX=±0.1
.XXX=±0.05
ANGLE=±5°

DRAWN BY:	DATE:
EKLAS ODISH	05/08/06
CHECKED BY:	DATE:
THOMAS LEE	06/15/06
APPROVED BY:	DATE:
HISHAM ODISH	06/15/06

DRAWING TITLE:
BNC Coax Adapter, Female/Female, Bulkhead, 50 Ohms

SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	SPC20104	82K9784.DWG	A
SCALE: NTS	U.O.M.: mm [Inches]	SHEET: 1 OF 1	