MALE-FEMALE RIGHT ANGLE ADAPTER

-

R143.770.000

Series : **TNC**

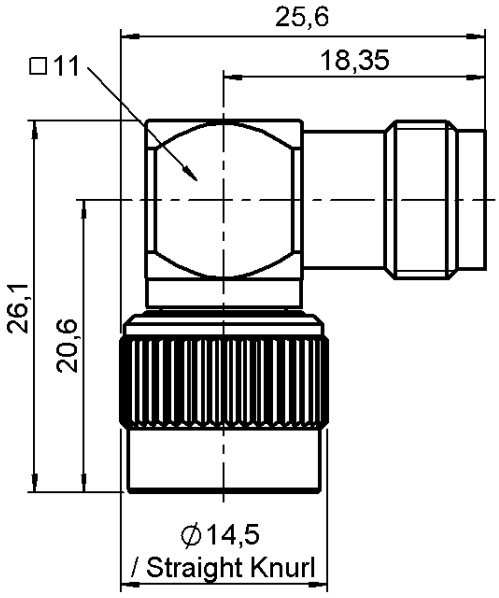



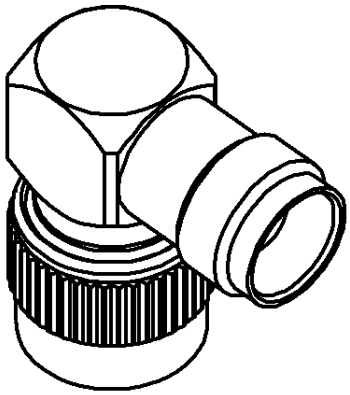

All dimensions are in mm.

COMPONENTS	MATERIALS	PLATINGS (µm)
BODY	**BRASS**	**NICKEL 2**
CENTER CONTACT	**BRASS**	**GOLD 0.5 OVER NICKEL 2**
OUTER CONTACT	-	-
INSULATOR	**PTFE**	
GASKET	**SILICONE RUBBER**	
OTHERS PARTS	**SILICONE RUBBER**	**NICKEL 2**
-	-	-
-	-	-

Issue : 0311 Q

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIALL®

Downloaded from Elcodis.com electronic components distributor

MALE-FEMALE RIGHT ANGLE ADAPTER

-

R143.770.000

Series : **TNC**

PACKAGING

Standard	Unit	Other
1	**-**	**Contact us**

SPECIFICATION

QAE 06-02A - -

ELECTRICAL CHARACTERISTICS

Impedance		**50**	Ω
Frequency		**0-4.5**	GHz
VSWR	**1.40** +	**0.000**	x F(GHz) Maxi
Insertion loss		**0.15**	√F(GHz) dB Maxi
RF leakage	- (	**57**	- F(GHz)) dB Maxi
Voltage rating		**500**	Veff Maxi
Dielectric withstanding voltage		**1500**	Veff mini
Insulation resistance		**5000**	MΩ mini

ENVIRONMENTAL

Operating temperature	**-65/+165**	° C
Hermetic seal	**NA**	Atm.cm3/s
Panel leakage	**NA**	

OTHERS CHARACTERISTICS

Assembly instruction

Others :
-

MECHANICAL CHARACTERISTICS

Center contact retention		
Axial force – Mating end	**18**	N mini
Axial force – Opposite end	**18**	N mini
Torque	**NA**	N.cm mini
Recommended torque		
Mating	**NA**	N.cm
Panel nut	**NA**	N.cm
Mating life	**500**	Cycles mini
Weight	**13.500**	g

Issue : 0311 Q

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIALL®

Downloaded from Elcodis.com electronic components distributor