


Now you're connected!

MRJ CONNECTOR SERIES

About Amphenol Commercial Products


Amphenol's Commercial Connector Products are used in a variety of end user applications including Networking, Telecom, Server & Computer, Storage & HDD, Consumer Electronics and Entertainment, Professional Audio, Industrial & Military/Aerospace




With matching RJ45



With Cable Header



With Terminal Block



With PCB for wiring



Description

The design of Amphenol Canada's rugged RJ45 is ideal for harsh environments where Ethernet/IP protocol is used.

These connectors are available in 8 or 10 contact versions, right angle and vertical mount PCB with the option of adding LED's, EMI filtering and transient voltage protection. Both termination styles are available with a matching RJ45 connector, cable header and terminal block mounted on a PCB.

Other features include damage protection against accidental mating with an RJ11 or an improperly terminated RJ plug.

Applications

MARKETS:

Industrial

Military

APPLICATIONS

Medical Equipment
ATM Machines
Lottery Terminals & Slot Machines
GPS
Positioning Equipment for Agriculture market
Military Vehicles
Military Radios
Test Equipment
Mobile Communication Systems
Military Computers

Now you're connected!

RELATED PRODUCTS

Amphenol manufactures a line of rugged USB, rugged D-sub and rugged bulkhead adapters, all meeting IP67. Contact your local Amphenol representative for details.



Electrical Properties

Current Rating: 1.5 Amperes
Contact Resistance: 30 milliohms maximum
Insulation Resistance: 500 Mega ohm minimum
DWV: 1000/1500 V AC @ sea level

Environmental Properties

RoHS Compliant
Operating Temperature: -40°C to +105°C
Thermal Shock: 25 cycles @ -40° C to +70° C
Humidity: Per EIC512-6 / EIA364-11A

Mechanical & Material Properties

Shell: Die-cast Zinc, Nickel Plated
Housing: High Temperature Thermoplastic UL94V0, Black
Front Housing: Clear Polycarbonate
Contacts: Phosphor Bronze, 50 u" (1.27 microns) Gold over Nickel
Physical Shock: Per EIA 364-27 Condition H (11 ms 30G)
Vibration: Per EIA 364-28 per Condition 5, Letter A

Available Documents

Drawing Number: P-MRJ-5XXX-XX
P-MRJ-6XXX-XX
P-MRJ-7XXX-XX

QTR9300376

Part Number

MRJ-5XXX-XX
MRJ-6XXX-XX
MRJ-7XXX-XX

Amphenol


Amphenol Canada
605 Milner Avenue
Toronto, Ontario, Canada M1B 5X6
Telephone: 416-291-4401
Fax: 416-754-8668

Copyright © Amphenol Corporation 2006 • All rights reserved

www.amphenolcanada.com or www.amphenolacp.com

Now you're connected!

MRJ CONNECTOR PRODUCT NUMBERING SYSTEM

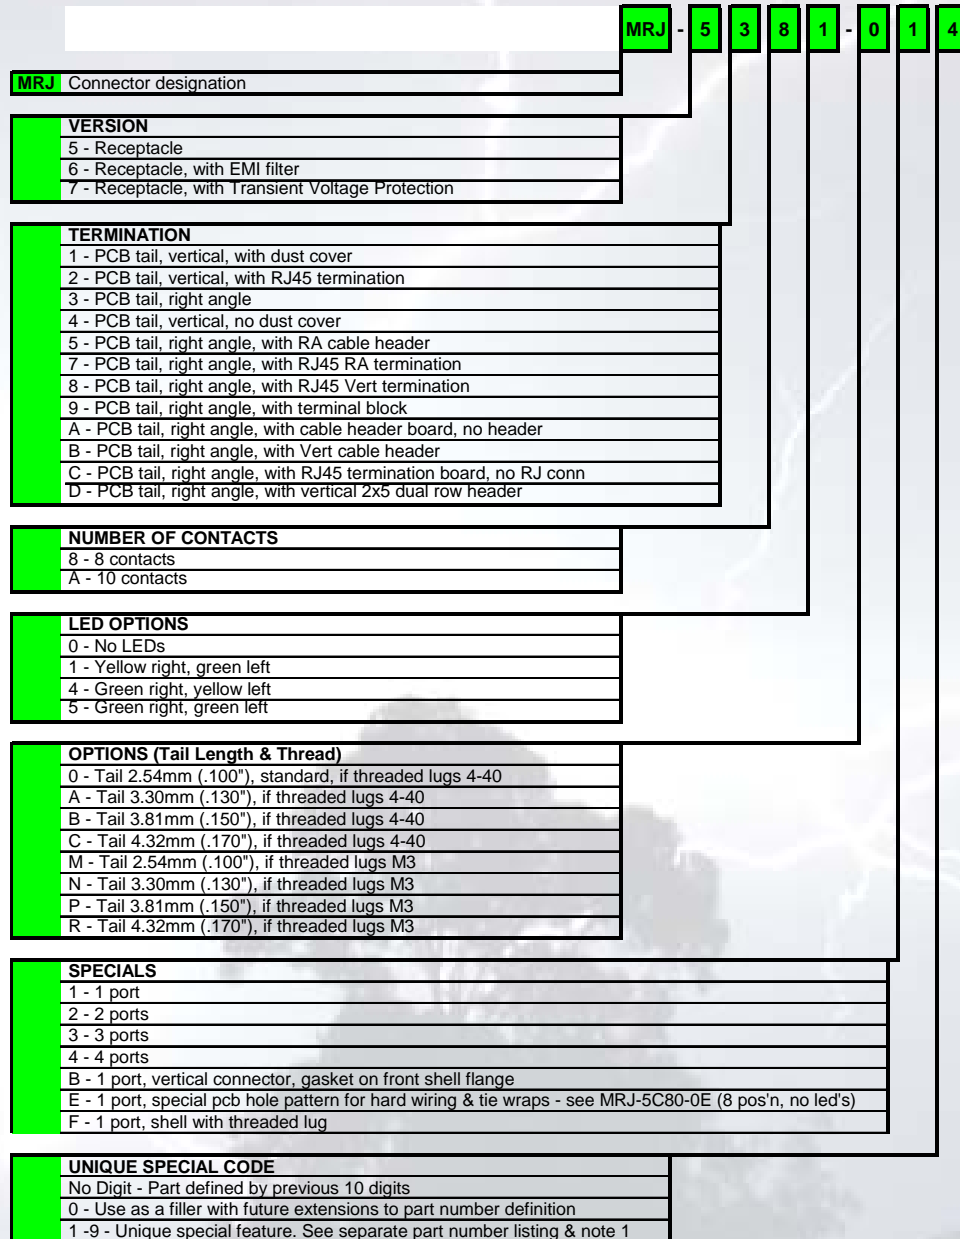

Notes

1) Unique special code relates to total part number. Code 4, for example, may have different meanings depending upon the product.

Amphenol

Amphenol Canada
605 Milner Avenue
Toronto, Ontario, Canada M1B 5X6
Telephone: 416-291-4401
Fax: 416-754-8668

Copyright © Amphenol Corporation 2006 • All rights reserved

www.amphenolcanada.com or www.amphenolacp.com