


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS		DOC. NO.	SPC-FD05	Effective:	12/21/98	Doc No.	880
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD
170	A	RELEASED	HYO	1/10/00	JC	2/2/00	DJC

- SPECIFICATIONS:**
1. INSULATOR: POLYAMIDE (NYLON)
 2. CONTACT: BRASS, NICKEL PLATED
 3. VOLTAGE: 1000V CATIII P2 (IEC61010-1)
 4. CURRENT: 25A MAX.
 5. RESISTANCE: < 5 milliohms
 6. TEMPERATURE: -20°C TO +80°C
 3. COLOR: RED

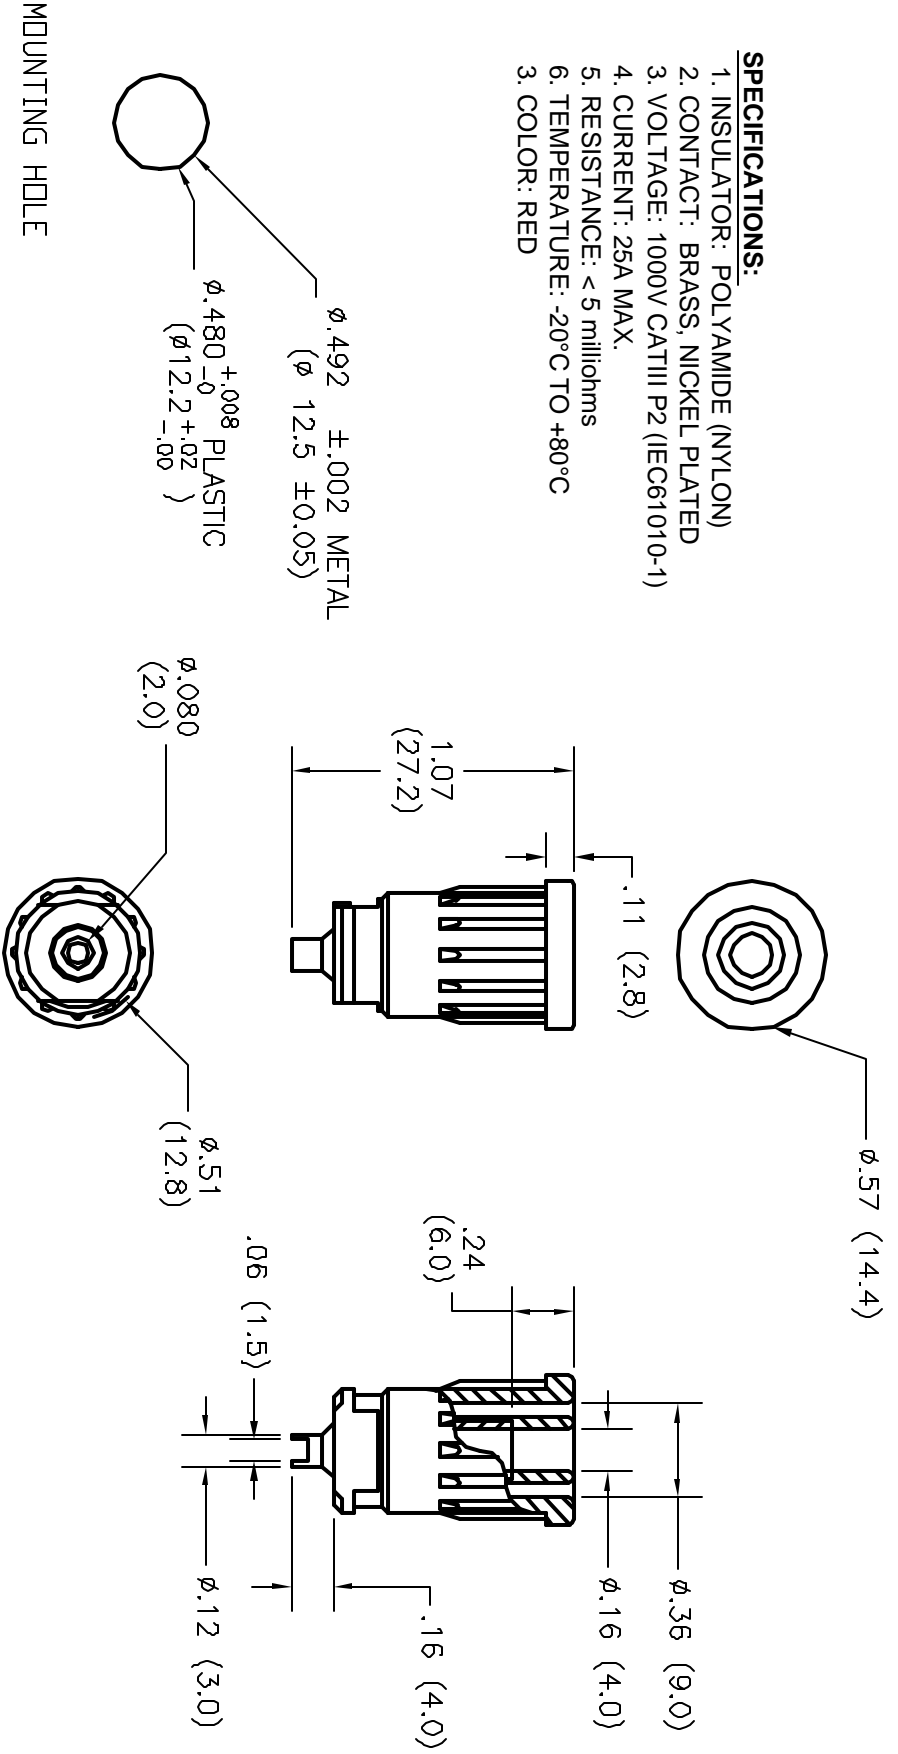

DISCLAIMER
 ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

SPC TECHNOLOGY

DRAWING TITLE: **PUSH-IN SAFETY SOCKET, .080 SOLDER FORK**

TOLERANCES UNLESS OTHERWISE SPECIFIED	DATE:
FRACTIONS: ± 1/32	HISHAM ODISH 1/10/00
DECIMALS	CHECKED BY:
XX ± .02	JOHN COLE 2/2/00
XXX ± .005	APPROVED BY:
	DANIEL CAREY 4/5/00

SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	SPC4868	50N079.DWG	A
SCALE:	NTS	U.O.M.: INCHES [mm]	SHEET: 1 OF 1