

# DATA SHEET

**Class 2, X7R 16/25/50/100/200  
and 500 V  
Noble Metal Electrode  
Surface mount ceramic  
multilayer capacitors**

Product specification

1999 Dec 06

Supersedes data of 7th June 1999

File under Advanced Ceramics and Modules, ACM2

# Surface mount ceramic multilayer capacitors

## Class 2, X7R 16/25/50/100/200 and 500 V Noble Metal Electrode

### FEATURES

- Seven standard sizes
- High capacitance per unit volume
- Supplied in tape on reel or in bulk case
- NiSn terminations (AgPd on request).

### APPLICATIONS

- Consumer electronics, for example:
  - Tuners
  - Television receivers
  - Video recorders
  - All types of cameras
- Telecommunications
- Automotive
- Data processing.

### DESCRIPTION

The capacitor consists of a rectangular block of ceramic dielectric in which a number of interleaved precious metal electrodes are contained. This structure gives rise to a high capacitance per unit volume.

The inner electrodes are connected to the two terminations, either by silver palladium (AgPd) alloy in the ratio 65 : 35, or silver dipped with a barrier layer of plated nickel and finally covered with a layer of plated tin (NiSn). A cross section of the structure is shown in Fig.1.

### QUICK REFERENCE DATA

DESCRIPTION	VALUE
Rated voltage $U_R$ (DC)	16 V, 25 V, 50 V, 100 V, 200 V and 500 V (IEC)
Capacitance range (E12 series); note 1:	
16 V	4.7 nF to 100 nF
25 V	3.3 nF to 220 nF
50 V; note 2	100 pF to 470 nF
100 V	180 pF to 330 nF
200 V	180 pF to 120 nF
500 V	470 pF to 15 nF
Tolerance on capacitance	$\pm 20\%$ ; $\pm 10\%$ ; $\pm 5\%$
Test voltage (DC) for 1 minute:	
16 V, 25 V, 50 V and 100 V	$2.5 \times U_R$
200 V	$3 \times U_R$
500 V	$2 \times U_R$
Sectional specifications	IEC 60384-10, second edition 1989-04; also based on CECC 32 100
Detailed specification	based on CECC 32 101-801
Climatic category (IEC 60068)	55/125/56

### Notes

1. Non E12 values are available on request.
2. Also applicable for applications up to 63 V.


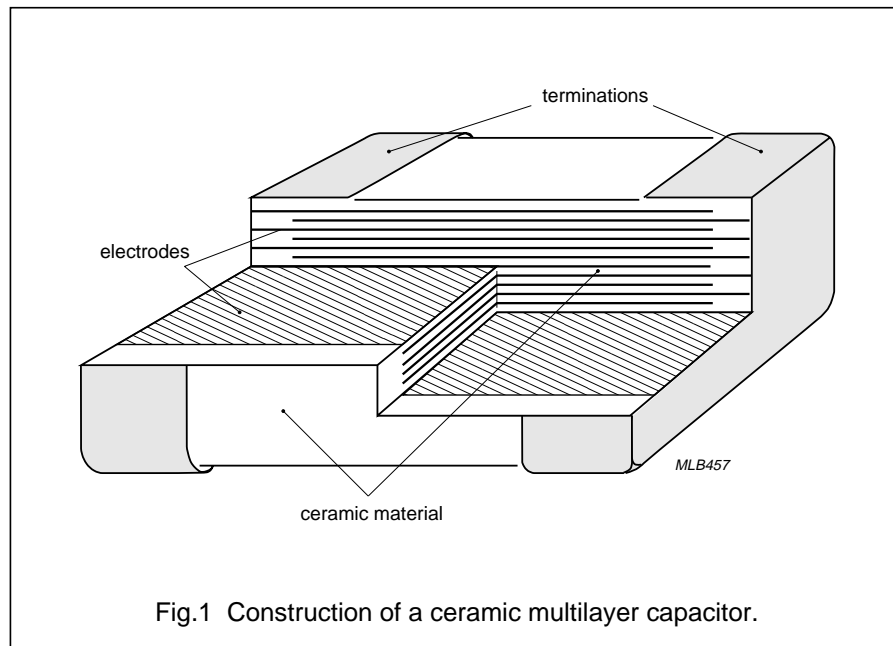


Fig.1 Construction of a ceramic multilayer capacitor.

Surface mount ceramic  
multilayer capacitors

Class 2, X7R 16/25/50/100/200 and 500 V  
Noble Metal Electrode

**MECHANICAL DATA**

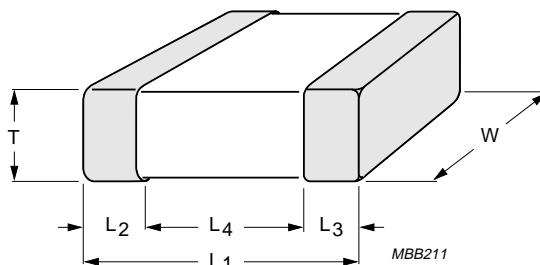

For dimensions see Table 1.

Fig.2 Component outline.

**Physical dimensions**

**Table 1** Capacitor dimensions

CASE SIZE	L <sub>1</sub>	W	T		L <sub>2</sub> and L <sub>3</sub>		L <sub>4</sub> MIN.
			MIN.	MAX.	MIN.	MAX.	
<b>Dimensions in millimetres</b>							
0402	1.0 ±0.05	0.5 ±0.05	0.45	0.55	0.20	0.30	0.40
0603	1.6 ±0.10	0.8 ±0.07	0.73	0.87	0.25	0.65	0.40
0805	2.0 ±0.10	1.25 ±0.10	0.50	1.35	0.25	0.75	0.55
1206	3.2 ±0.15	1.6 ±0.15	0.50	1.75	0.25	0.75	1.40
1210	3.2 ±0.20	2.5 ±0.20	0.50	1.80	0.25	0.75	1.40
1812	4.5 ±0.20	3.2 ±0.20	0.50	1.80	0.25	0.75	2.20
2220	5.7 ±0.20	5.0 ±0.20	0.50	1.80	0.25	0.75	2.90
<b>Dimensions in inches</b>							
0402	0.040 ±0.002	0.020 ±0.002	0.018	0.022	0.008	0.012	0.016
0603	0.063 ±0.004	0.032 ±0.003	0.029	0.035	0.010	0.026	0.016
0805	0.079 ±0.004	0.049 ±0.004	0.020	0.053	0.010	0.030	0.022
1206	0.126 ±0.006	0.063 ±0.006	0.020	0.069	0.010	0.030	0.056
1210	0.126 ±0.008	0.098 ±0.008	0.020	0.072	0.010	0.030	0.056
1812	0.177 ±0.008	0.126 ±0.008	0.020	0.072	0.010	0.030	0.088
2220	0.224 ±0.008	0.197 ±0.008	0.020	0.072	0.010	0.030	0.114

# Surface mount ceramic multilayer capacitors

# Class 2, X7R 16 V and 25 V Noble Metal Electrode

## SELECTION CHART FOR 16 V AND 25 V

C (nF)	LAST TWO DIGITS OF 12NC	16 V				25 V				
		0402	0603	0805	1206	0402	0603	0805	1206	1210
3.3	29									
3.9	31					0.5 ±0.05				
4.7	32									
5.6	33									
6.8	34									
8.2	35									
10	36	0.5 ±0.05								
12	37									
15	38						0.8 ±0.07			
18	39							0.6 ±0.1		
22	41									
27	42									
33	43									
39	44									
47	45		0.8 ±0.07							
56	46			0.6 ±0.1				0.85 ±0.1		
68	47									
82	48									
100	49									
120	51									
150	52			0.85 ±0.1					0.85 ±0.1	
180	53									
220	54									
270	55				0.85 ±0.1				1.15 ±0.1	0.5 to 1.0
330	56									
390	57			1.25 ±0.1						
470	58									0.9 to 1.3
560	59									
680	61				1.15 ±0.1					
820	62									
1000	63									

Values in shaded cells indicate thickness classification.

## Thickness classification and packaging quantities

THICKNESS CLASSIFICATION (mm)	8 mm TAPE WIDTH AMOUNT PER REEL				AMOUNT PER BULK CASE		
	Ø180 mm; 7"		Ø330 mm; 13"		0402	0603	0805
	PAPER	BLISTER	PAPER	BLISTER			
0.5 ±0.05	10000	–	50000	–	50000	–	–
0.6 ±0.1	4000	–	20000	–	–	–	10000
0.85 ±0.1	4000	–	15000	–	–	–	8000
0.5 to 1.0	–	4000	–	10000	–	–	–
0.8 ±0.07	4000	–	15000	–	–	15000	–
0.9 to 1.3	–	3000	–	10000	–	–	–
1.15 ±0.1	–	3000	–	10000	–	–	–
1.25 ±0.1	–	3000	–	10000	–	–	5000

# Surface mount ceramic multilayer capacitors

# Class 2, X7R 16 V and 25 V Noble Metal Electrode

## ORDERING INFORMATION FOR 16 V AND 25 V


Components may be ordered by using either a simple 15-digit clear text code or Philips unique 12NC.

### Clear text code

Example: 08052R104K8BB00

SIZE CODE	TEMP. CHAR.	CAPACITANCE	TOL.	VOLTAGE	TERMINATION	PACKAGING	MARKING	SERIES
0402	2R = X7R	104 = 100000 pF; the third digit signifies the multiplying factor: 2 = × 100 3 = × 1000 4 = × 10000 5 = × 100000	J = ±5% K = ±10% M = ±20%	7 = 16 V 8 = 25 V	B = Ni-barrier	2 = 180 mm; 7" paper 3 = 330 mm; 13" paper B = 180 mm; 7" blister F = 330 mm; 13" blister P = bulk case	0 = no marking 2 = 2-character marking in North America only	0 = conv. ceramic

### Ordering code 12NC

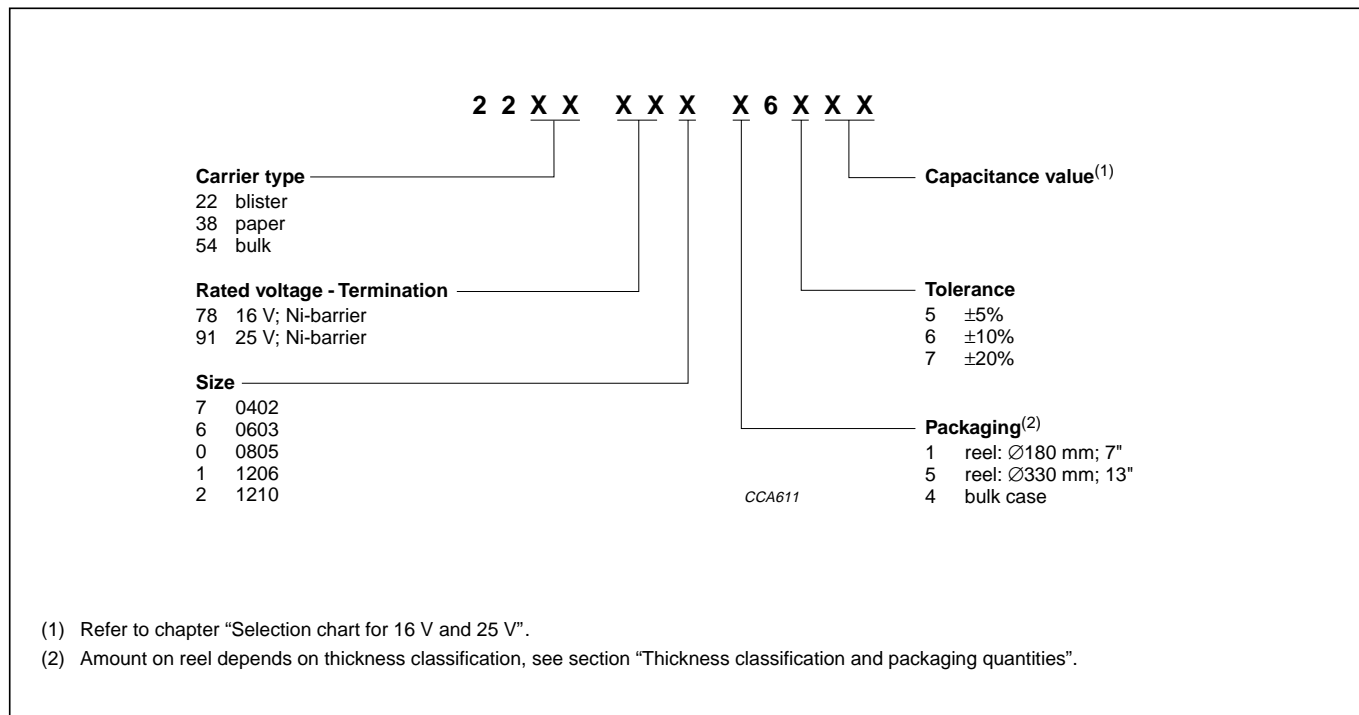

Surface mount ceramic  
multilayer capacitors

Class 2, X7R 50 V  
Noble Metal Electrode

SELECTION CHART FOR 50 V

C (pF)	LAST TWO DIGITS OF 12NC	50 V						
		0402	0603	0805	1206	1210	1812	2220
100	01							
120	02							
150	03							
180	04							
220	05							
270	06							
330	07							
390	08							
470	09							
560	11	0.5 ±0.05						
680	12							
820	13							
1000	14							
1200	15		0.8 ±0.07					
1500	16							
1800	17			0.6 ±0.1				
2200	18							
2700	19							
3300	21							
3900	22							
4700	23							
5600	24							
6800	25				0.85 ±0.1			
8200	26							
10000	27							
12000	28							
15000	29							
18000	31							
22000	32							
27000	33							
33000	34					0.5 to 1.0		
39000	35			0.85 ±0.1				
47000	36							
56000	37							
68000	38							
82000	39			1.25 ±0.1				
100000	41							
120000	42							
150000	43							
180000	44				1.15 ±0.1	0.9 to 1.3	0.5 to 1.0	
220000	45							
270000	46							
330000	47							
390000	48							0.5 to 1.0
470000	49						0.9 to 1.3	
560000	51							
680000	52							
820000	53							
1000000	54							0.9 to 1.3

Values in shaded cells indicate thickness classification.

# Surface mount ceramic multilayer capacitors

# Class 2, X7R 50 V Noble Metal Electrode

## Thickness classification and packaging quantities

THICKNESS CLASSIFICATION (mm)	8 mm TAPE WIDTH AMOUNT PER REEL				12 mm TAPE WIDTH AMOUNT PER REEL		AMOUNT PER BULK CASE		
	Ø180 mm; 7"		Ø330 mm; 13"		Ø180 mm; 7" BLISTER		0402	0603	0805
	PAPER	BLISTER	PAPER	BLISTER	1812	2220			
0.5 ±0.05	10000	–	50000	–	–	–	50000	–	–
0.6 ±0.1	4000	–	20000	–	–	–	–	–	10000
0.85 ±0.1	4000	–	15000	–	–	–	–	–	8000
0.5 to 1.0	–	4000	–	10000	2000	1500	–	–	–
0.8 ±0.07	4000	–	15000	–	–	–	–	15000	–
0.9 to 1.3	–	3000	–	10000	1500	1500	–	–	–
1.15 ±0.1	–	3000	–	10000	–	–	–	–	–
1.25 ±0.1	–	3000	–	10000	–	–	–	–	5000

## ORDERING INFORMATION FOR 50 V

Components may be ordered by using either a simple 15-digit clear text code or Philips unique 12NC.

### Clear text code

EXAMPLE: 08052R104K9BB00

SIZE CODE	TEMP. CHAR.	CAPACITANCE	TOL.	VOLTAGE	TERMINATION	PACKAGING	MARKING	SERIES
0402 0603 0805 1206 1210 1812 2220	2R = X7R	104 = 100000 pF; the third digit signifies the multiplying factor: 1 = × 10 2 = × 100 3 = × 1000 4 = × 10000 5 = × 100000	J = ±5% K = ±10% M = ±20%	9 = 50 V	B = Ni-barrier A = AgPd (2220 only)	2 = 180 mm; 7" paper 3 = 330 mm; 13" paper B = 180 mm; 7" blister F = 330 mm; 13" blister P = bulk case	0 = no marking 2 = 2-character marking in North America only	0 = conv. ceramic

## Ordering code 12NC

2 2 X X X X X X 6 X X X

**Carrier type**

- 22 blister
- 38 paper
- 54 bulk

**Rated voltage - Termination**

- 58 50 V; Ni-barrier
- 59 50 V; AgPd (2220 only)

**Size**

- 7 0402
- 6 0603
- 0 0805
- 1 1206
- 2 1210
- 4 1812
- 5 2220

**Capacitance value<sup>(1)</sup>**

**Tolerance**

- 5 ±5%
- 6 ±10%
- 7 ±20%

**Packaging<sup>(2)</sup>**

- 1 reel: Ø180 mm; 7"
- 5 reel: Ø330 mm; 13"
- 4 bulk case

CCA612

(1) Refer to chapter "Selection chart for 50 V".

(2) Amount on reel depends on thickness classification, see section "Thickness classification and packaging quantities".

Surface mount ceramic  
multilayer capacitorsClass 2, X7R 100 V, 200 V and 500 V  
Noble Metal Electrode

## SELECTION CHART FOR 100 V, 200 V AND 500 V

C (pF)	LAST TWO DIGITS OF 12NC	100 V				200 V				500 V		
		0805	1206	1210	1812	0805	1206	1210	1812	1206	1210	1812
180	13											
220	14											
270	15											
330	16											
390	17											
470	18											
560	19											
680	21											
820	22											
1000	23					0.85 ±0.1				1.15 ±0.1		
1200	24											
1500	25	0.6 ±0.1										
1800	26											
2200	27											
2700	28											
3300	29		0.85 ±0.1				0.85 ±0.1					
3900	31										0.9 to 1.3	
4700	32											
5600	33											
6800	34					1.25 ±0.1					1.2 to 1.75	
8200	35											
10000	36											
12000	37											0.9 to 1.3
15000	38											
18000	39	0.85 ±0.1										
22000	41						1.15 ±0.1					
27000	42							0.8 to 1.0				
33000	43											
39000	44											
47000	45							0.9 to 1.3				
56000	46								0.5 to 1.0			
68000	47			0.5 to 1.0								
82000	48		1.15 ±0.1									
100000	49								0.9 to 1.3			
120000	51			0.9 to 1.3								
150000	52				0.5 to 1.0							
180000	53											
220000	54											
270000	55				0.9 to 1.3							
330000	56											

Values in shaded cells indicate thickness classification.



# Surface mount ceramic multilayer capacitors

# Class 2, X7R 100 V, 200 V and 500 V Noble Metal Electrode

## Thickness classification and packaging quantities

THICKNESS CLASSIFICATION (mm)	8 mm TAPE WIDTH AMOUNT PER REEL				12 mm TAPE WIDTH AMOUNT PER REEL	AMOUNT PER BULK CASE
	Ø180 mm; 7"		Ø330 mm; 13"		Ø180 mm; 7" BLISTER	
	PAPER	BLISTER	PAPER	BLISTER	1812	
0.6 ±0.1	4000	–	20000	–	–	10000
0.85 ±0.1	4000	–	15000	–	–	8000
0.8 to 1.0	–	4000	–	10000	–	–
0.5 to 1.0	–	4000	–	10000	2000	–
0.9 to 1.3	–	3000	–	10000	1500	–
1.15 ±0.1	–	3000	–	10000	–	–
1.25 ±0.1	–	3000	–	10000	–	5000
1.2 to 1.75	–	2500	–	10000	–	–

## ORDERING INFORMATION FOR 100 V, 200 V AND 500 V

Components may be ordered by using either a simple 15-digit clear text code or Philips unique 12NC.

### Clear text code

Example: 18122R104KBBB00

SIZE CODE	TEMP. CHAR.	CAPACITANCE	TOL.	VOLTAGE	TERMINATION	PACKAGING	MARKING	SERIES
0805 1206 1210 1812	2R = X7R	104 = 100000 pF; the third digit signifies the multiplying factor: 1 = × 10 2 = × 100 3 = × 1000 4 = × 10000	J = ±5% K = ±10% M = ±20%	0 = 100 V B = 200 V D = 500 V	B = Ni-barrier	2 = 180 mm; 7" paper 3 = 330 mm; 13" paper B = 180 mm; 7" blister F = 330 mm; 13" blister P = bulk case	0 = no marking 2 = 2-character marking in North America only	0 = conv. ceramic

## Ordering code 12NC

2 2 X X X X X X 6 X X X

**Carrier type**

- 22 blister
- 38 paper
- 54 bulk

**Rated voltage - Termination**

- 60 100 V; Ni-barrier
- 93 200 V; Ni-barrier
- 97 500 V; Ni-barrier

**Size**

- 0 0805
- 1 1206
- 2 1210
- 4 1812

**Capacitance value<sup>(1)</sup>**

**Tolerance**

- 5 ±5%
- 6 ±10%
- 7 ±20%

**Packaging<sup>(2)</sup>**

- 1 reel: Ø180 mm; 7"
- 5 reel: Ø330 mm; 13"
- 4 bulk case

CCA613

(1) Refer to chapter "Selection chart for 100 V, 200 V and 500 V".

(2) Amount on reel depends on thickness classification, see section "Thickness classification and packaging quantities".

Surface mount ceramic multilayer capacitors

Class 2, X7R 16/25/50/100/200 and 500 V Noble Metal Electrode

**ELECTRICAL CHARACTERISTICS**



**Class 2 capacitors; X7R dielectric; AgPd and NiSn terminations**

Unless otherwise stated all electrical values apply at an ambient temperature of  $20 \pm 1$  °C, an atmospheric pressure of 86 to 106 kPa, and a relative humidity of 63 to 67%.

DESCRIPTION	VALUE
Capacitance range (E12 series); note 1	100 pF to 100 nF
Tolerance on capacitance after 1000 hours	$\pm 20\%$ ; $\pm 10\%$ ; $\pm 5\%$ ; note 2
Tan $\delta$ ; note 1	$\leq 2.5\%$ ; 16 V range $\leq 3.5\%$
Insulation resistance after 1 minute at $U_R$ (DC): C $\leq 10$ nF C $> 10$ nF	$R_{ins} > 100$ G $\Omega$ $R_{ins} \times C > 1000$ seconds
Maximum capacitance change as a function of temperature (for typical values see Fig.3)	$\pm 15\%$
Ageing	typical 1% per time decade




**Notes**

1. Measured at 1 V, 1 kHz, using a four-gauge method.
2. Tolerance of  $\pm 1\%$  available on request.

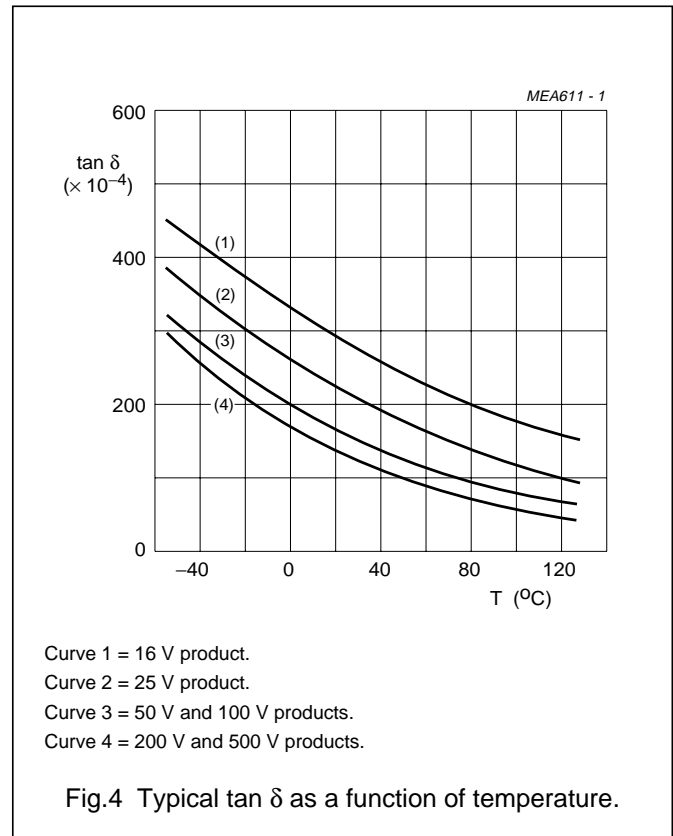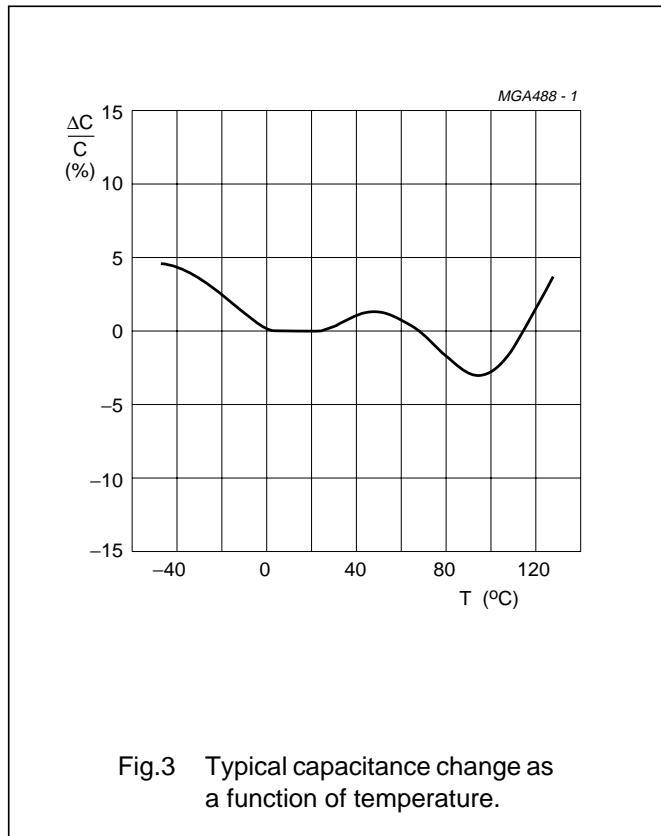

Surface mount ceramic multilayer capacitors

Class 2, X7R 16/25/50/100/200 and 500 V Noble Metal Electrode

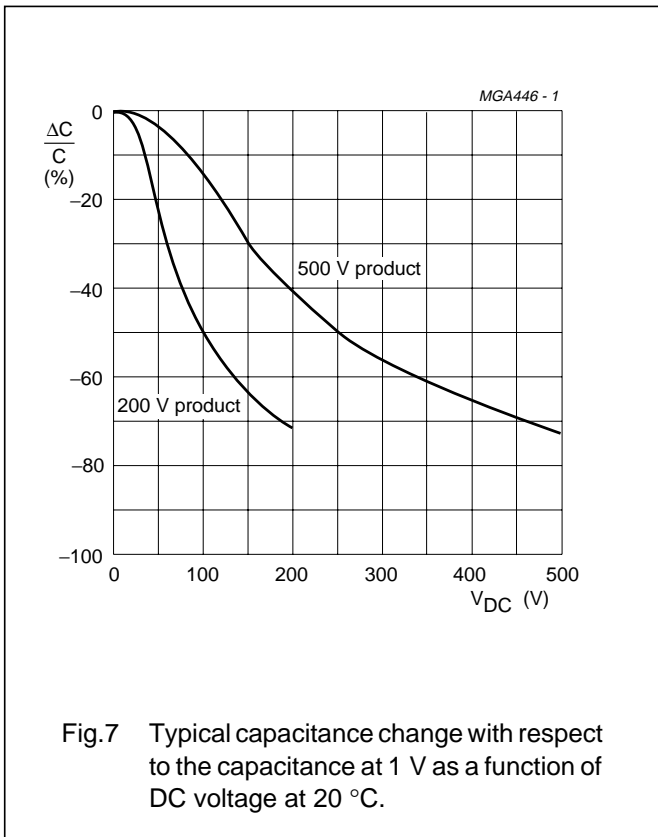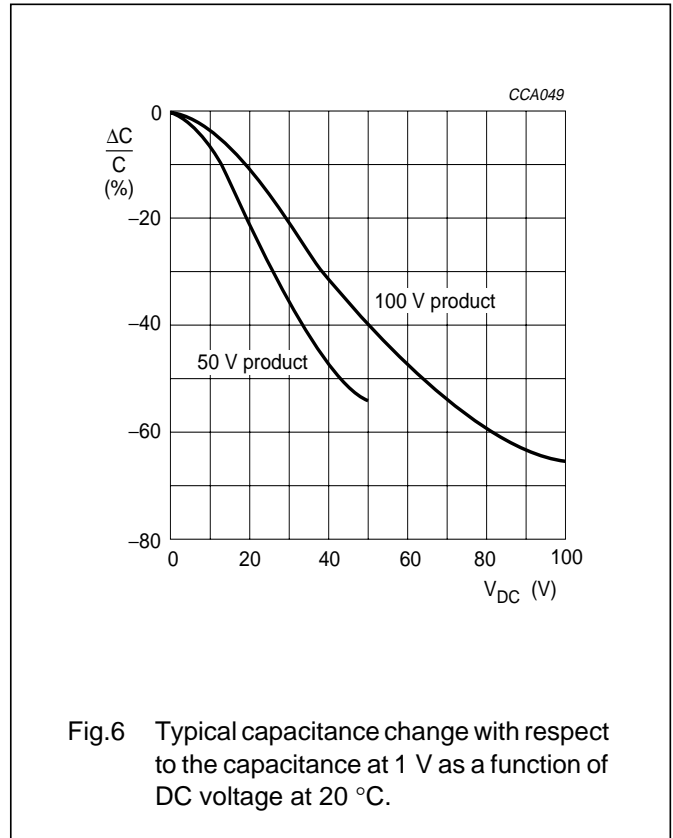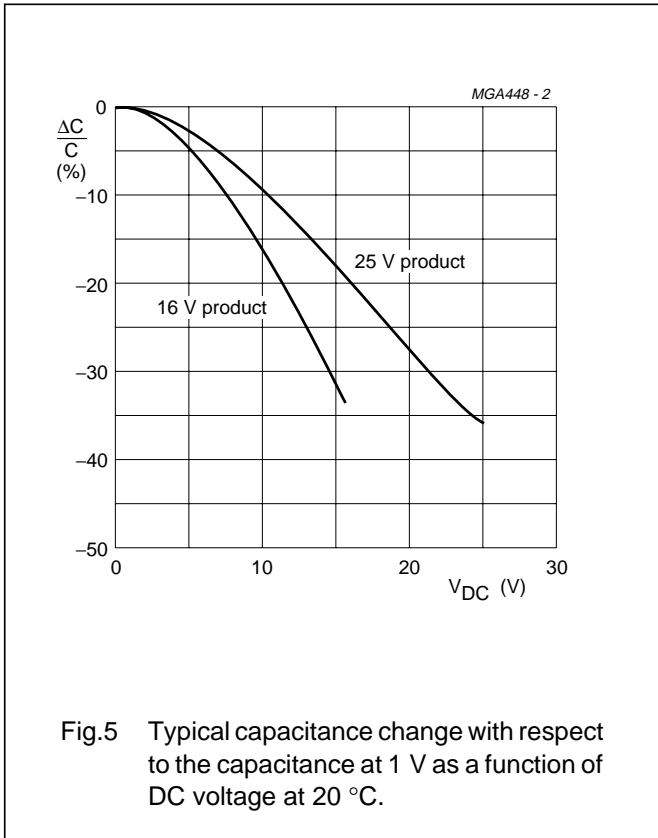

Surface mount ceramic  
multilayer capacitors

Class 2, X7R 16/25/50/100/200 and 500 V  
Noble Metal Electrode

## DEFINITIONS

<b>Data sheet status</b>	
Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.
<b>Application information</b>	
Where application information is given, it is advisory and does not form part of the specification.	

## LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.

---

Surface mount ceramic  
multilayer capacitors

Class 2, X7R 16/25/50/100/200 and 500 V  
Noble Metal Electrode

---

**NOTES**

---

Surface mount ceramic  
multilayer capacitors

Class 2, X7R 16/25/50/100/200 and 500 V  
Noble Metal Electrode

---

**NOTES**

---

Surface mount ceramic  
multilayer capacitors

Class 2, X7R 16/25/50/100/200 and 500 V  
Noble Metal Electrode

---

**NOTES**

# Philips Components – a worldwide company

**Australia:** Philips Components Pty Ltd., HOMEBUSH,  
Tel. +61 2 9704 8141, Fax. +61 2 9704 8139

**Austria:** Österreichische Philips Industrie GmbH, WIEN,  
Tel. +43 1 60 101 12 41, Fax. +43 1 60 101 12 11

**Belarus:** Philips Office Belarus, MINSK,  
Tel. +375 172 200 924/733, Fax. +375 172 200 773

**Benelux:** Philips Components B.V., EINDHOVEN, NL,  
Tel. +31 40 25 90 772, Fax. +31 40 25 90 777

**Brazil:** Philips Components, SÃO PAULO,  
Tel. +55 11 821 2333, Fax. +55 11 829 1849

**Canada:** Philips Electronics Ltd., SCARBOROUGH,  
Tel. +1 416 292 5161, Fax. +1 416 754 6248

**China:** Philips Company, SHANGHAI,  
Tel. +86 21 6354 1088, Fax. +86 21 6354 1060

**Denmark:** Philips Components A/S, COPENHAGEN V,  
Tel. +45 3329 3333, Fax. +45 3329 3905

**Finland:** Philips Components, ESPOO,  
Tel. +358 9 615 800, Fax. +358 9 615 80510

**France:** Philips Composants, SURESNES,  
Tel. +33 1 4099 6161, Fax. +33 1 4099 6493

**Germany:** Philips Components GmbH, HAMBURG,  
Tel. +49 40 2489-0, Fax. +49 40 2489 1400

**Hong Kong:** Philips Hong Kong, KOWLOON,  
Tel. +852 2784 3000, Fax. +852 2784 3003

**India:** Philips India Ltd., MUMBAI,  
Tel. +91 22 4930 311, Fax. +91 22 4930 966/4950 304

**Indonesia:** P.T. Philips Development Corp., JAKARTA,  
Tel. +62 21 794 0040, Fax. +62 21 794 0080

**Ireland:** Philips Electronics (Ireland) Ltd., DUBLIN,  
Tel. +353 1 7640 203, Fax. +353 1 7640 210

**Israel:** Rapac Electronics Ltd., TEL AVIV,  
Tel. +972 3 6450 444, Fax. +972 3 6491 007

**Italy:** Philips Components S.r.l., MILANO,  
Tel. +39 2 6752 2531, Fax. +39 2 6752 2557

**Japan:** Philips Japan Ltd., TOKYO,  
Tel. +81 3 3740 5135, Fax. +81 3 3740 5035

**Korea (Republic of):** Philips Electronics (Korea) Ltd., SEOUL,  
Tel. +82 2 709 1472, Fax. +82 2 709 1480

**Malaysia:** Philips Malaysia SDN Berhad,  
Components Division, PULAU PINANG,  
Tel. +60 3 750 5213, Fax. +60 3 757 4880

**Mexico:** Philips Components, EL PASO, U.S.A.,  
Tel. +52 915 772 4020, Fax. +52 915 772 4332

**New Zealand:** Philips New Zealand Ltd., AUCKLAND,  
Tel. +64 9 815 4000, Fax. +64 9 849 7811

**Norway:** Philips Components, STOCKHOLM,  
Tel. +46 8 5985 2000, Fax. +46 8 5985 2745

**Pakistan:** Philips Electrical Industries of Pakistan Ltd., KARACHI,  
Tel. +92 21 587 4641-49, Fax. +92 21 577 035/+92 21 587 4546

**Philippines:** Philips Semiconductors Philippines Inc.,  
METRO MANILA, Tel. +63 2 816 6345, Fax. +63 2 817 3474

**Poland:** Philips Poland Sp. z.o.o., WARSZAWA,  
Tel. +48 22 5710 000, Fax. +48 22 5710 001

**Portugal:** Philips Portuguesa S.A.,  
Philips Components: LINDA-A-VELHA,  
Tel. +351 1 416 3160/416 3333, Fax. +351 1 416 3174/416 3366

**Russia:** Philips Russia, MOSCOW,  
Tel. +7 95 755 6918, Fax. +7 95 755 6919

**Singapore:** Philips Singapore Pte Ltd., SINGAPORE,  
Tel. +65 350 2000, Fax. +65 355 1758

**South Africa:** S.A. Philips Pty Ltd., JOHANNESBURG,  
Tel. +27 11 470 5911, Fax. +27 11 470 5494

**Spain:** Philips Components, BARCELONA,  
Tel. +34 93 301 63 12, Fax. +34 93 301 42 43

**Sweden:** Philips Components, STOCKHOLM,  
Tel. +46 8 5985 2000, Fax. +46 8 5985 2745

**Switzerland:** Philips Components AG, ZÜRICH,  
Tel. +41 1 488 22 11, Fax. +41 1 481 7730

**Taiwan:** Philips Taiwan Ltd., TAIPEI,  
Tel. +886 2 2134 2900, Fax. +886 2 2134 2929

**Turkey:** Türk Philips Ticaret A.S., UMRABIYE/ISTANBUL,  
Tel. +90 216 522 18 00, Fax. +90 216 522 18 14

**United Kingdom:** Philips Components Ltd., DORKING,  
Tel. +44 1306 512 000, Fax. +44 1306 512 345

## United States:

- Philips Components, SAN JOSE, CA,  
Tel. +1 408 570 5600, Fax. +1 408 570 5700
- Philips Display Components, ANN ARBOR, MI,  
Tel. +1 734 996 9400, Fax. +1 734 761 2776
- Philips Discrete Ceramics, CHARLOTTE, NC,  
Tel. +1 915 860 3267, Fax. +1 915 860 3270
- Philips Ferrite Ceramics, ROSWELL, GA,  
Tel. +1 877 433 77483, Fax. +1 770 992 0725

**Yugoslavia (Federal Republic of):** Philips Components, BELGRADE,  
Tel. +381 11 625 344 / +381 11 3341 299, Fax. +381 11 635 777

## Internet:

- Discrete and Ferrite Ceramics: [www.acm.components.philips.com](http://www.acm.components.philips.com)
- Display Components: [www.philipsdisplay.com](http://www.philipsdisplay.com)

## For all other countries apply to:

Philips Components, Building BAE-1, P.O. Box 218, 5600 MD EINDHOVEN,  
The Netherlands, Fax. +31 40 27 22 599

COD33

© Philips Electronics N.V. 1999

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.  
The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.  
No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Printed in The Netherlands

041010/500/03/pp16  
Document order number:

Date of release: 1999 Dec 06  
9397 378 57011

*Let's make things better.*