





Messrs.					
Product Specification	Model:	NMTG-S12864EFYHSGY-10B	Rev. No.	Issued Date.	Page.
			A	Jun. 20, 08	1 / 20

LIQUID CRYSTAL DISPLAY MODULE
MODEL: NMTG-S12864EFYHSGY-10B
Customer's No.:

Acceptance

Microtips Technology Inc.
 12F. No.31 Lane 169, Kang Ning St.,
 His-Chih, Taipei Hsien, Taiwan, R.O.C.
 FAX: 886-2-26958625

Approved and Checked by

Approved by	Checked by		Made by
			



Microtips Technology Inc.

Messrs.					
Product Specification	Model:	NMTG-S12864EFYHSGY-10B	Rev. No.	Issued Date.	Page.
			A	Jun. 20, 08	3 / 20

Contents

1. General Specifications	4
2. Electrical Specifications	5
2.1 Absolute Maximum Ratings	5
2.2 DC Characteristics	5
2.3 AC Characteristics	6
2.4 Power Supply ON/OFF Sequence	7
2.5 Lighting Specifications	8
3. Optical Specifications	9
3.1 LCD Driving Voltage Recommended	9
3.2 Optical Characteristics	9
3.3 Definition of Viewing Angle and Optimum Viewing Area	10
3.4 Definition of Viewing Angle θ_r and θ_b	10
3.5 Definition of Contrast C, C= <i>Brightness of selected dot</i>	10
4. I/O Terminal	11
4.1 Pin Assignment	11
4.2 Example of Power Supply	11
4.3 Block Diagram	12
5. Reliability Test	13
5.1 Test Item	13
5.2 Judgment Standard	14
6. Appearance Standards	15
6.1 Inspection Conditions	15
6.2 Definition of Applicable Zones	15
6.3 Standards	16
7. Handling and Precautions	18
8. Warranty	19
9. Dimensional Outlines	19



Microtips Technology Inc.

Messrs.					
Product Specification	Model:	NMTG-S12864EFYHSGY-10B	Rev. No.	Issued Date.	Page.
			A	Jun. 20, 08	4 / 20

The Microtips Customized LCD module, model: NMTG-S12864EFYHSGY-10B is compliant with RoHS

1. General Specifications

Operating Temperature	:	Min. -20°C ~ Max. 70°C
Storage Temperature	:	Min. -30°C ~ Max. 80°C
Dot Pixels	:	128 (W) x 64 (H) dots
Dot Size	:	0.42 (W) x 0.58 (H) mm
Dot Pitch	:	0.44 (W) x 0.60 (H) mm
Viewing Area	:	62.0 (W) x 44.0 (H) mm
Outline Dimensions	:	78.0(W) x 70.0 (H) x 12.4 max. (D) mm
Weight	:	N/A
LCD Type	:	STN/ Yellow Green/ Transflective
Viewing Direction	:	6:00
Backlight	:	Edge Type LED B/L (Yellow-Green)
LSI	:	SAP1024B
Drawings	:	As attached drawings



Microtips Technology Inc.

Messrs.					
Product Specification	Model:	NMTG-S12864EFYHSGY-10B	Rev. No.	Issued Date.	Page.
			A	Jun. 20, 08	5 / 20

2. Electrical Specifications

2.1 Absolute Maximum Ratings

$V_{SS} = 0V$

Parameter	Symbol	Conditions	Min.	Max.	Units
Supply Voltage (Logic)	$V_{DD} - V_{SS}$	--	- 0.3	7.0	V
Supply Voltage (LCD Drive)	$V_{DD} - V_{EE}$	--	0	28.0	V
Input Voltage	V_I	--	- 0.3	$V_{DD} + 0.3$	V

2.2 DC Characteristics

$T_a = 25^{\circ}C, V_{SS} = 0V$

Parameter		Symbol	Conditions	Min.	Typ.	Max.	Units
Supply Voltage (Logic)	Recommended	$V_{DD} - V_{SS}$	--	4.5	5.0	5.5	V
	Allowable			--	--	--	V
Supply Voltage (LCD Drive)		$V_{DD} - V_O$	Shown in 3.1				V
High Level (Input Voltage)		V_{IH}	Input pins	$V_{DD} - 2.2$	--	V_{DD}	V
Low Level (Input Voltage)		V_{IL}	Input pins	0	--	0.8	V
High Level (Output Voltage)		V_{OH}	$I_{OH} = -3.0mA$	$V_{DD} - 0.3$	--	V_{DD}	V
Low Level (Output Voltage)		V_{OL}	$I_{OH} = 3.0mA$	0	--	0.3	V
Supply Current		I_{DD}	$V_{DD} - V_{SS}$	--	8.2	13.0	mA
		I_{EE}	$V_{DD} - V_{EE}$	--	2.8	5.0	mA




Microtips Technology Inc.

Messrs.					
Product Specification	Model:	NMTG-S12864EFYHSGY-10B	Rev. No.	Issued Date.	Page.
			A	Jun. 20, 08	6 / 20

2.3 AC Characteristics

Ta = -20~70°C, V_{DD} = 5.0V ± 10%, unless state otherwise

Parameter	Symbol	Condition	Rating		Unit	Signal
			Min.	Max.		
C/D Setup Time	t _{CDS}	--	100	--	ns	A0, CS
C/D Hold Time	t _{CDH}	--	10	--	ns	
CE, RD, WR Pulse Width	t _{CE} , t _{RD} , t _{WR}	--	80	--	ns	CE, WR, RD
Data Setup Time	t _{DS}	--	40	--	ns	DB0 to DB7
Data Hold Time	t _{DH}	--	10	--	ns	
Access Time	t _{ACC}	--	--	150	ns	
Output Hold Time	t _{OH}	--	10	50	ns	

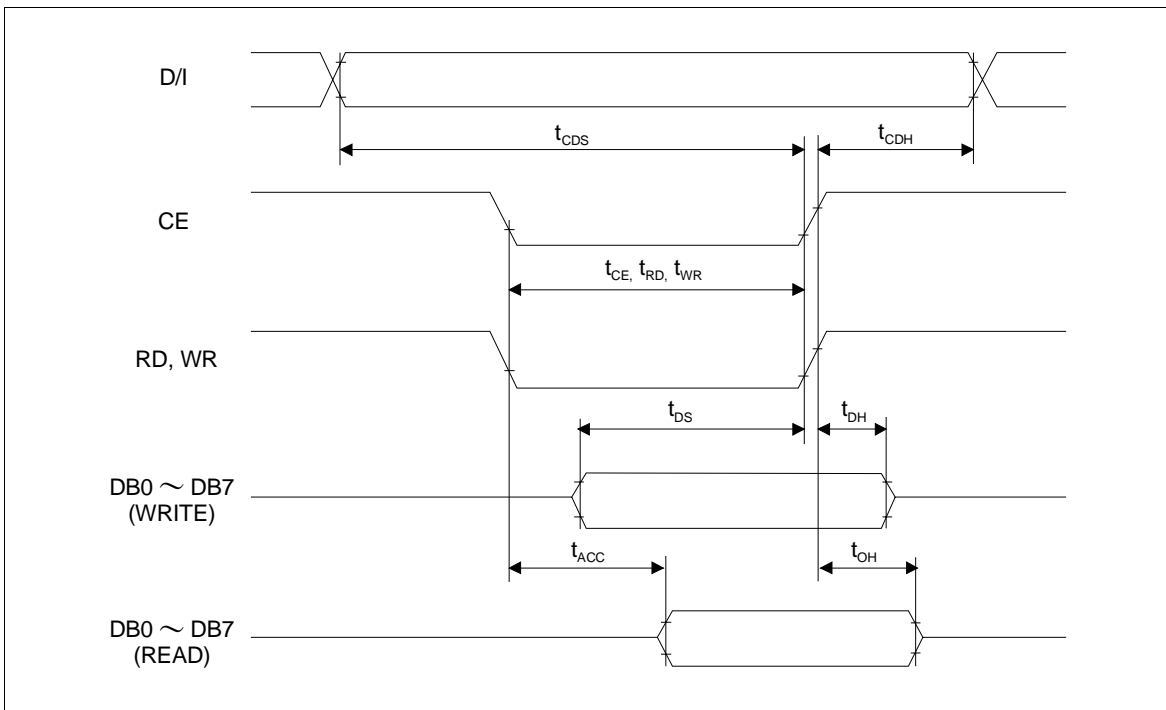


Microtips Technology Inc.


Messrs.			
Product Specification	Model:	NMTG-S12864EFYHSGY-10B	Rev. No.
			Issued Date.
			Page.
			7 / 20

2.4 Power Supply ON/OFF Sequence

2.4.1 ON Sequence

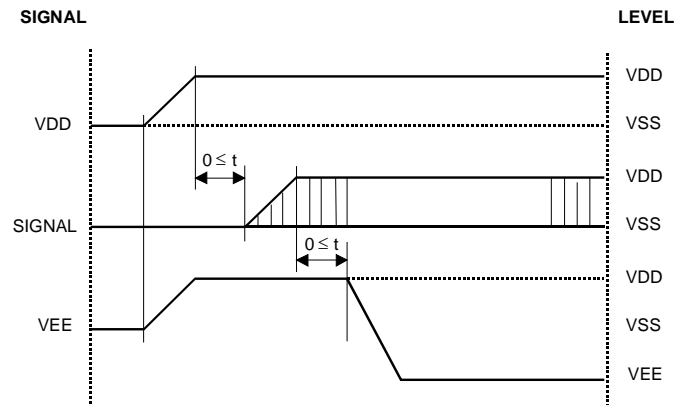

2.4.2 OFF Sequence

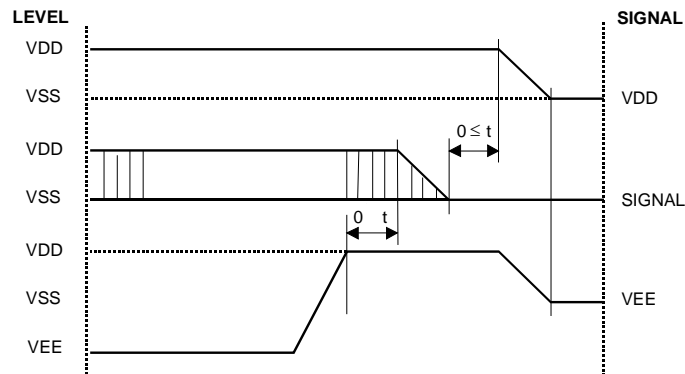

Please maintain the above sequence when turning on and off the power supply of the module. If VEE is supplied to the module while internal alternate signal for LCD driving (M) is unstable or RESET is active, DC component will be supplied to the LCD panel. This may cause damage to the LCD module.



Microtips Technology Inc.

Messrs.						
Product Specification	Model:	NMTG-S12864EFYHSGY-10B	Rev. No.	Issued Date.	Page.	
			A	Jun. 20, 08	8 / 20	

2.5 Lighting Specifications

2.5.1 Absolute Maximum Ratings

Ta = 25°C

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Forward Current	I _F	-	-	-	160	mA
Reverse Voltage	V _R	-	-	-	8.0	V
LED Power Dissipation	P _D	-	-	-	0.72	W

2.5.2 Operating Characteristics

Ta = 25°C

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Forward Voltage	V _F	I _F = 100mA	3.8	4.2	4.5	V
Reverse Current	I _R	V _R = 8V	-	-	0.5	mA
Luminance of Backlight Surface*	L	I _F = 100mA	21	33	45	cd/m ²
Spectrum radiation bandwidth	Δλ	I _F = 100mA	-	30	-	nm
Peak emission wavelength	λ _p	I _F = 100mA	568	573	578	nm
Uniformity*	-	I _F = 100mA	-	30	50	%
Chromaticity Coordinate	X	I _F = 100mA	0.442	0.462	0.482	-
	Y	I _F = 100mA	0.484	0.504	0.524	-

*Measured from the surface of backlight.

*Uniformity = (Min./Max.) x 100%



Microtips Technology Inc.

Messrs.			Rev. No.	Issued Date.	Page.
Product Specification	Model:	NMTG-S12864EFYHSGY-10B	A	Jun. 20, 08	9 / 20

3. Optical Specifications

3.1 LCD Driving Voltage Recommended

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
LCD Driving Voltage Note 1	$V_{DD}-V_O$	Ta = -20 °C	9.90	10.2	10.5	V
		Ta = 25 °C	9.40	9.70	10.0	V
		Ta = 70 °C	8.70	9.00	9.30	V

Note 1: Voltage (Applied actual waveform to LCD Module) for the best contrast. The range of minimum and maximum shows tolerance of the operating voltage. The specified contrast ratio and response time are not guaranteed over the entire range.

3.2 Optical Characteristics

Ta=25 °C, 1/64 Duty, 1/9 Bias, $V_{DD} = 5V$ (Note 4), $\theta = 0^\circ$, $\phi = 270^\circ$

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Contrast Ratio Note 1	C	$\theta = 0^\circ, \phi = 0^\circ$	--	9.3	--	--
Viewing Angle (Shown in 3.3)	Right	$\theta_R, \phi = 0^\circ$	--	40	--	deg.
	Left	$\theta_L, \phi = 180^\circ$	--	30	--	deg.
	Back	$\theta_B, \phi = 90^\circ$	--	35	--	deg.
	Front	$\theta_F, \phi = 270^\circ$	--	50	--	deg.
Response Time	Rise Note 2	T_{ON}	--	250	750	msec
	Decay Note 3	T_{OFF}	--	300	900	msec

Note 1: Contrast ratio is defined as follows.

$$CR = L_{OFF} / L_{ON}$$

L_{ON} : Luminance of the ON segments, L_{OFF} : Luminance of the OFF segments


Note 2: The time that the luminance level reaches 90% of the saturation level from 0% when ON signal is applied.

Note 3: The time that the luminance level reaches 10% of the saturation level from 100% when OFF signal is applied.

Note 4: Definition of Driving Voltage V_D . Assuming that the typical driving waveforms shown below are applied to the LCD Panel at 1/A Duty - 1/B Bias (A: Duty Number, B: Bias Number). Driving voltage V_D is defined as follows: $V_D = (V_{th1} + V_{th2}) / 2$

V_{th1} : The voltage VO-P that should provide 50% of the saturation level in the luminance at the segment which the ON signal is applied to.


V_{th2} : The voltage VO-P that should provide 50% of the saturation level in the luminance at the segment which the OFF signal is applied to.

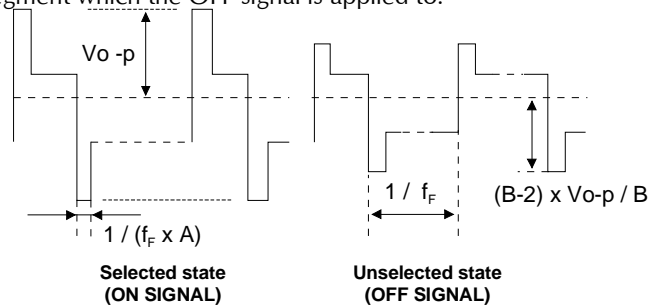


Microtips Technology Inc.

Messrs.			
Product Specification	Model: NMTG-S12864EFYHSGY-10B	Rev. No.	Issued Date.
		A	Jun. 20, 08
		Page. 10 / 20	

3.3 Definition of Viewing Angle and Optimum Viewing Area

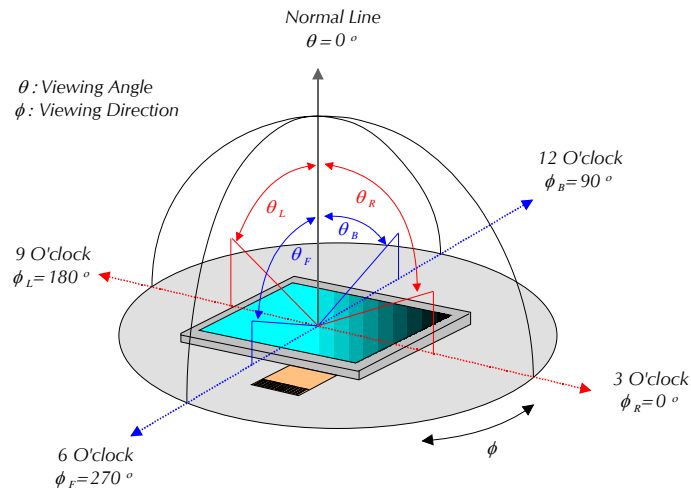


3.4 Definition of Viewing Angle θ_j and θ_b

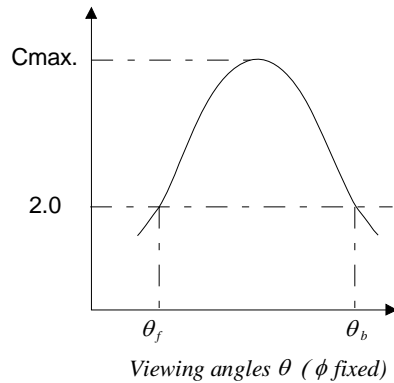

Optimum viewing angle with the naked eye and viewing angle θ at Cmax. Above are not always the same.

3.5 Definition of Contrast C, $C = \text{Brightness of selected dot (B1)} / \text{Brightness of unselected dot (B2)}$

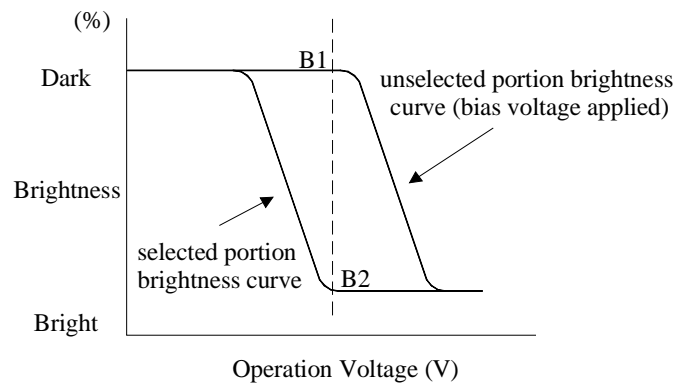

Microtips Technology Inc.

Messrs.					
Product Specification	Model:	NMTG-S12864EFYHSGY-10B	Rev. No.	Issued Date.	Page.
			A	Jun. 20, 08	11 / 20


4. I/O Terminal

4.1 Pin Assignment

No.	Symbol	Level	Function
1	FG / VEE	-	Frame Ground
2	V _{SS}	-	Power Supply (0V, GND)
3	V _{DD}	-	Power Supply for Logic
4	V _O	-	Power Supply for LCD Drive
5	/WR	Input	Data Write: Write data into SAP1024B when WR=L
6	/RD	Input	Data Read. Read data from SAP1024B when RD=L
7	/CE	Input	Chip Enable for SAP1024B. CE must be LOW when CPU communication with SAP1024B.
8	/CD	Input	WR=L.....C/D=H: Command Write C/D=L: Data Write RD=L.....C/D=H: Status Read C/D=L Data Read
9	/RST	Input	H.....Normal (SAP1024B has internal pull-up resistor) L.....Initialize SAP1024B. Text and graphic have address and text and graphic area settings are retained.
10	DB0	I/O	Data Bus Line / Non-connection at 4-bit operation
11	DB1	I/O	Data Bus Line / Non-connection at 4-bit operation
12	DB2	I/O	Data Bus Line / Non-connection at 4-bit operation
13	DB3	I/O	Data Bus Line / Non-connection at 4-bit operation
14	DB4	I/O	Data Bus Line
15	DB5	I/O	Data Bus Line
16	DB6	I/O	Data Bus Line
17	DB7	I/O	Data Bus Line
18	FS	Input	Pins for selection for fonts
19	BKL A	-	Power supply for LED Backlight Anode.
20	BKL K	-	Power supply for LED Backlight Cathode.

4.2 Example of Power Supply

It is recommended to apply a potentiometer for the contrast adjust due to the tolerance of the driving voltage and its temperature dependence.

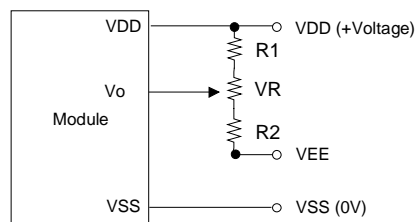


$$R1+R2+VR=10 \sim 20K\Omega$$



Microtips Technology Inc.

Messrs.			
Product Specification	Model: NMTG-S12864EFYHSGY-10B	Rev. No.	Issued Date.
		A	Jun. 20, 08
			Page. 12 / 20

4.3 Block Diagram

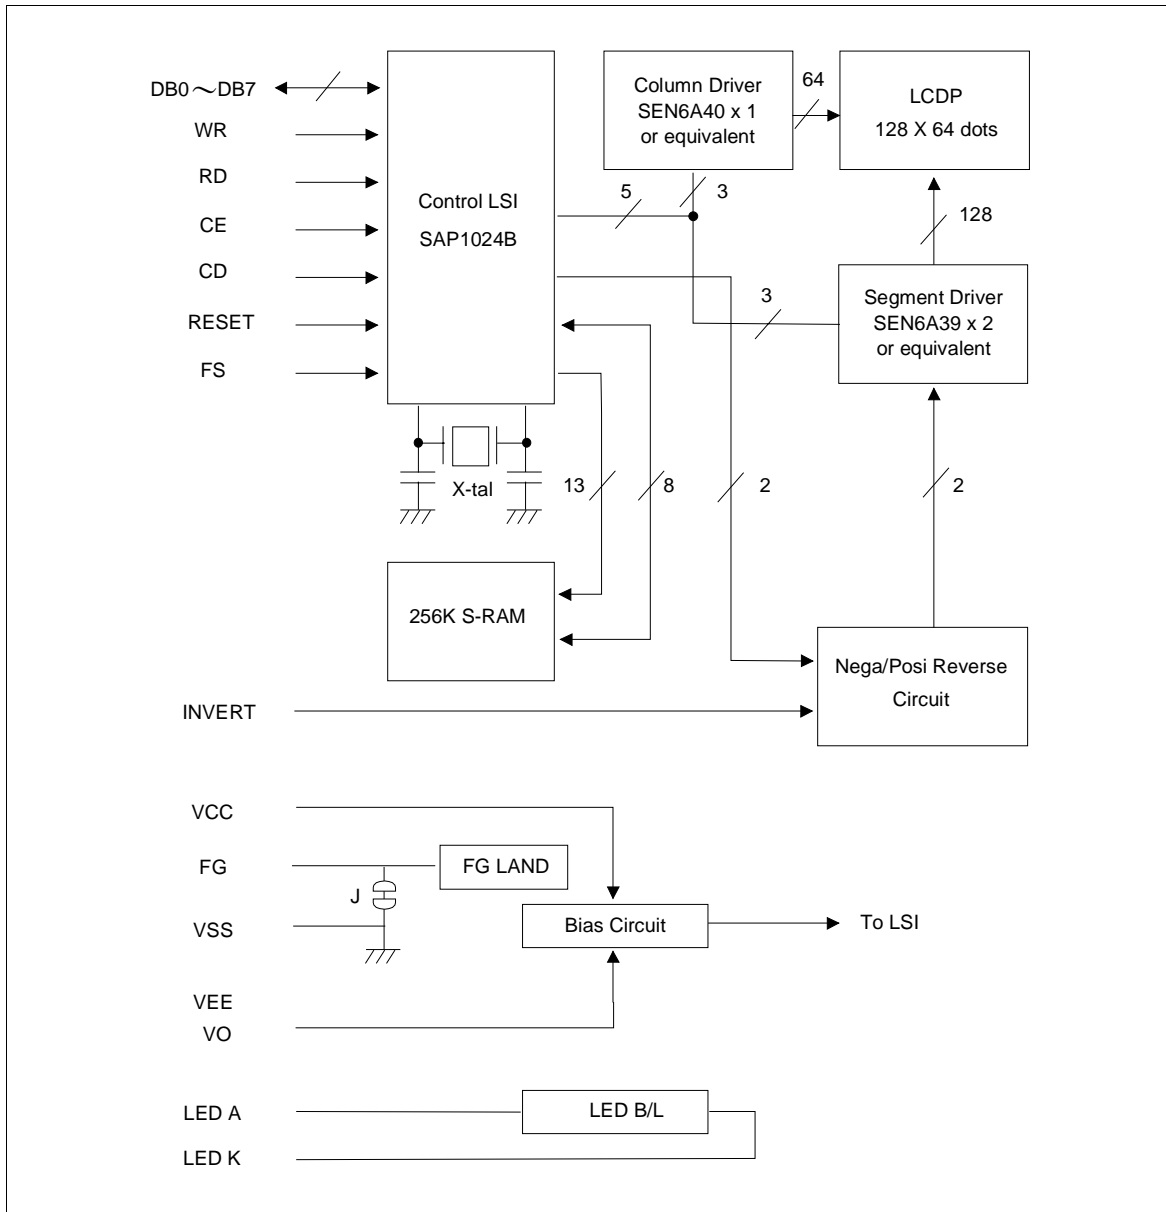


Microtips Technology Inc.

Messrs.					
Product Specification	Model:	NMTG-S12864EFYHSGY-10B	Rev. No.	Issued Date.	Page.
			A	Jun. 20, 08	13 / 20

5. Reliability Test

5.1 Test Item

No change on display and in operation under the following test condition.

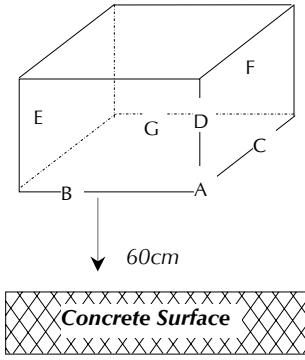No.	Test Item	Description	Condition	Note
1.	High Temperature (Operation)	Durability test under long time high temperature with electrical stress (voltage, current)	70°C ± 2°C 96hrs	
2.	High Temperature (Storage)	Durability test under long time high temperature storage	80°C ± 2°C 96hrs	4
3.	Low Temperature (Operation)	Durability test under long time low temperature with electrical stress (voltage, current)	-20°C ± 2°C, 96hrs	3
4.	Low Temperature (Storage)	Durability test under long time low temperature storage	-30°C ± 2°C, 96hrs	3, 4
5.	Damp Proof Test	Durability test under long time high temperature and high humidity	40°C ± 2°C, 90~95% RH 96hrs	3, 4
6.	Vibration Test	Total fixed amplitude: 1.5mm Vibration frequency: 10~55Hz One cycle 60 seconds to 3 directions of X, Y, Z for each 15 minutes	--	5
7.	Drop Test	To be measured after dropping from 60cm high on the concrete surface in packing state. 		

Note 1: Unless otherwise specified, tests will be conducted under the following condition,

Temperature : 25°C ± 2°C

Humidity : 65% ± 5%

Note 2: Unless otherwise specified, tests will be not conducted under functioning state.

Note 3: No dew condensation to be observed.

Note 4: The function test shall be conducted after 4 hours storage at the normal temperature and humidity after removed from the test chamber.

Note 5: Vibration test will be conducted to the product itself without putting it in a container.



Microtips Technology Inc.

Messrs.				Rev. No.	Issued Date.	Page.
Product Specification	Model:	NMTG-S12864EFYHSGY-10B				
			A	Jun. 20, 08	14 / 20	

5.2 Judgment Standard

Failure Mode	Test Item							Judgment Standard
	1	2	3	4	5	6	7	
Orientation	*	*	*	*	*			No remarkable degradation of appearance under bias/ non-bias condition
Current Value (IAC)	*	*	*	*	*			No remarkable increase
Contrast	*		*	*	*			No remarkable poor contrast
Domain	*	*	*	*	*			Less than 20% of all dots have reverse tilt of more than on third of one dot area.
Bubble (Inside Cell)	*	*	*	*	*	*		As per "Appearance Standard" (Note. Including one which disappear after 25°C 2H)
Polarizer	*				*	*		As per "Appearance Standard" no remarkable appearance change
Glass Damage							*	As per "Appearance Standard"

Note.1. * is strong linkage between Failure Mode and Test Item.

2. Number of Test Item should be referred to former page.

3. Judgment and Standard value should be fixed by other inspection standard and criteria samples.




Microtips Technology Inc.

Messrs.					
Product Specification	Model:	NMTG-S12864EFYHSGY-10B	Rev. No.	Issued Date.	Page.
			A	Jun. 20, 08	15 / 20


6. Appearance Standards

6.1 Inspection Conditions

The LCD shall be inspected under 40W white fluorescent light. The distance between the eyes and the sample shall be more than 30cm. All directions for inspecting the sample should be within 45° against perpendicular line.

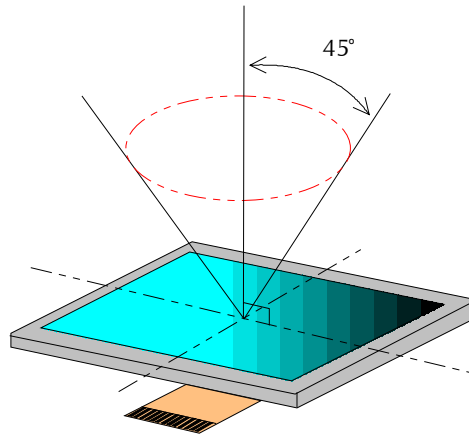

6.2 Definition of Applicable Zones

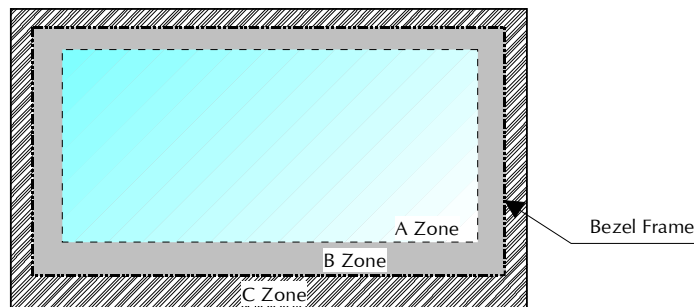

A Zone : Active display area
 B Zone : Area from outside of "A Zone" to validity viewing area
 C Zone : Rest parts
 A Zone + B Zone = Validity viewing area



Microtips Technology Inc.

Messrs.			
Product Specification	Model:	NMTG-S12864EFYHSGY-10B	Rev. No.
			Issued Date.
			Page.
			A Jun. 20, 08 16 / 20

6.3 Standards





No.	Parameter	Criteria																																																							
1.	Black and White Spots, Foreign Substances	<p>(1) Round Shape</p> <table border="1"> <thead> <tr> <th rowspan="2">Dimension (mm) \ Zone</th> <th colspan="3">Acceptable Number</th> </tr> <tr> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>$D \leq 0.1$</td> <td>*</td> <td>*</td> <td>*</td> </tr> <tr> <td>$0.1 < D \leq 0.2$</td> <td>3</td> <td>5</td> <td>*</td> </tr> <tr> <td>$0.2 < D \leq 0.25$</td> <td>2</td> <td>3</td> <td>*</td> </tr> <tr> <td>$0.25 < D \leq 0.3$</td> <td>0</td> <td>1</td> <td>*</td> </tr> <tr> <td>$0.3 < D$</td> <td>0</td> <td>0</td> <td>*</td> </tr> </tbody> </table> <p>$D = (\text{Long} + \text{Short})/2$ *: Disregard</p> <p>(2) Line Shape</p> <table border="1"> <thead> <tr> <th rowspan="2">Zone \ X (mm)</th> <th rowspan="2">Zone \ Y (mm)</th> <th colspan="3">Acceptable Number</th> </tr> <tr> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>--</td> <td>$0.03 \geq W$</td> <td>*</td> <td>*</td> <td>*</td> </tr> <tr> <td>$2.0 \geq L$</td> <td>$0.05 \geq W$</td> <td>3</td> <td>3</td> <td>*</td> </tr> <tr> <td>$1.0 \geq L$</td> <td>$0.1 \geq W$</td> <td>3</td> <td>3</td> <td>*</td> </tr> <tr> <td>--</td> <td>$0.1 < W$</td> <td colspan="3">In the same way (1)</td> </tr> </tbody> </table> <p>X : Length Y: Width *: Disregard Total defects shall not exceed 5.</p>	Dimension (mm) \ Zone	Acceptable Number			A	B	C	$D \leq 0.1$	*	*	*	$0.1 < D \leq 0.2$	3	5	*	$0.2 < D \leq 0.25$	2	3	*	$0.25 < D \leq 0.3$	0	1	*	$0.3 < D$	0	0	*	Zone \ X (mm)	Zone \ Y (mm)	Acceptable Number			A	B	C	--	$0.03 \geq W$	*	*	*	$2.0 \geq L$	$0.05 \geq W$	3	3	*	$1.0 \geq L$	$0.1 \geq W$	3	3	*	--	$0.1 < W$	In the same way (1)		
Dimension (mm) \ Zone	Acceptable Number																																																								
	A	B	C																																																						
$D \leq 0.1$	*	*	*																																																						
$0.1 < D \leq 0.2$	3	5	*																																																						
$0.2 < D \leq 0.25$	2	3	*																																																						
$0.25 < D \leq 0.3$	0	1	*																																																						
$0.3 < D$	0	0	*																																																						
Zone \ X (mm)	Zone \ Y (mm)	Acceptable Number																																																							
		A	B	C																																																					
--	$0.03 \geq W$	*	*	*																																																					
$2.0 \geq L$	$0.05 \geq W$	3	3	*																																																					
$1.0 \geq L$	$0.1 \geq W$	3	3	*																																																					
--	$0.1 < W$	In the same way (1)																																																							
2.	Air Bubbles (between glass & polarizer)	<table border="1"> <thead> <tr> <th rowspan="2">Dimension (mm) \ Zone</th> <th colspan="3">Acceptable Number</th> </tr> <tr> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>$D \leq 0.3$</td> <td>*</td> <td>*</td> <td>*</td> </tr> <tr> <td>$0.3 < D \leq 0.4$</td> <td>3</td> <td>*</td> <td>*</td> </tr> <tr> <td>$0.4 < D \leq 0.6$</td> <td>2</td> <td>3</td> <td>*</td> </tr> <tr> <td>$0.6 < D$</td> <td>0</td> <td>0</td> <td>*</td> </tr> </tbody> </table> <p>*: Disregard Total defects shall not exceed 3.</p>	Dimension (mm) \ Zone	Acceptable Number			A	B	C	$D \leq 0.3$	*	*	*	$0.3 < D \leq 0.4$	3	*	*	$0.4 < D \leq 0.6$	2	3	*	$0.6 < D$	0	0	*																																
Dimension (mm) \ Zone	Acceptable Number																																																								
	A	B	C																																																						
$D \leq 0.3$	*	*	*																																																						
$0.3 < D \leq 0.4$	3	*	*																																																						
$0.4 < D \leq 0.6$	2	3	*																																																						
$0.6 < D$	0	0	*																																																						

To be continued.....



Microtips Technology Inc.

Messrs.					
Product Specification	Model:	NMTG-S12864EFYHSGY-10B	Rev. No.	Issued Date.	Page.
			A	Jun. 20, 08	17 / 20

No.	Parameter	Criteria
3.	The Shape of Dot	<p>(1) Dot Shape (with Dent)</p>  <p>0.15 ≥</p> <p>As per the sketch of left hand.</p> <p>(2) Dot Shape (with Projection)</p>  <p>Should not be connected to next dot.</p> <p>(3) Pin Hole</p>  <p>$(X+Y)/2 \leq 0.2\text{mm}$ (Less than 0.1mm is no counted.)</p> <p>(4) Deformation</p>  <p>$(X+Y)/2 \leq 0.2\text{mm}$</p> <p>Total acceptable number: 1/dot, 5/cell (Defect number of (4): 1pc.)</p>
4.	Polarizer Scratches	Not to be conspicuous defects.
5.	Polarizer Dirts	If the stains are removed easily from LCDP surface, the module is not defective.
6.	Complex Foreign Substance Defects	Black spots, line shaped foreign substance or air bubbles between glass & polarizer should be 5pcs maximum in total.
7.	Distance between different Foreign Substance defects	$D \leq 0.2$: 20mm or more $0.2 < D$: 40mm or more



Microtips Technology Inc.

Messrs.					
Product Specification	Model:	NMTG-S12864EFYHSGY-10B	Rev. No.	Issued Date.	Page.
			A	Jun. 20, 08	18 / 20

7. Handling and Precautions

The Following precautions will guide you in handling our product correctly.

- 1 Liquid crystal display devices
 - 1.1 The liquid crystal display device panel used in the liquid crystal display module is made of plate glass. Avoid any strong mechanical shock. Should the glass break handle it with care.
 - 1.2 The polarizer adhering to the surface of the LCD is made of a soft material. Guard against scratching it.
- 2 Care of the liquid crystal display module against static electricity discharge.
 - 2.1 When working with the module, be sure to ground your body and any electrical equipment you may be using. We strongly recommend the use of anti static mats (made of rubber), to protect work tables against the hazards of electrical shock.
 - 2.2 Avoid the use of work clothing made of synthetic fibers. We recommend cotton clothing or other conductivity-treated fibers.
 - 2.3 Slowly and carefully remove the protective film from the LCD module, since this operation can generate static electricity.
- 3 When the LCD module alone must be stored for long periods of time:
 - 3.1 Protect the modules from high temperature and humidity.
 - 3.2 Keep the modules out of direct sunlight or direct exposure to ultra-violet rays.
 - 3.3 Protect the modules from excessive external forces.
- 4 Use the module with a power supply that is equipped with an over current protector circuit, since the module is not provided with this protective feature.
- 5 Do not ingest the LCD fluid itself should it leak out of a damaged LCD module. Should hands or clothing come in contact with LCD fluid, wash immediately with soap.
- 6 Conductivity is not guaranteed for models that use metal holders where solder connections between the metal holder and the PCB are not used. Please contact us to discuss appropriate ways to assure conductivity.



Microtips Technology Inc.

Messrs.					
Product Specification	Model:	NMTG-S12864EFYHSGY-10B	Rev. No.	Issued Date.	Page.
			A	Jun. 20, 08	19 / 20

8. Warranty

This product has been manufactured to your company's specifications as a part for use in your company's general electronic products. It is guaranteed to perform according to delivery specifications. For any other use apart from general electronic equipment, we cannot take responsibility if the product is used in medical devices, nuclear power control equipment, aerospace equipment, fire and security systems, or any other applications in which there is a direct risk to human life and where extremely high levels of reliability are required. If the product is to be used in any of the above applications, we will need to enter into a separate product liability agreement.

- 1 13 months guarantee starts from the date code.
- 2 We cannot accept responsibility for any defect, which may arise from additional manufacturing of the product (including disassembly and reassembly), after product delivery.
- 3 We cannot accept responsibility for any defect, which may arise after the application of strong external force to the product.
- 4 We cannot accept responsibility for any defect, which may arise due to the application of static electricity after the product has passed your company's acceptance inspection procedures.
- 5 We cannot accept responsibility for industrial property, which may arise through the use of your product, with exception to those issues relating directly to the structure or method of manufacturing of our product. Microtips-origin longer than one year from Microtips production.

9. Dimensional Outlines

- See the next page.....



Microtips Technology Inc.

