
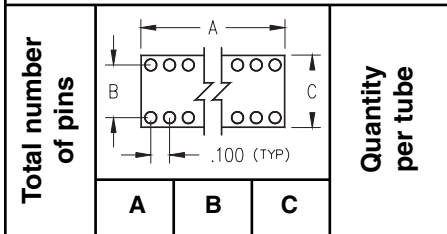


- Low profile DIP socket, sits only .122" above the PCB.
- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 218 for details.
- Series 115 use MM #0501 pins. See page 133 for details.
- Insulators are high temperature thermoplastic.

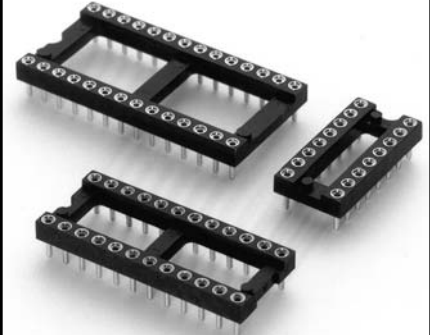

Ordering Information

Total number of pins	Pin Spacing			Quantity per tube
	A	B	C	
10	0.5	0.2	0.3	41
4	0.2	0.3	0.4	102
6	0.3	0.3	0.4	67
8	0.4	0.3	0.4	50
10	0.5	0.3	0.4	40
14	0.7	0.3	0.4	28
16	0.8	0.3	0.4	25
18	0.9	0.3	0.4	22
20	1.0	0.3	0.4	20
22	1.1	0.3	0.4	18
24	1.2	0.3	0.4	16
28	1.4	0.3	0.4	14
20	1.0	0.4	0.5	20
22	1.1	0.4	0.5	18
24	1.2	0.4	0.5	16
28	1.4	0.4	0.5	14
32	1.6	0.4	0.5	12
24	1.2	0.6	0.7	16
28	1.4	0.6	0.7	14
32	1.6	0.6	0.7	12
36	1.8	0.6	0.7	11
40	2.0	0.6	0.7	10
42	2.1	0.6	0.7	9
48	2.4	0.6	0.7	8
50	2.5	0.6	0.7	8
52	2.6	0.6	0.7	7
50	2.5	0.9	1.0	8
52	2.6	0.9	1.0	7
64	3.2	0.9	1.0	6

115-XX-210-41-001000
115-XX-304-41-001000
115-XX-306-41-001000
115-XX-308-41-001000
115-XX-310-41-001000
115-XX-314-41-001000
115-XX-316-41-001000
115-XX-318-41-001000
115-XX-320-41-001000
115-XX-322-41-001000
115-XX-324-41-001000
115-XX-328-41-001000
115-XX-420-41-001000
115-XX-422-41-001000
115-XX-424-41-001000
115-XX-428-41-001000
115-XX-432-41-001000
115-XX-624-41-001000
115-XX-628-41-001000
115-XX-632-41-001000
115-XX-636-41-001000
115-XX-640-41-001000
115-XX-642-41-001000
115-XX-648-41-001000
115-XX-650-41-001000
115-XX-652-41-001000
115-XX-950-41-001000
115-XX-952-41-001000
115-XX-964-41-001000



For RoHS compliance select plating code.

For Electrical, Mechanical & Environmental Data, See pg. 4

XX=Plating Code See Below

SPECIFY PLATING CODE XX=	93	43
Sleeve (Pin)	200μ" Sn/Pb	200μ" Sn
Contact (Clip)	30μ" Au	30μ" Au

Downloaded from Elcodis.com electronic components distributor