


# TAZ Series



## CWR09 - MIL-PRF-55365/4 Established Reliability, COTS-Plus & Space Level

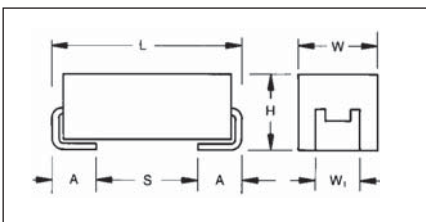

### MARKING

(White marking on black body)



**Polarity Stripe (+)**

**Capacitance Code  
Rated Voltage**

This is the original high reliability molded tantalum chip series and the case sizes still represent the most flexible of surface mount form factors. TAZ offers nine case sizes, eight of which (A through H) are fully qualified to MIL-PRF-55365/4, and also includes the original sub-miniature R case (non-QPL).

This series is fully interchangeable with CWR06 conformal types, while offering the advantages of molded body / compliant termination construction (ensuring no TCE mismatch with any substrate). This construction is compatible with a wide range of SMT board assembly processes including wave or reflow solder, conductive epoxy or compression bonding techniques.

The parts also carry full polarity and capacitance / voltage marking. The five smaller cases are characterized by their low profile construction, with the A case being

the world's smallest molded military tantalum chip.

All 4V to 50V ratings are qualified to MIL-PRF-55365 Weibull "B", "C", "D" and "T" levels, with all surge options ("A", "B" & "C") available, and a new COTS-Plus 63V rating has been introduced.

For Space Level applications, AVX SRC 9000 qualification is recommended (see ratings table for part number availability).

There are four termination finishes available: solder plated, fused solder plated, hot solder dipped and gold plated (these are "H", "K", "C" and "B" termination, respectively, per MIL-PRF-55365). In addition, the molding compound has been selected to meet the requirements of UL94V-0 (Flame Retardancy) and outgassing requirements of NASA SP-R-0022A.

### CASE DIMENSIONS:

millimeters (inches)

Case Code	Length (L) ±0.38 (0.015)	Width (W) ±0.38 (0.015)	Height (H) ±0.38 (0.015)	Term. Width (W <sub>t</sub> )	Term. Length (A) ±0.13 (0.005)	S min	Typical Weight (g)
R	2.05 (0.081) ±0.20 (0.008)	1.30 (0.051) +0.20 (0.008) -0.10 (0.004)	1.20 (0.047) max	1.0±0.10 (0.039±0.004)	0.50 (0.020) +0.30 (0.012) -0.20 (0.008)	0.07 (0.028)	0.010
A	2.54 (0.100)	1.27 (0.050)	1.27 (0.050)	1.27±0.13 (0.050±0.005)	0.76 (0.030)	0.38 (0.015)	0.016
B	3.81 (0.150)	1.27 (0.050)	1.27 (0.050)	1.27±0.13 (0.050±0.005)	0.76 (0.030)	1.65 (0.065)	0.025
C	5.08 (0.200)	1.27 (0.050)	1.27 (0.050)	1.27±0.13 (0.050±0.005)	0.76 (0.030)	2.92 (0.115)	0.035
D	3.81 (0.150)	2.54 (0.100)	1.27 (0.050)	2.41+0.13/-0.25 (0.095+0.005/-0.010)	0.76 (0.030)	1.65 (0.065)	0.045
E	5.08 (0.200)	2.54 (0.100)	1.27 (0.050)	2.41+0.13/-0.25 (0.095+0.005/-0.010)	0.76 (0.030)	2.92 (0.115)	0.065
F	5.59 (0.220)	3.43 (0.135)	1.78 (0.070)	3.30±0.13 (0.130±0.005)	0.76 (0.030)	3.43 (0.135)	0.125
G	6.73 (0.265)	2.79 (0.110)	2.79 (0.110)	2.67±0.13 (0.105±0.005)	1.27 (0.050)	3.56 (0.140)	0.205
H	7.24 (0.285)	3.81 (0.150)	2.79 (0.110)	3.68+0.13/-0.51 (0.145+0.005/-0.020)	1.27 (0.050)	4.06 (0.160)	0.335

### CWR09-MIL-PRF 55365/11

### CAPACITANCE AND RATED VOLTAGE, V<sub>R</sub> (VOLTAGE CODE) RANGE (LETTER DENOTES CASE SIZE)

Capacitance		Rated Voltage DC (V <sub>R</sub> ) at 85°C								
µF	Code	4V (C)	6V (D)	10V (F)	15V (H)	20V (J)	25V (K)	35V (M)	50V (N)	63V
0.10	104								A	
0.15	154								A	
0.22	224							A	B	
0.33	334	R		R			A		B	
0.47	474			R		A		B	C	
0.68	684				A	B	B	C	D	
1.0	105			A/R		B	C	D	E	
1.5	155		A		B	C	D	E	F	
2.2	225	A/R		B	C	D	E		F	F*
3.3	335		B	C	D	E		F	G	
4.7	475	B	C	D	E		F	G	H	
6.8	685	C	D	E		F	G	H		
10	106	D	E		F	G	H			
15	156	E		F	G	H				
22	226		F		G	H				
33	336	F		G	H					
47	476		G	H						
68	686	G	H							
100	107	H								
150	157									
220	227									

\* Z, B Reliability Levels only available.



### HOW TO ORDER

#### COTS-PLUS & MIL QPL (CWR09):

TAZ	H	686	*	006	C	□	#	@	0	^	++
Type	Case Size	Capacitance Code pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow)	Capacitance Tolerance M = ±20% K = ±10% J = ±5%	Voltage Code 004 = 4Vdc 006 = 6Vdc 010 = 10Vdc 015 = 15Vdc 020 = 20Vdc 025 = 25Vdc 035 = 35Vdc 050 = 50Vdc 063 = 63Vdc	Standard or Low ESR Range C = Std ESR L = Low ESR	Packaging B = Bulk R = 7" T&R S = 13" T&R W = Waffle  See page 5 for additional packaging options.	Inspection Level S = Std. Conformance L = Group A  M = MIL (JAN) CWR09	Reliability Grade Weibull: B = 0.1%/1000 hrs. 90% conf. C = 0.01%/1000 hrs. 90% conf. D = 0.001%/1000 hrs. 90% conf. T = T Level Z = Non-ER	Qualification Level 0 = N/A 9 = SRC9000	Termination Finish H = Solder Plated 0 = Fused Solder Plated 8 = Hot Solder Dipped 9 = Gold Plated 7 = Matte Sn (COTS-Plus only)	Surge Test Option 00 = None 23 = 10 Cycles, +25°C 24 = 10 Cycles, -55°C & +85°C 45 = 10 cycles, -55°C & +85°C before Weibull

#### CWR09 P/N CROSS REFERENCE:

CWR09	D	^	686	*	@	+	□
Type	Voltage Code C = 4Vdc D = 6Vdc F = 10Vdc H = 15Vdc J = 20Vdc K = 25Vdc M = 35Vdc N = 50Vdc = 63Vdc	Termination Finish H = Solder Plated K = Solder Fused Dipped B = Gold Plated	Capacitance Code pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow)	Capacitance Tolerance M = ±20% K = ±10% J = ±5%	Reliability Grade Weibull: B = 0.1%/1000 hrs. 90% conf. C = 0.01%/1000 hrs. 90% conf. D = 0.001%/1000 hrs. 90% conf. T = T Level A = Non-ER	Surge Test Option A = 10 cycles, +25°C B = 10 cycles, -55°C & +85°C C = 10 cycles, -55°C & +85°C before Weibull If blank, None required	Packaging Bulk = Standard TR = 7" T&R WR = Waffle  See page 5 for additional packaging options.

#### SPACE LEVEL OPTIONS TO SRC9000\*:

TAZ	H	686	*	006	C	□	L	@	9	^	++
Type	Case Size	Capacitance Code pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow)	Capacitance Tolerance M = ±20% K = ±10% J = ±5%	Voltage Code 004 = 4Vdc 006 = 6Vdc 010 = 10Vdc 015 = 15Vdc 020 = 20Vdc 025 = 25Vdc 035 = 35Vdc 050 = 50Vdc 063 = 63Vdc	Standard or Low ESR Range C = Std ESR L = Low ESR	Packaging B = Bulk R = 7" T&R S = 13" T&R W = Waffle  See page 5 for additional packaging options.	Inspection Level L = Group A	Reliability Grade Weibull: B = 0.1%/1000 hrs. 90% conf. C = 0.01%/1000 hrs. 90% conf. D = 0.001%/1000 hrs. 90% conf.	Qualification Level 9 = SRC9000	Termination Finish H = Solder Plated 0 = Fused Solder Plated 8 = Hot Solder Dipped 9 = Gold Plated	Surge Test Option 00 = 10 Cycles, -55°C & +85°C 45 = 10 cycles, -55°C & +85°C before Weibull

\*Contact factory for AVX SRC9000 Space Level SCD details.

### TECHNICAL SPECIFICATIONS

Technical Data:	Unless otherwise specified, all technical data relate to an ambient temperature of 25°C										
Capacitance Range:	0.1 μF to 100 μF										
Capacitance Tolerance:	±5%; ±10%; ±20%										
Rated Voltage: (V <sub>R</sub> )	≤85°C:	4	6	10	15	20	25	35	50	63	
Category Voltage: (V <sub>C</sub> )	125°C:	2.7	4	7	10	13	17	23	33	42	
Surge Voltage: (V <sub>S</sub> )	≤85°C:	5.2	8	13	20	26	32	46	65	82	
	125°C:	3.4	5	8	13	16	20	28	40	50	
Temperature Range:	-55°C to +125°C										

# TAZ Series

## CWR09 - MIL-PRF-55365/4 Established Reliability, COTS-Plus & Space Level



RATING & PART NUMBER REFERENCE			Parametric Specifications by Rating per MIL-PRF-55365/4										Typical Ripple Data by Rating							
CWR09 P/N	AVX MIL & COTS-Plus P/N	AVX SRC9000 P/N	Case	Cap @ 120Hz µF @ 25°C	DC Rated Voltage V @ +85°C	ESR @ 100kHz Ohms @ +25°C	DCL max			DF Max			Power Dissipation W	Ripple						
							+25°C (µA)	+85°C (µA)	+125°C (µA)	+25°C (%)	+85/125°C (%)	-55°C (%)		25°C A (100kHz)	85°C Ripple A (100kHz)	125°C Ripple A (100kHz)	25°C Ripple V (100kHz)	85°C Ripple V (100kHz)	125°C Ripple V (100kHz)	
	TAZ R 334 * 004 C □ # 0 A ++		R	0.33	4	45	1	10	12	6	8	8	0.030	0.03	0.02	0.02	0.01	1.16	1.05	0.46
	TAZ R 225 * 004 C □ # 0 A ++		R	2.2	4	12	1	10	12	6	8	8	0.030	0.05	0.05	0.02	0.60	0.54	0.24	
CWR09C*225*+	TAZ A 225 * 004 C □ # 0 A ++	TAZ A 225 * 004 C □ # 0 A ++	A	2.2	4	8	1	10	12	6	8	8	0.050	0.08	0.07	0.03	0.63	0.57	0.25	
CWR09C*475*+	TAZ B 475 * 004 C □ # 0 A ++	TAZ B 475 * 004 C □ # 0 A ++	B	4.7	4	8	1	10	12	6	8	8	0.070	0.09	0.08	0.04	0.75	0.67	0.30	
CWR09C*685*+	TAZ C 685 * 004 C □ # 0 A ++	TAZ C 685 * 004 C □ # 0 A ++	C	6.8	4	5.5	1	10	12	6	8	8	0.075	0.12	0.11	0.05	0.64	0.58	0.26	
CWR09C*106*+	TAZ D 106 * 004 C □ # 0 A ++	TAZ D 106 * 004 C □ # 0 A ++	D	10	4	4	1	10	12	8	8	10	0.080	0.14	0.13	0.06	0.57	0.51	0.23	
CWR09C*156*+	TAZ E 156 * 004 C □ # 0 A ++	TAZ E 156 * 004 C □ # 0 A ++	E	15	4	3.5	1	10	12	8	10	12	0.090	0.16	0.14	0.06	0.56	0.51	0.22	
CWR09C*336*+	TAZ F 336 * 004 C □ # 0 A ++	TAZ F 336 * 004 C □ # 0 A ++	F	33	4	2.2	2	20	24	8	10	12	0.100	0.21	0.19	0.09	0.47	0.42	0.19	
CWR09C*686*+	TAZ G 686 * 004 C □ # 0 A ++	TAZ G 686 * 004 C □ # 0 A ++	G	68	4	1.1	3	30	36	10	12	12	0.125	0.34	0.30	0.13	0.37	0.33	0.15	
CWR09D*107*+	TAZ H 107 * 004 C □ # 0 A ++	TAZ H 107 * 004 C □ # 0 A ++	H	100	4	0.9	4	40	48	10	12	12	0.150	0.41	0.37	0.16	0.37	0.33	0.15	
CWR09D*155*+	TAZ A 155 * 006 C □ # 0 A ++	TAZ A 155 * 006 C □ # 0 A ++	A	1.5	6	8	1	10	12	6	8	8	0.050	0.08	0.07	0.03	0.63	0.57	0.25	
CWR09D*335*+	TAZ B 335 * 006 C □ # 0 A ++	TAZ B 335 * 006 C □ # 0 A ++	B	3.3	6	8	1	10	12	6	8	8	0.070	0.09	0.08	0.04	0.75	0.67	0.30	
CWR09D*475*+	TAZ C 475 * 006 C □ # 0 A ++	TAZ C 475 * 006 C □ # 0 A ++	C	4.7	6	5.5	1	10	12	6	8	8	0.075	0.12	0.11	0.05	0.64	0.58	0.26	
CWR09D*685*+	TAZ D 685 * 006 C □ # 0 A ++	TAZ D 685 * 006 C □ # 0 A ++	D	6.8	6	4.5	1	10	12	6	8	8	0.080	0.13	0.12	0.05	0.60	0.54	0.24	
CWR09D*106*+	TAZ E 106 * 006 C □ # 0 A ++	TAZ E 106 * 006 C □ # 0 A ++	E	10	6	3.5	1	10	12	8	10	12	0.090	0.16	0.14	0.06	0.56	0.51	0.22	
CWR09D*226*+	TAZ F 226 * 006 C □ # 0 A ++	TAZ F 226 * 006 C □ # 0 A ++	F	22	6	2.2	2	20	24	8	10	12	0.100	0.21	0.19	0.09	0.47	0.42	0.19	
CWR09D*476*+	TAZ G 476 * 006 C □ # 0 A ++	TAZ G 476 * 006 C □ # 0 A ++	G	47	6	1.1	3	30	36	10	12	12	0.125	0.34	0.30	0.13	0.37	0.33	0.15	
CWR09D*686*+	TAZ H 686 * 006 C □ # 0 A ++	TAZ H 686 * 006 C □ # 0 A ++	H	68	6	0.9	4	40	48	10	12	12	0.150	0.41	0.37	0.16	0.37	0.33	0.15	
	TAZ R 334 * 010 C □ # 0 A ++		R	0.33	10	50	1	10	12	6	8	8	0.030	0.02	0.02	0.01	1.22	1.10	0.49	
	TAZ R 474 * 010 C □ # 0 A ++		R	0.47	10	50	1	10	12	6	8	8	0.030	0.02	0.02	0.01	1.22	1.10	0.49	
	TAZ R 105 * 010 C □ # 0 A ++		R	1	10	10	1	10	12	6	8	8	0.030	0.05	0.05	0.02	0.55	0.49	0.22	
CWR09F*105*+	TAZ A 105 * 010 C □ # 0 A ++	TAZ A 105 * 010 C □ # 0 A ++	A	1	10	10	1	10	12	6	8	8	0.050	0.07	0.06	0.03	0.71	0.64	0.28	
CWR09F*225*+	TAZ B 225 * 010 C □ # 0 A ++	TAZ B 225 * 010 C □ # 0 A ++	B	2.2	10	8	1	10	12	6	8	8	0.070	0.09	0.08	0.04	0.75	0.67	0.30	
CWR09F*335*+	TAZ C 335 * 010 C □ # 0 A ++	TAZ C 335 * 010 C □ # 0 A ++	C	3.3	10	5.5	1	10	12	6	8	8	0.075	0.12	0.11	0.05	0.64	0.58	0.26	
CWR09F*475*+	TAZ D 475 * 010 C □ # 0 A ++	TAZ D 475 * 010 C □ # 0 A ++	D	4.7	10	4.5	1	10	12	8	8	10	0.080	0.13	0.12	0.05	0.60	0.54	0.24	
CWR09F*685*+	TAZ E 685 * 010 C □ # 0 A ++	TAZ E 685 * 010 C □ # 0 A ++	E	6.8	10	3.5	1	10	12	8	8	8	0.090	0.16	0.14	0.06	0.56	0.51	0.22	
CWR09F*156*+	TAZ F 156 * 010 C □ # 0 A ++	TAZ F 156 * 010 C □ # 0 A ++	F	15	10	2.5	2	20	24	8	10	12	0.100	0.20	0.18	0.08	0.50	0.45	0.20	
CWR09F*336*+	TAZ G 336 * 010 C □ # 0 A ++	TAZ G 336 * 010 C □ # 0 A ++	G	33	10	1.1	3	30	36	10	12	12	0.125	0.34	0.30	0.13	0.37	0.33	0.15	
CWR09F*476*+	TAZ H 476 * 010 C □ # 0 A ++	TAZ H 476 * 010 C □ # 0 A ++	H	47	10	0.9	5	50	60	10	12	12	0.150	0.41	0.37	0.16	0.37	0.33	0.15	
CWR09H*684*+	TAZ A 684 * 015 C □ # 0 A ++	TAZ A 684 * 015 C □ # 0 A ++	A	0.68	15	12	1	10	12	6	8	8	0.050	0.06	0.06	0.03	0.77	0.70	0.31	
CWR09H*155*+	TAZ B 155 * 015 C □ # 0 A ++	TAZ B 155 * 015 C □ # 0 A ++	B	1.5	15	8	1	10	12	6	8	8	0.070	0.09	0.08	0.04	0.75	0.67	0.30	
CWR09H*225*+	TAZ C 225 * 015 C □ # 0 A ++	TAZ C 225 * 015 C □ # 0 A ++	C	2.2	15	5.5	1	10	12	6	8	8	0.075	0.12	0.11	0.05	0.64	0.58	0.26	
CWR09H*335*+	TAZ D 335 * 015 C □ # 0 A ++	TAZ D 335 * 015 C □ # 0 A ++	D	3.3	15	5	1	10	12	6	8	8	0.080	0.13	0.11	0.05	0.63	0.57	0.25	
CWR09H*475*+	TAZ E 475 * 015 C □ # 0 A ++	TAZ E 475 * 015 C □ # 0 A ++	E	4.7	15	4	1	10	12	6	8	8	0.090	0.15	0.14	0.06	0.60	0.54	0.24	
CWR09H*106*+	TAZ F 106 * 015 C □ # 0 A ++	TAZ F 106 * 015 C □ # 0 A ++	F	10	15	2.5	2	20	24	6	8	8	0.100	0.20	0.18	0.08	0.50	0.45	0.20	
CWR09H*226*+	TAZ G 226 * 015 C □ # 0 A ++	TAZ G 226 * 015 C □ # 0 A ++	G	22	15	1.1	4	40	48	6	8	8	0.125	0.34	0.30	0.13	0.37	0.33	0.15	
CWR09H*336*+	TAZ H 336 * 015 C □ # 0 A ++	TAZ H 336 * 015 C □ # 0 A ++	H	33	15	0.9	5	50	60	8	8	10	0.150	0.41	0.37	0.16	0.37	0.33	0.15	
CWR09J*474*+	TAZ A 474 * 020 C □ # 0 A ++	TAZ A 474 * 020 C □ # 0 A ++	A	0.47	20	14	1	10	12	8	8	10	0.050	0.06	0.05	0.02	0.84	0.75	0.33	
CWR09J*684*+	TAZ B 684 * 020 C □ # 0 A ++	TAZ B 684 * 020 C □ # 0 A ++	B	0.68	20	10	1	10	12	6	8	8	0.070	0.08	0.08	0.03	0.84	0.75	0.33	
CWR09J*105*+	TAZ B 105 * 020 C □ # 0 A ++	TAZ B 105 * 020 C □ # 0 A ++	B	1	20	12	1	10	12	6	8	8	0.070	0.08	0.07	0.03	0.92	0.82	0.37	
CWR09J*155*+	TAZ C 155 * 020 C □ # 0 A ++	TAZ C 155 * 020 C □ # 0 A ++	C	1.5	20	6	1	10	12	6	8	8	0.075	0.11	0.10	0.04	0.67	0.60	0.27	
CWR09J*225*+	TAZ D 225 * 020 C □ # 0 A ++	TAZ D 225 * 020 C □ # 0 A ++	D	2.2	20	5	1	10	12	6	8	8	0.090	0.13	0.11	0.05	0.63	0.57	0.25	
CWR09J*335*+	TAZ E 335 * 020 C □ # 0 A ++	TAZ E 335 * 020 C □ # 0 A ++	E	3.3	20	4	1	10	12	6	8	8	0.090	0.15	0.14	0.06	0.60	0.54	0.24	
CWR09J*685*+	TAZ F 685 * 020 C □ # 0 A ++	TAZ F 685 * 020 C □ # 0 A ++	F	6.8	20	2.4	2	20	24	6	8	8	0.100	0.20	0.18	0.08	0.49	0.44	0.20	
CWR09J*156*+	TAZ G 156 * 020 C □ # 0 A ++	TAZ G 156 * 020 C □ # 0 A ++	G	15	20	1.1	3	30	36	6	8	8	0.125	0.34	0.30	0.13	0.37	0.33	0.15	
CWR09J*226*+	TAZ H 226 * 020 C □ # 0 A ++	TAZ H 226 * 020 C □ # 0 A ++	H	22	20	0.9	4	40	48	6	8	8	0.150	0.41	0.37	0.16	0.37	0.33	0.15	
CWR09K*334*+	TAZ A 334 * 025 C □ # 0 A ++	TAZ A 334 * 025 C □ # 0 A ++	A	0.33	25	15	1	10	12	6	8	8	0.050	0.06	0.05	0.02	0.87	0.78	0.36	
CWR09K*684*+	TAZ B 684 * 025 C □ # 0 A ++	TAZ B 684 * 025 C □ # 0 A ++	B	0.68	25	7.5	1	10	12	6	8	8	0.070	0.10	0.09	0.04	0.72	0.65	0.29	
CWR09K*105*+	TAZ C 105 * 025 C □ # 0 A ++	TAZ C 105 * 025 C □ # 0 A ++	C	1	25	6.5	1	10	12	6	8	8	0.075	0.11	0.10	0.04	0.70	0.63	0.28	
CWR09K*155*+	TAZ D 155 * 025 C □ # 0 A ++	TAZ D 155 * 025 C □ # 0 A ++	D	1.5	25	6.5	1	10	12	6	8	8	0.080	0.11	0.10	0.04	0.72	0.65	0.29	
CWR09K*225*+	TAZ E 225 * 025 C □ # 0 A ++	TAZ E 225 * 025 C □ # 0 A ++	E	2.2	25	3.5	1	10	12	6	8	8	0.090	0.16	0.14	0.06	0.56	0.51	0.22	
CWR09K*475*+	TAZ F 475 * 025 C □ # 0 A ++	TAZ F 475 * 025 C □ # 0 A ++	F	4.7	25	2.5	2	20	24	6	8	8	0.100	0.20	0.18	0.08	0.50	0.45	0.20	
CWR09K*685*+	TAZ G 685 * 025 C □ # 0 A ++	TAZ G 685 * 025 C □ # 0 A ++	G	6.8	25	1.2	2	20	24	6	8	8	0.125	0.32	0.29	0.13	0.39	0.35	0.15	
CWR09K*106*+	TAZ H 106 * 025 C □ # 0 A ++	TAZ H 106 * 025 C □ # 0 A ++	H	10	25	1.4	3	30	36	6	8	8	0.125	0.30	0.27	0.12	0.42	0.38	0.17	
CWR09K*156*+	TAZ H 156 * 025 C □ # 0 A ++	TAZ H 15																		

# TAZ Series

## CWR09 - MIL-PRF-55365/4 Established Reliability, COTS-Plus & Space Level




RATING & PART NUMBER REFERENCE				Parametric Specifications by Rating per MIL-PRF-55365/4								Typical Ripple Data by Rating							
				Cap @ 120Hz µF @ 25°C	DC Rated Voltage V @ +85°C	ESR @ 100kHz Ohms @ +25°C	DCL max			DF Max		Power Dissipation W	25°C Ripple A (100kHz)	85°C Ripple A (100kHz)	125°C Ripple A (100kHz)	25°C Ripple V (100kHz)	85°C Ripple V (100kHz)	125°C Ripple V (100kHz)	
CWR09 P/N	AVX MIL & COTS-Plus p/n	AVX SRC9000 P/N	Case	+25°C	+85°C	+125°C	+25°C	+(85/125)°C	-55°C										
CWR09M^224^@+	TAZ A 224 * 035 C □ □ # @ 0 ^ ++	TAZ A 224 * 035 C □ □ L @ 9 ^ ++	A	0.22	35	18	1	10	12	6	8	8	0.050	0.05	0.05	0.02	0.95	0.85	0.38
CWR09M^474^@+	TAZ B 474 * 035 C □ □ # @ 0 ^ ++	TAZ B 474 * 035 C □ □ L @ 9 ^ ++	B	0.47	35	10	1	10	12	6	8	8	0.070	0.08	0.08	0.03	0.84	0.75	0.33
CWR09M^684^@+	TAZ C 684 * 035 C □ □ # @ 0 ^ ++	TAZ C 684 * 035 C □ □ L @ 9 ^ ++	C	0.68	35	8	1	10	12	6	8	8	0.075	0.10	0.09	0.04	0.77	0.70	0.31
CWR09M^105^@+	TAZ D 105 * 035 C □ □ # @ 0 ^ ++	TAZ D 105 * 035 C □ □ L @ 9 ^ ++	D	1	35	6.5	1	10	12	6	8	8	0.090	0.11	0.10	0.04	0.72	0.65	0.29
CWR09M^155^@+	TAZ E 155 * 035 C □ □ # @ 0 ^ ++	TAZ E 155 * 035 C □ □ L @ 9 ^ ++	E	1.5	35	4.5	1	10	12	6	8	8	0.090	0.14	0.13	0.06	0.64	0.57	0.25
CWR09M^335^@+	TAZ F 335 * 035 C □ □ # @ 0 ^ ++	TAZ F 335 * 035 C □ □ L @ 9 ^ ++	F	3.3	35	2.5	1	10	12	6	8	8	0.100	0.20	0.18	0.08	0.50	0.45	0.20
CWR09M^475^@+	TAZ G 475 * 035 C □ □ # @ 0 ^ ++	TAZ G 475 * 035 C □ □ L @ 9 ^ ++	G	4.7	35	1.5	2	20	24	6	8	8	0.125	0.29	0.26	0.12	0.43	0.39	0.17
CWR09M^685^@+	TAZ H 685 * 035 C □ □ # @ 0 ^ ++	TAZ H 685 * 035 C □ □ L @ 9 ^ ++	H	6.8	35	1.3	3	30	36	6	8	8	0.150	0.34	0.31	0.14	0.44	0.40	0.18
CWR09N^104^@+	TAZ A 104 * 050 C □ □ # @ 0 ^ ++	TAZ A 104 * 050 C □ □ L @ 9 ^ ++	A	0.1	50	22	1	10	12	6	8	8	0.050	0.05	0.04	0.02	1.05	0.94	0.42
CWR09N^154^@+	TAZ A 154 * 050 C □ □ # @ 0 ^ ++	TAZ A 154 * 050 C □ □ L @ 9 ^ ++	A	0.15	50	17	1	10	12	6	8	8	0.050	0.05	0.05	0.02	0.92	0.83	0.37
CWR09N^224^@+	TAZ B 224 * 050 C □ □ # @ 0 ^ ++	TAZ B 224 * 050 C □ □ L @ 9 ^ ++	B	0.22	50	14	1	10	12	6	8	8	0.070	0.07	0.06	0.03	0.99	0.89	0.40
CWR09N^334^@+	TAZ B 334 * 050 C □ □ # @ 0 ^ ++	TAZ B 334 * 050 C □ □ L @ 9 ^ ++	B	0.33	50	12	1	10	12	6	8	8	0.070	0.08	0.07	0.03	0.92	0.82	0.37
CWR09N^474^@+	TAZ C 474 * 050 C □ □ # @ 0 ^ ++	TAZ C 474 * 050 C □ □ L @ 9 ^ ++	C	0.47	50	8	1	10	12	6	8	8	0.075	0.10	0.09	0.04	0.77	0.70	0.31
CWR09N^684^@+	TAZ D 684 * 050 C □ □ # @ 0 ^ ++	TAZ D 684 * 050 C □ □ L @ 9 ^ ++	D	0.68	50	7	1	10	12	6	8	8	0.080	0.11	0.10	0.04	0.75	0.67	0.30
CWR09N^105^@+	TAZ E 105 * 050 C □ □ # @ 0 ^ ++	TAZ E 105 * 050 C □ □ L @ 9 ^ ++	E	1	50	6	1	10	12	6	8	8	0.090	0.12	0.11	0.05	0.73	0.66	0.29
CWR09N^155^@+	TAZ F 155 * 050 C □ □ # @ 0 ^ ++	TAZ F 155 * 050 C □ □ L @ 9 ^ ++	F	1.5	50	4	1	10	12	6	8	8	0.100	0.16	0.14	0.06	0.63	0.57	0.25
CWR09N^225^@+	TAZ F 225 * 050 C □ □ # @ 0 ^ ++	TAZ F 225 * 050 C □ □ L @ 9 ^ ++	F	2.2	50	2.5	2	20	24	6	8	8	0.100	0.20	0.18	0.08	0.50	0.45	0.20
CWR09N^335^@+	TAZ G 335 * 050 C □ □ # @ 0 ^ ++	TAZ G 335 * 050 C □ □ L @ 9 ^ ++	G	3.3	50	2	2	20	24	6	8	8	0.125	0.25	0.23	0.10	0.50	0.45	0.20
CWR09N^475^@+	TAZ H 475 * 050 C □ □ # @ 0 ^ ++	TAZ H 475 * 050 C □ □ L @ 9 ^ ++	H	4.7	50	1.5	3	30	36	6	8	8	0.150	0.32	0.28	0.13	0.47	0.43	0.19
	TAZ F 225 * 063 C □ □ # @ 0 ^ ++		F	2.2	63	3	2.1	21	25.2	6	8	8	0.100	0.18	0.16	0.07	0.55	0.49	0.22

\* Z, B Reliability Levels only available.

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5V RMS with a maximum DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes.

**NOTE:** AVX reserves the right to supply a higher voltage rating or tighter tolerance part in the same case size, to the same reliability standards.



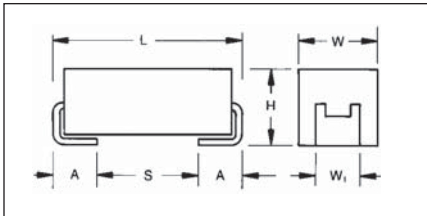

### MARKING

(White marking on black body)



**Polarity Stripe (+)**

**Capacitance Code  
Rated Voltage**

An extended range of capacitor ratings beyond CWR09 that is fully qualified to MIL-PRF-55365/11, this series represents the most flexible of surface mount form factors, offering nine case sizes (the original A through H of CWR09) and adds the new X case size.

The molded body / compliant termination construction ensures no TCE mismatch with any substrate. This construction is compatible with a wide range of SMT board assembly processes including wave or reflow solder, conductive epoxy or compression bonding techniques. The parts also carry full polarity and capacitance / voltage marking.

The four smaller cases are characterized by their low profile construction, with the

A case being the world's smallest molded military tantalum chip.

The series is qualified to MIL-PRF-55365 Weibull "B", "C", "D" and "T" levels, with all surge options ("A", "B" & "C") available.

For Space Level applications, AVX SRC 9000 qualification is recommended (see ratings table for part number availability).

There are four termination finishes available: solder plated, fused solder plated, hot solder dipped and gold plated (these are "H", "K", "C" and "B" termination, respectively, per MIL-PRF-55365). In addition, the molding compound has been selected to meet the requirements of UL94V-0 (Flame Retardancy) and out-gassing requirements of NASA SP-R-0022A.

### CASE DIMENSIONS:

millimeters (inches)

Case Code	Length (L) ±0.38 (0.015)	Width (W) ±0.38 (0.015)	Height (H) ±0.38 (0.015)	Term. Width (W <sub>t</sub> )	Term. Length (A) ±0.13 (0.005)	S min	Typical Weight (g)
A	2.54 (0.100)	1.27 (0.050)	1.27 (0.050)	1.27±0.13 (0.050±0.005)	0.76 (0.030)	0.38 (0.015)	0.016
B	3.81 (0.150)	1.27 (0.050)	1.27 (0.050)	1.27±0.13 (0.050±0.005)	0.76 (0.030)	1.65 (0.065)	0.025
C	5.08 (0.200)	1.27 (0.050)	1.27 (0.050)	1.27±0.13 (0.050±0.005)	0.76 (0.030)	2.92 (0.115)	0.035
D	3.81 (0.150)	2.54 (0.100)	1.27 (0.050)	2.41+0.13/-0.25 (0.095+0.005/-0.010)	0.76 (0.030)	1.65 (0.065)	0.045
E	5.08 (0.200)	2.54 (0.100)	1.27 (0.050)	2.41+0.13/-0.25 (0.095+0.005/-0.010)	0.76 (0.030)	2.92 (0.115)	0.065
F	5.59 (0.220)	3.43 (0.135)	1.78 (0.070)	3.30±0.13 (0.130±0.005)	0.76 (0.030)	3.43 (0.135)	0.125
G	6.73 (0.265)	2.79 (0.110)	2.79 (0.110)	2.67±0.13 (0.105±0.005)	1.27 (0.050)	3.56 (0.140)	0.205
H	7.24 (0.285)	3.81 (0.150)	2.79 (0.110)	3.68+0.13/-0.51 (0.145+0.005/-0.020)	1.27 (0.050)	4.06 (0.160)	0.035
X	6.93 Max (0.273)	5.41 Max (0.213)	2.74 Max (0.108)	3.05±0.13 (0.120±0.005)	1.19 (0.047)	N/A	0.420

### CWR19-MIL-PRF 55365/11

### CAPACITANCE AND RATED VOLTAGE, V<sub>R</sub> (VOLTAGE CODE) RANGE (LETTER DENOTES CASE SIZE)

Capacitance		Rated voltage DC (V <sub>R</sub> ) at 85°C						
µF	Code	4V (C)	6V (D)	10V (F)	15V (H)	20V (J)	25V (K)	35V (M)
0.10	104							
0.15	154							
0.22	224							
0.33	334							A
0.47	474						A	
0.68	684					A		
1.0	105				A	A	B	
1.5	155				A	B		
2.2	225			A	A	B	D	
3.3	335	A	A	A	B	D	E	
4.7	475	A	A	B/C	B/C/D	E		
6.8	685	A	B	B/C/D	D/E	E	F	G
10	106	B	B	B/C/D/E	D/E	E/F		H
15	156	B	B/D/E	D/E	E/F	F	G	
22	226	B/D	D/E	E	F	G	G/H	
33	336	D/E	E	F	F/G	H	H	
47	476	E	F	F/G	G/H	H/X		
68	686	E	F/G	G	G/H			
100	107	F	G	G/H	H			
150	157	G	G	H/X				
220	227	H	H	H				
330	337	H	H					

### HOW TO ORDER

#### COTS-PLUS & MIL QPL (CWR19):

TAZ	H	227	*	006	C	□	#	@	0	^	++
<b>Type</b>	<b>Case Size</b>	<b>Capacitance Code</b> pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow)	<b>Capacitance Tolerance</b> M = ±20% K = ±10% J = ±5%	<b>Voltage Code</b> 004 = 4Vdc 006 = 6Vdc 010 = 10Vdc 015 = 15Vdc 020 = 20Vdc 025 = 25Vdc 035 = 35Vdc 050 = 50Vdc	<b>Standard or Low ESR Range</b> C = Std ESR L = Low ESR	<b>Packaging</b> B = Bulk R = 7" T&R S = 13" T&R W = Waffle  See page 5 for additional packaging options.	<b>Inspection Level</b> S = Std. Conformance L = Group A  M = MIL (JAN) CWR19	<b>Reliability Grade</b> Weibull: B = 0.1%/1000 hrs. 90% conf. C = 0.01%/1000 hrs. 90% conf. D = 0.001%/1000 hrs. 90% conf. T = T Level Z = Non-ER	<b>Qualification Level</b> 0 = N/A 9 = SRC9000	<b>Termination Finish</b> H = Solder Plated 0 = Fused Solder Plated 8 = Hot Solder Dipped 9 = Gold Plated 7 = Matte Sn (COTS-Plus only)	<b>Surge Test Option</b> 00 = None 23 = 10 Cycles, +25°C 24 = 10 Cycles, -55°C & +85°C 45 = 10 cycles, -55°C & +85°C before Weibull

#### CWR19 P/N CROSS REFERENCE:

CWR19	D	^	227	*	@	H	+	□
<b>Type</b>	<b>Voltage Code</b> C = 4Vdc D = 6Vdc F = 10Vdc H = 15Vdc J = 20Vdc K = 25Vdc M = 35Vdc N = 50Vdc	<b>Termination Finish</b> H = Solder Plated K = Solder Fused C = Hot Solder Dipped B = Gold Plated	<b>Capacitance Code</b> pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow)	<b>Capacitance Tolerance</b> M = ±20% K = ±10% J = ±5%	<b>Reliability Grade</b> Weibull: B = 0.1%/1000 hrs. 90% conf. C = 0.01%/1000 hrs. 90% conf. D = 0.001%/1000 hrs. 90% conf. T = T Level A = Non-ER	<b>Case Size</b>	<b>Surge Test Option</b> A = 10 cycles, +25°C B = 10 cycles, -55°C & +85°C C = 10 cycles, -55°C & +85°C before Weibull Z = None required	<b>Packaging</b> Bulk = Standard TR = 7" T&R TR13 = 13" T&R W = Waffle  See page 5 for additional packaging options.

#### SPACE LEVEL OPTIONS TO SRC9000\*:

TAZ	H	227	*	006	C	□	L	@	9	^	++
<b>Type</b>	<b>Case Size</b>	<b>Capacitance Code</b> pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow)	<b>Capacitance Tolerance</b> M = ±20% K = ±10% J = ±5%	<b>Voltage Code</b> 004 = 4Vdc 006 = 6Vdc 010 = 10Vdc 015 = 15Vdc 020 = 20Vdc 025 = 25Vdc 035 = 35Vdc 050 = 50Vdc	<b>Standard or Low ESR Range</b> C = Std ESR L = Low ESR	<b>Packaging</b> B = Bulk R = 7" T&R S = 13" T&R W = Waffle  See page 5 for additional packaging options.	<b>Inspection Level</b> L = Group A	<b>Reliability Grade</b> Weibull: B = 0.1%/1000 hrs. 90% conf. C = 0.01%/1000 hrs. 90% conf. D = 0.001%/1000 hrs. 90% conf.	<b>Qualification Level</b> 9 = SRC9000	<b>Termination Finish</b> H = Solder Plated 0 = Fused Solder Plated 8 = Hot Solder Dipped 9 = Gold Plated	<b>Surge Test Option</b> 00 = 10 Cycles, -55°C & +85°C 45 = 10 cycles, -55°C & +85°C before Weibull

\*Contact factory for AVX SRC9000 Space Level SCD details.

### TECHNICAL SPECIFICATIONS

Technical Data:	Unless otherwise specified, all technical data relate to an ambient temperature of 25°C									
Capacitance Range:	0.33 µF to 330 µF									
Capacitance Tolerance:	±5%; ±10%; ±20%									
Rated Voltage: (V <sub>R</sub> )	≤85°C:	4	6	10	15	20	25	35	50	
Category Voltage: (V <sub>C</sub> )	125°C:	2.7	4	7	10	13	17	23	33	
Surge Voltage: (V <sub>S</sub> )	≤85°C:	5.2	8	13	20	26	32	46	65	
	125°C:	3.4	5	8	13	16	20	28	40	
Temperature Range:	-55°C to +125°C									

# TAZ Series



CWR19 - MIL-PRF-55365/11 Established Reliability, COTS-Plus & Space Level

RATING & PART NUMBER REFERENCE				Parametric Specifications by Rating per MIL-PRF-55365/11										Typical Ripple Data by Rating					
				Cap @ 120Hz @ 25°C	DC Rated Voltage @ +85°C	ESR @ 100kHz @ +25°C	DCL max			DF Max				Power Dissipation	25°C Ripple	85°C Ripple	125°C Ripple	25°C Ripple	85°C Ripple
CWR19 P/N	AVX MIL & COTS-Plus P/N	AVX SRC9000 P/N	Case	µF	V	Ohms	+25°C	+85°C	+125°C	+25°C	+85/125°C	-55°C	W	A	A	A	V	V	V
CWR19C^335^@A+D	TAZ A 335 * 004 C □ □ # 0 +	TAZ A 335 * 004 C □ □ L @ 9 +	A	3.3	4	12	1	10	12	6	8	8	0.050	0.06	0.06	0.03	0.77	0.70	0.31
CWR19C^475^@A+D	TAZ A 475 * 004 C □ □ # 0 +	TAZ A 475 * 004 C □ □ L @ 9 +	A	4.7	4	12	1	10	12	6	8	8	0.050	0.06	0.06	0.03	0.77	0.70	0.31
CWR19C^685^@A+D	TAZ A 685 * 004 C □ □ # 0 +	TAZ A 685 * 004 C □ □ L @ 9 +	A	6.8	4	12	1	10	12	6	8	8	0.050	0.06	0.06	0.03	0.77	0.70	0.31
CWR19C^106^@B+D	TAZ B 106 * 004 C □ □ # 0 +	TAZ B 106 * 004 C □ □ L @ 9 +	B	10	4	8	1	10	12	8	10	10	0.070	0.09	0.08	0.04	0.75	0.67	0.30
CWR19C^156^@B+D	TAZ B 156 * 004 C □ □ # 0 +	TAZ B 156 * 004 C □ □ L @ 9 +	B	15	4	8	1	10	12	8	10	10	0.070	0.09	0.08	0.04	0.75	0.67	0.30
CWR19C^226^@B+D	TAZ B 226 * 004 C □ □ # 0 +	TAZ B 226 * 004 C □ □ L @ 9 +	B	22	4	8	1	10	12	8	10	10	0.070	0.09	0.08	0.04	0.75	0.67	0.30
CWR19C^226^@D+D	TAZ D 226 * 004 C □ □ # 0 +	TAZ D 226 * 004 C □ □ L @ 9 +	D	22	4	4	1	10	12	8	10	12	0.080	0.14	0.13	0.06	0.57	0.51	0.23
CWR19C^336^@D+D	TAZ D 336 * 004 C □ □ # 0 +	TAZ D 336 * 004 C □ □ L @ 9 +	D	33	4	4	2	20	24	8	10	12	0.080	0.14	0.13	0.06	0.57	0.51	0.23
CWR19C^336^@E+D	TAZ E 336 * 004 C □ □ # 0 +	TAZ E 336 * 004 C □ □ L @ 9 +	E	33	4	3	2	20	24	8	10	12	0.090	0.17	0.16	0.07	0.52	0.47	0.21
CWR19C^476^@E+D	TAZ E 476 * 004 C □ □ # 0 +	TAZ E 476 * 004 C □ □ L @ 9 +	E	47	4	3	2	20	24	8	10	12	0.090	0.17	0.16	0.07	0.52	0.47	0.21
CWR19C^686^@E+D	TAZ E 686 * 004 C □ □ # 0 +	TAZ E 686 * 004 C □ □ L @ 9 +	E	68	4	3	3	30	36	8	10	12	0.090	0.17	0.16	0.07	0.52	0.47	0.21
CWR19C^107^@F+D	TAZ F 107 * 004 C □ □ # 0 +	TAZ F 107 * 004 C □ □ L @ 9 +	F	100	4	2	4	40	48	8	10	12	0.100	0.22	0.20	0.09	0.45	0.40	0.18
CWR19C^157^@G+D	TAZ G 157 * 004 C □ □ # 0 +	TAZ G 157 * 004 C □ □ L @ 9 +	G	150	4	1	6	60	72	10	12	12	0.125	0.35	0.32	0.14	0.35	0.32	0.14
CWR19C^227^@H+D	TAZ H 227 * 004 C □ □ # 0 +	TAZ H 227 * 004 C □ □ L @ 9 +	H	220	4	1	8	80	96	10	12	12	0.150	0.39	0.35	0.15	0.39	0.35	0.15
CWR19C^337^@H+D	TAZ H 337 * 004 C □ □ # 0 +	TAZ H 337 * 004 C □ □ L @ 9 +	H	330	4	0.9	10	100	120	10	12	12	0.150	0.41	0.37	0.16	0.37	0.33	0.15
CWR19C^335^@A+D	TAZ A 335 * 006 C □ □ # 0 +	TAZ A 335 * 006 C □ □ L @ 9 +	A	3.3	6	12	1	10	12	6	8	8	0.050	0.06	0.06	0.03	0.77	0.70	0.31
CWR19D^475^@A+D	TAZ A 475 * 006 C □ □ # 0 +	TAZ A 475 * 006 C □ □ L @ 9 +	A	4.7	6	12	1	10	12	6	8	8	0.050	0.06	0.06	0.03	0.77	0.70	0.31
CWR19D^685^@B+D	TAZ B 685 * 006 C □ □ # 0 +	TAZ B 685 * 006 C □ □ L @ 9 +	B	6.8	6	8	1	10	12	6	8	8	0.070	0.09	0.08	0.04	0.75	0.67	0.30
CWR19D^106^@B+D	TAZ B 106 * 006 C □ □ # 0 +	TAZ B 106 * 006 C □ □ L @ 9 +	B	10	6	8	1	10	12	6	8	8	0.070	0.09	0.08	0.04	0.75	0.67	0.30
CWR19D^156^@B+D	TAZ B 156 * 006 C □ □ # 0 +	TAZ B 156 * 006 C □ □ L @ 9 +	B	15	6	8	1	10	12	6	8	8	0.070	0.09	0.08	0.04	0.75	0.67	0.30
CWR19D^226^@D+D	TAZ D 226 * 006 C □ □ # 0 +	TAZ D 226 * 006 C □ □ L @ 9 +	D	22	6	5	1	10	12	6	8	10	0.080	0.13	0.11	0.05	0.63	0.57	0.25
CWR19D^336^@E+D	TAZ E 336 * 006 C □ □ # 0 +	TAZ E 336 * 006 C □ □ L @ 9 +	E	33	6	3	1	10	12	6	8	10	0.090	0.17	0.16	0.07	0.52	0.47	0.21
CWR19D^226^@E+D	TAZ E 226 * 006 C □ □ # 0 +	TAZ E 226 * 006 C □ □ L @ 9 +	E	22	6	3.5	2	20	24	8	10	12	0.090	0.16	0.14	0.06	0.56	0.51	0.22
CWR19D^336^@E+D	TAZ E 336 * 006 C □ □ # 0 +	TAZ E 336 * 006 C □ □ L @ 9 +	E	33	6	3.5	2	20	24	6	8	8	0.090	0.16	0.14	0.06	0.56	0.51	0.22
CWR19D^476^@F+D	TAZ F 476 * 006 C □ □ # 0 +	TAZ F 476 * 006 C □ □ L @ 9 +	F	47	6	3.5	3	30	36	8	10	12	0.100	0.17	0.15	0.07	0.59	0.53	0.24
CWR19D^686^@F+D	TAZ F 686 * 006 C □ □ # 0 +	TAZ F 686 * 006 C □ □ L @ 9 +	F	68	6	1.5	4	40	48	10	12	12	0.100	0.26	0.23	0.10	0.39	0.35	0.15
CWR19D^686^@G+D	TAZ G 686 * 006 C □ □ # 0 +	TAZ G 686 * 006 C □ □ L @ 9 +	G	68	6	1	4	40	48	10	12	12	0.125	0.35	0.32	0.14	0.35	0.32	0.14
CWR19D^107^@G+D	TAZ G 107 * 006 C □ □ # 0 +	TAZ G 107 * 006 C □ □ L @ 9 +	G	100	6	1.1	6	60	72	10	12	12	0.125	0.34	0.30	0.13	0.37	0.33	0.15
CWR19D^157^@G+D	TAZ G 157 * 006 C □ □ # 0 +	TAZ G 157 * 006 C □ □ L @ 9 +	G	150	6	1.1	10	100	120	10	12	12	0.125	0.34	0.30	0.13	0.37	0.33	0.15
CWR19D^227^@H+D	TAZ H 227 * 006 C □ □ # 0 +	TAZ H 227 * 006 C □ □ L @ 9 +	H	220	6	0.9	10	100	120	10	12	12	0.150	0.41	0.37	0.16	0.37	0.33	0.15
CWR19D^337^@H+D	TAZ H 337 * 006 C □ □ # 0 +	TAZ H 337 * 006 C □ □ L @ 9 +	H	330	6	0.9	20	200	240	10	12	12	0.150	0.41	0.37	0.16	0.37	0.33	0.15
CWR19F^335^@A+D	TAZ A 335 * 010 C □ □ # 0 +	TAZ A 335 * 010 C □ □ L @ 9 +	A	3.3	10	12	1	10	12	6	8	8	0.050	0.06	0.06	0.03	0.77	0.70	0.31
CWR19F^475^@B+D	TAZ B 475 * 010 C □ □ # 0 +	TAZ B 475 * 010 C □ □ L @ 9 +	B	4.7	10	8	1	10	12	6	8	8	0.070	0.09	0.08	0.04	0.75	0.67	0.30
CWR19F^685^@B+D	TAZ B 685 * 010 C □ □ # 0 +	TAZ B 685 * 010 C □ □ L @ 9 +	B	6.8	10	8	1	10	12	6	8	8	0.070	0.09	0.08	0.04	0.75	0.67	0.30
CWR19F^106^@B+D	TAZ B 106 * 010 C □ □ # 0 +	TAZ B 106 * 010 C □ □ L @ 9 +	B	10	10	8	1	10	12	6	8	10	0.070	0.09	0.08	0.04	0.75	0.67	0.30
CWR19F^475^@C+D	TAZ C 475 * 010 C □ □ # 0 +	TAZ C 475 * 010 C □ □ L @ 9 +	C	4.7	10	5.5	1	10	12	6	8	8	0.075	0.12	0.11	0.05	0.64	0.58	0.26
CWR19F^685^@C+D	TAZ C 685 * 010 C □ □ # 0 +	TAZ C 685 * 010 C □ □ L @ 9 +	C	6.8	10	5.5	1	10	12	6	8	8	0.075	0.12	0.11	0.05	0.64	0.58	0.26
CWR19F^106^@C+D	TAZ C 106 * 010 C □ □ # 0 +	TAZ C 106 * 010 C □ □ L @ 9 +	C	10	10	5.5	1	10	12	6	8	8	0.075	0.12	0.11	0.05	0.64	0.58	0.26
CWR19F^685^@D+D	TAZ D 685 * 010 C □ □ # 0 +	TAZ D 685 * 010 C □ □ L @ 9 +	D	6.8	10	5	1	10	12	6	8	8	0.080	0.13	0.11	0.05	0.63	0.57	0.25
CWR19F^106^@D+D	TAZ D 106 * 010 C □ □ # 0 +	TAZ D 106 * 010 C □ □ L @ 9 +	D	10	10	4	1	10	12	6	8	8	0.080	0.14	0.13	0.06	0.57	0.51	0.23
CWR19F^156^@D+D	TAZ D 156 * 010 C □ □ # 0 +	TAZ D 156 * 010 C □ □ L @ 9 +	D	15	10	5	2	20	24	6	8	8	0.080	0.13	0.11	0.05	0.63	0.57	0.25
CWR19F^106^@E+D	TAZ E 106 * 010 C □ □ # 0 +	TAZ E 106 * 010 C □ □ L @ 9 +	E	10	10	3.5	1	10	12	6	8	8	0.090	0.16	0.14	0.06	0.56	0.51	0.22
CWR19F^156^@E+D	TAZ E 156 * 010 C □ □ # 0 +	TAZ E 156 * 010 C □ □ L @ 9 +	E	15	10	3	2	20	24	8	10	10	0.090	0.17	0.16	0.07	0.52	0.47	0.21
CWR19F^226^@E+D	TAZ E 226 * 010 C □ □ # 0 +	TAZ E 226 * 010 C □ □ L @ 9 +	E	22	10	2	3	30	36	8	10	10	0.090	0.21	0.19	0.08	0.42	0.38	0.17
CWR19F^336^@F+D	TAZ F 336 * 010 C □ □ # 0 +	TAZ F 336 * 010 C □ □ L @ 9 +	F	33	10	1.5	3	30	36	8	10	10	0.100	0.26	0.23	0.10	0.39	0.35	0.15
CWR19F^476^@F+D	TAZ F 476 * 010 C □ □ # 0 +	TAZ F 476 * 010 C □ □ L @ 9 +	F	47	10	1.5	4	40	48	10	12	12	0.100	0.26	0.23	0.10	0.39	0.35	0.15
CWR19F^476^@G+D	TAZ G 476 * 010 C □ □ # 0 +	TAZ G 476 * 010 C □ □ L @ 9 +	G	47	10	1	4	40	48	10	12	12	0.125	0.35	0.32	0.14	0.35	0.32	0.14
CWR19F^686^@G+D	TAZ G 686 * 010 C □ □ # 0 +	TAZ G 686 * 010 C □ □ L @ 9 +	G	68	10	1.1	6	60	72	10	12	12	0.125	0.34	0.30	0.13	0.37	0.33	0.15
CWR19F^107^@G+D	TAZ G 107 * 010 C □ □ # 0 +	TAZ G 107 * 010 C □ □ L @ 9 +	G	100	10	1.1	10	100	120	10	12	12	0.125	0.34	0.30	0.13	0.37	0.33	0.15
CWR19F^157^@H+D	TAZ H 157 * 010 C □ □ # 0 +	TAZ H 157 * 010 C □ □ L @ 9 +	H	150	10	0.9	15	150	180	10	12	12	0.150	0.41	0.37	0.16	0.37	0.33	0.15
CWR19F^227^@H+D	TAZ H 227 * 010 C □ □ # 0 +	TAZ H 227 * 010 C □ □ L @ 9 +	H	220	10	0.9	20	200	240	10	12	12	0.150	0.41	0.37	0.16	0.37	0.33	0.15
CWR19F^157^@X+D	TAZ X 157 * 010 C □ □ # 0 +	TAZ X 157 * 010 C □ □ L @ 9 +	X	150	10	0.9	15	150	180	10	12	12	0.200	0.47	0.42	0.19	0.42	0.38	0.17

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5V RMS with a maximum DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes.

NOTE: AVX reserves the right to supply a higher voltage rating or tighter tolerance part

# TAZ Series

CWR19 - MIL-PRF-55365/11 Established Reliability, COTS-Plus & Space Level



RATING & PART NUMBER REFERENCE			Parametric Specifications by Rating per MIL-PRF-55365/11										Typical Ripple Data by Rating						
			Cap @ 120Hz µF @ 25°C	DC Rated Voltage V @ +85°C	ESR @ 100kHz Ohms @ +25°C	DCL max			DF Max			Power Dissipation W	25°C Ripple A (100kHz)	85°C Ripple A (100kHz)	125°C Ripple A (100kHz)	25°C Ripple V (100kHz)	85°C Ripple V (100kHz)	125°C Ripple V (100kHz)	
CWR19 P/N	AVX MIL & COTS-Plus P/N	AVX SRC9000 P/N	Case	+25°C	+85°C	+125°C	+25°C	+85/125°C	-55°C	(%)	(%)	(%)							
CWR19H105@A+D	TAZ A 105 * 015 C □ □ # @ 0 ++	TAZ A 105 * 015 C □ □ L @ 9 ++	A	1	15	15	1	10	12	6	8	8	0.050	0.06	0.05	0.02	0.87	0.78	0.35
CWR19H155@A+D	TAZ A 155 * 015 C □ □ # @ 0 ++	TAZ A 155 * 015 C □ □ L @ 9 ++	A	1.5	15	15	1	10	12	6	8	8	0.050	0.06	0.05	0.02	0.87	0.78	0.35
CWR19H225@A+D	TAZ A 225 * 015 C □ □ # @ 0 ++	TAZ A 225 * 015 C □ □ L @ 9 ++	A	2.2	15	15	1	10	12	6	8	8	0.050	0.06	0.05	0.02	0.87	0.78	0.35
CWR19H335@B+D	TAZ B 335 * 015 C □ □ # @ 0 ++	TAZ B 335 * 015 C □ □ L @ 9 ++	B	3.3	15	9	1	10	12	6	8	8	0.070	0.09	0.08	0.04	0.79	0.71	0.32
CWR19H475@B+D	TAZ B 475 * 015 C □ □ # @ 0 ++	TAZ B 475 * 015 C □ □ L @ 9 ++	B	4.7	15	5	1	10	12	6	8	8	0.070	0.12	0.11	0.05	0.59	0.53	0.24
CWR19H475@C+D	TAZ C 475 * 015 C □ □ # @ 0 ++	TAZ C 475 * 015 C □ □ L @ 9 ++	C	4.7	15	5.5	1	10	12	6	8	8	0.075	0.12	0.11	0.05	0.64	0.58	0.26
CWR19H475@D+D	TAZ D 475 * 015 C □ □ # @ 0 ++	TAZ D 475 * 015 C □ □ L @ 9 ++	D	4.7	15	6	1	10	12	6	8	8	0.080	0.12	0.10	0.05	0.69	0.62	0.28
CWR19H685@D+D	TAZ D 685 * 015 C □ □ # @ 0 ++	TAZ D 685 * 015 C □ □ L @ 9 ++	D	6.8	15	6	1	10	12	6	8	8	0.090	0.12	0.10	0.05	0.69	0.62	0.28
CWR19H106@D+D	TAZ D 106 * 015 C □ □ # @ 0 ++	TAZ D 106 * 015 C □ □ L @ 9 ++	D	10	15	6	2	20	24	6	8	8	0.090	0.12	0.10	0.05	0.69	0.62	0.28
CWR19H685@E+D	TAZ E 685 * 015 C □ □ # @ 0 ++	TAZ E 685 * 015 C □ □ L @ 9 ++	E	6.8	15	3	1	10	12	6	8	10	0.090	0.17	0.16	0.07	0.52	0.47	0.21
CWR19H106@E+D	TAZ E 106 * 015 C □ □ # @ 0 ++	TAZ E 106 * 015 C □ □ L @ 9 ++	E	10	15	4	2	20	24	6	8	8	0.090	0.15	0.14	0.06	0.60	0.54	0.24
CWR19H156@E+D	TAZ E 156 * 015 C □ □ # @ 0 ++	TAZ E 156 * 015 C □ □ L @ 9 ++	E	15	15	4	2	20	24	6	8	8	0.090	0.15	0.14	0.06	0.60	0.54	0.24
CWR19H156@F+D	TAZ F 156 * 015 C □ □ # @ 0 ++	TAZ F 156 * 015 C □ □ L @ 9 ++	F	15	15	3	2	20	24	8	10	10	0.100	0.18	0.16	0.07	0.55	0.49	0.22
CWR19H226@F+D	TAZ F 226 * 015 C □ □ # @ 0 ++	TAZ F 226 * 015 C □ □ L @ 9 ++	F	22	15	3	3	30	36	8	10	10	0.100	0.18	0.16	0.07	0.55	0.49	0.22
CWR19H336@F+D	TAZ F 336 * 015 C □ □ # @ 0 ++	TAZ F 336 * 015 C □ □ L @ 9 ++	F	33	15	3	5	60	60	6	8	8	0.100	0.18	0.16	0.07	0.55	0.49	0.22
CWR19H336@G+D	TAZ G 336 * 015 C □ □ # @ 0 ++	TAZ G 336 * 015 C □ □ L @ 9 ++	G	33	15	1.1	6	60	72	8	10	10	0.125	0.34	0.30	0.13	0.37	0.33	0.15
CWR19H476@G+D	TAZ G 476 * 015 C □ □ # @ 0 ++	TAZ G 476 * 015 C □ □ L @ 9 ++	G	47	15	1.1	10	100	120	8	10	10	0.125	0.34	0.30	0.13	0.37	0.33	0.15
CWR19H686@G+D	TAZ G 686 * 015 C □ □ # @ 0 ++	TAZ G 686 * 015 C □ □ L @ 9 ++	G	68	15	1.1	10	100	120	8	10	10	0.125	0.34	0.30	0.13	0.37	0.33	0.15
CWR19H476@H+D	TAZ H 476 * 015 C □ □ # @ 0 ++	TAZ H 476 * 015 C □ □ L @ 9 ++	H	47	15	0.9	10	100	120	8	10	10	0.150	0.41	0.37	0.16	0.37	0.33	0.15
CWR19H686@H+D	TAZ H 686 * 015 C □ □ # @ 0 ++	TAZ H 686 * 015 C □ □ L @ 9 ++	H	68	15	0.9	10	100	120	8	10	10	0.150	0.41	0.37	0.16	0.37	0.33	0.15
CWR19H107@H+D	TAZ H 107 * 015 C □ □ # @ 0 ++	TAZ H 107 * 015 C □ □ L @ 9 ++	H	100	15	0.9	15	150	180	10	12	12	0.150	0.41	0.37	0.16	0.37	0.33	0.15
CWR19J684@A+D	TAZ A 684 * 020 C □ □ # @ 0 ++	TAZ A 684 * 020 C □ □ L @ 9 ++	A	0.68	20	15	1	10	12	6	8	8	0.050	0.06	0.05	0.02	0.87	0.78	0.35
CWR19J105@A+D	TAZ A 105 * 020 C □ □ # @ 0 ++	TAZ A 105 * 020 C □ □ L @ 9 ++	A	1	20	15	1	10	12	6	8	8	0.050	0.06	0.05	0.02	0.87	0.78	0.35
CWR19J155@B+D	TAZ B 155 * 020 C □ □ # @ 0 ++	TAZ B 155 * 020 C □ □ L @ 9 ++	B	1.5	20	9	1	10	12	6	8	8	0.070	0.09	0.08	0.04	0.79	0.71	0.32
CWR19J225@B+D	TAZ B 225 * 020 C □ □ # @ 0 ++	TAZ B 225 * 020 C □ □ L @ 9 ++	B	2.2	20	9	1	10	12	6	8	8	0.070	0.09	0.08	0.04	0.79	0.71	0.32
CWR19J335@D+D	TAZ D 335 * 020 C □ □ # @ 0 ++	TAZ D 335 * 020 C □ □ L @ 9 ++	D	3.3	20	6	1	10	12	6	8	8	0.080	0.12	0.10	0.05	0.69	0.62	0.28
CWR19J475@E+D	TAZ E 475 * 020 C □ □ # @ 0 ++	TAZ E 475 * 020 C □ □ L @ 9 ++	E	4.7	20	6	1	10	12	6	8	8	0.090	0.12	0.11	0.05	0.73	0.66	0.29
CWR19J685@E+D	TAZ E 685 * 020 C □ □ # @ 0 ++	TAZ E 685 * 020 C □ □ L @ 9 ++	E	6.8	20	5	2	20	24	6	8	8	0.090	0.13	0.12	0.05	0.67	0.60	0.27
CWR19J106@E+D	TAZ E 106 * 020 C □ □ # @ 0 ++	TAZ E 106 * 020 C □ □ L @ 9 ++	E	10	20	5	2	20	24	6	8	8	0.090	0.13	0.12	0.05	0.67	0.60	0.27
CWR19J106@F+D	TAZ F 106 * 020 C □ □ # @ 0 ++	TAZ F 106 * 020 C □ □ L @ 9 ++	F	10	20	3	2	20	24	6	8	8	0.100	0.18	0.16	0.07	0.55	0.49	0.22
CWR19J156@F+D	TAZ F 156 * 020 C □ □ # @ 0 ++	TAZ F 156 * 020 C □ □ L @ 9 ++	F	15	20	3	3	30	36	6	8	8	0.100	0.18	0.16	0.07	0.55	0.49	0.22
CWR19J226@G+D	TAZ G 226 * 020 C □ □ # @ 0 ++	TAZ G 226 * 020 C □ □ L @ 9 ++	G	22	20	2.5	4	40	48	6	8	8	0.125	0.22	0.20	0.09	0.56	0.50	0.22
CWR19J336@H+D	TAZ H 336 * 020 C □ □ # @ 0 ++	TAZ H 336 * 020 C □ □ L @ 9 ++	H	33	20	0.9	6	60	72	8	10	10	0.150	0.41	0.37	0.16	0.37	0.33	0.15
CWR19J476@H+D	TAZ H 476 * 020 C □ □ # @ 0 ++	TAZ H 476 * 020 C □ □ L @ 9 ++	H	47	20	0.9	10	100	120	8	10	10	0.150	0.41	0.37	0.16	0.37	0.33	0.15
CWR19J476@X+D	TAZ X 476 * 020 C □ □ # @ 0 ++	TAZ X 476 * 020 C □ □ L @ 9 ++	X	47	20	0.9	10	100	120	8	10	10	0.200	0.47	0.42	0.19	0.42	0.38	0.17
CWR19K474@A+D	TAZ A 474 * 025 C □ □ # @ 0 ++	TAZ A 474 * 025 C □ □ L @ 9 ++	A	0.47	25	15	1	10	12	6	8	8	0.050	0.06	0.05	0.02	0.87	0.78	0.35
CWR19K105@B+D	TAZ B 105 * 025 C □ □ # @ 0 ++	TAZ B 105 * 025 C □ □ L @ 9 ++	B	1	25	10	1	10	12	6	8	8	0.070	0.08	0.08	0.03	0.84	0.75	0.33
CWR19K225@B+D	TAZ B 225 * 025 C □ □ # @ 0 ++	TAZ B 225 * 025 C □ □ L @ 9 ++	D	2.2	25	6	1	10	12	6	8	8	0.080	0.12	0.10	0.05	0.69	0.62	0.28
CWR19K335@E+D	TAZ E 335 * 025 C □ □ # @ 0 ++	TAZ E 335 * 025 C □ □ L @ 9 ++	E	3.3	25	4	1	10	12	6	8	8	0.090	0.15	0.14	0.06	0.60	0.54	0.24
CWR19K685@F+D	TAZ F 685 * 025 C □ □ # @ 0 ++	TAZ F 685 * 025 C □ □ L @ 9 ++	F	6.8	25	3	2	20	24	6	8	8	0.100	0.18	0.16	0.07	0.55	0.49	0.22
CWR19K156@G+D	TAZ G 156 * 025 C □ □ # @ 0 ++	TAZ G 156 * 025 C □ □ L @ 9 ++	G	15	25	1.4	4	40	48	6	8	8	0.125	0.30	0.27	0.12	0.42	0.38	0.17
CWR19K226@G+D	TAZ G 226 * 025 C □ □ # @ 0 ++	TAZ G 226 * 025 C □ □ L @ 9 ++	G	22	25	1.4	6	60	72	6	8	8	0.125	0.30	0.27	0.12	0.42	0.38	0.17
CWR19K226@H+D	TAZ H 226 * 025 C □ □ # @ 0 ++	TAZ H 226 * 025 C □ □ L @ 9 ++	H	22	25	0.9	6	60	72	6	8	8	0.150	0.41	0.37	0.16	0.37	0.33	0.15
CWR19K336@H+D	TAZ H 336 * 025 C □ □ # @ 0 ++	TAZ H 336 * 025 C □ □ L @ 9 ++	H	33	25	0.9	10	100	120	8	10	10	0.150	0.41	0.37	0.16	0.37	0.33	0.15
CWR19M334@A+D	TAZ A 334 * 035 C □ □ # @ 0 ++	TAZ A 334 * 035 C □ □ L @ 9 ++	A	0.33	35	22	1	10	12	6	8	8	0.050	0.05	0.04	0.02	1.05	0.94	0.42
CWR19M685@G+D	TAZ G 685 * 035 C □ □ # @ 0 ++	TAZ G 685 * 035 C □ □ L @ 9 ++	G	6.8	35	1.5	3	30	36	6	8	8	0.125	0.29	0.26	0.12	0.43	0.39	0.17
CWR19M106@H+D	TAZ H 106 * 035 C □ □ # @ 0 ++	TAZ H 106 * 035 C □ □ L @ 9 ++	H	10	35	0.9	4	40	48	8	10	10	0.150	0.41	0.37	0.16	0.37	0.33	0.15

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5V RMS with a maximum DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes.

**NOTE: AVX reserves the right to supply a higher voltage rating or tighter tolerance part in the same case size, to the same reliability standards.**






# TAZ Series



## CWR29 - MIL-PRF-55365/11 Established Reliability, COTS-Plus & Space Level

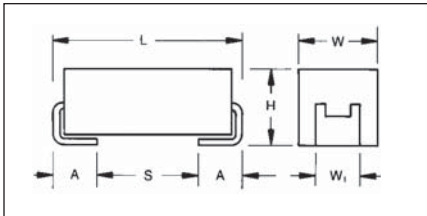

### MARKING

(White marking on black body)



**Polarity Stripe (+)**

**Capacitance Code  
Rated Voltage**

A low ESR version of CWR09 and CWR19 that is fully qualified to MIL-PRF-55365/11, the CWR29 series represents the most flexible of surface mount form factors and the optimum power handling for all filtering applications. It is offered in nine case sizes (the original A through H of CWR09 and adding the new X case size).

The molded body / compliant termination construction ensures no TCE mismatch with any substrate. This construction is compatible with a wide range of SMT board assembly processes including wave or reflow solder, conductive epoxy or compression bonding techniques. The parts also carry full polarity and capacitance / voltage marking.

The five smaller cases are characterized by their low profile construction, with the

A case being the world's smallest molded military tantalum chip.

The series is qualified to MIL-PRF-55365 Weibull "B", "C", "D" and "T" levels, with all surge options ("A", "B" & "C") available.

For Space Level applications, AVX SRC 9000 qualification is recommended (see ratings table for part number availability).

There are four termination finishes available: solder plated, fused solder plated, hot solder dipped and gold plated (these are "H", "K", "C" and "B" termination, respectively, per MIL-PRF-55365). In addition, the molding compound has been selected to meet the requirements of UL94V-0 (Flame Retardancy) and out-gassing requirements of NASA SP-R-0022A.

### CASE DIMENSIONS:

millimeters (inches)

Case Code	Length (L) ±0.38 (0.015)	Width (W) ±0.38 (0.015)	Height (H) ±0.38 (0.015)	Term. Width (W <sub>t</sub> )	Term. Length (A) ±0.13 (0.005)	S min	Typical Weight (g)
A	2.54 (0.100)	1.27 (0.050)	1.27 (0.050)	1.27±0.13 (0.050±0.005)	0.76 (0.030)	0.38 (0.015)	0.016
B	3.81 (0.150)	1.27 (0.050)	1.27 (0.050)	1.27±0.13 (0.050±0.005)	0.76 (0.030)	1.65 (0.065)	0.025
C	5.08 (0.200)	1.27 (0.050)	1.27 (0.050)	1.27±0.13 (0.050±0.005)	0.76 (0.030)	2.92 (0.115)	0.035
D	3.81 (0.150)	2.54 (0.100)	1.27 (0.050)	2.41+0.13/-0.25 (0.095+0.005/-0.010)	0.76 (0.030)	1.65 (0.065)	0.045
E	5.08 (0.200)	2.54 (0.100)	1.27 (0.050)	2.41+0.13/-0.25 (0.095+0.005/-0.010)	0.76 (0.030)	2.92 (0.115)	0.065
F	5.59 (0.220)	3.43 (0.135)	1.78 (0.070)	3.30±0.13 (0.130±0.005)	0.76 (0.030)	3.43 (0.135)	0.125
G	6.73 (0.265)	2.79 (0.110)	2.79 (0.110)	2.67±0.13 (0.105±0.005)	1.27 (0.050)	3.56 (0.140)	0.205
H	7.24 (0.285)	3.81 (0.150)	2.79 (0.110)	3.68+0.13/-0.51 (0.145+0.005/-0.020)	1.27 (0.050)	4.06 (0.160)	0.035
X	6.93 Max (0.273)	5.41 Max (0.213)	2.74 Max (0.108)	3.05±0.13 (0.120±0.005)	1.19 (0.047)	N/A	0.420

### CWR29-MIL-PRF 55365/11

### CAPACITANCE AND RATED VOLTAGE, V<sub>R</sub> (VOLTAGE CODE) RANGE (LETTER DENOTES CASE SIZE)

Capacitance		Rated voltage DC (V <sub>R</sub> ) at 85°C							
µF	Code	4V (C)	6V (D)	10V (F)	15V (H)	20V (J)	25V (K)	35V (M)	50V (N)
0.10	104								A
0.15	154								A
0.22	224							A	B
0.33	334						A	A	B
0.47	474					A	A	B	C
0.68	684				A	A/B	B	C	D
1.0	105			A	A	A/B	B/C	D	E
1.5	155		A		A/B	B/C	D	E	F
2.2	225	A		A/B	A/C	B/D	D/E		F
3.3	335	A	A/B	A/C	B/D	D/E	E	F	G
4.7	475	A/B	A/C	B/C/D	B/C/D/E	E	F	G	H
6.8	685	A/C	B/D	B/C/D/E	D/E	E/F	F/G	G/H	
10	106	B/D	B/E	B/C/D/E	D/E/F	E/F	G	H	
15	156	B/E	B/D/E	D/E/F	E/F	F/G	G/H		
22	226	B/D	D/E/F	E	F/G	G/H	G/H		
33	336	D/E/F	E	F/G	F/G/H	H	H		
47	476	E	F/G	F/G/H	G/H	H/X			
68	686	E/G	F/G/H	G	G/H				
100	107	F/H	G	G/H	H				
150	157	G	G	H/X					
220	227	H	H	H					
330	337	H	H						



### HOW TO ORDER

#### COTS-PLUS & MIL QPL (CWR29):

TAZ	H	227	*	006	C	□	#	@	0	^	++
<b>Type</b>	<b>Case Size</b>	<b>Capacitance Code</b> pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow)	<b>Capacitance Tolerance</b> M = ±20% K = ±10% J = ±5%	<b>Voltage Code</b> 004 = 4Vdc 006 = 6Vdc 010 = 10Vdc 015 = 15Vdc 020 = 20Vdc 025 = 25Vdc 035 = 35Vdc 050 = 50Vdc	<b>Standard or Low ESR Range</b> C = Std ESR L = Low ESR	<b>Packaging</b> B = Bulk R = 7" T&R S = 13" T&R W = Waffle  See page 5 for additional packaging options.	<b>Inspection Level</b> S = Std. Conformance L = Group A  M = MIL (JAN) CWR29	<b>Reliability Grade</b> Weibull: B = 0.1%/1000 hrs. 90% conf. C = 0.01%/1000 hrs. 90% conf. D = 0.001%/1000 hrs. 90% conf. T = T Level Z = Non-ER	<b>Qualification Level</b> 0 = N/A 9 = SRC9000	<b>Termination Finish</b> H = Solder Plated 0 = Fused Solder Plated 8 = Hot Solder Dipped 9 = Gold Plated 7 = Matte Sn (COTS-Plus only)	<b>Surge Test Option</b> 00 = None 23 = 10 Cycles, +25°C 24 = 10 Cycles, -55°C & +85°C 45 = 10 cycles, -55°C & +85°C before Weibull

#### CWR29 P/N CROSS REFERENCE:

CWR29	D	^	227	*	@	H	+	□
<b>Type</b>	<b>Voltage Code</b> C = 4Vdc D = 6Vdc F = 10Vdc H = 15Vdc J = 20Vdc K = 25Vdc M = 35Vdc N = 50Vdc	<b>Termination Finish</b> H = Solder Plated K = Solder Fused C = Hot Solder Dipped B = Gold Plated	<b>Capacitance Code</b> pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow)	<b>Capacitance Tolerance</b> M = ±20% K = ±10% J = ±5%	<b>Reliability Grade</b> Weibull: B = 0.1%/1000 hrs. 90% conf. C = 0.01%/1000 hrs. 90% conf. D = 0.001%/1000 hrs. 90% conf. T = T Level A = Non-ER	<b>Case Size</b>	<b>Surge Test Option</b> A = 10 cycles, +25°C B = 10 cycles, -55°C & +85°C C = 10 cycles, -55°C & +85°C before Weibull Z = None required	<b>Packaging</b> Bulk = Standard TR = 7" T&R WR = Waffle  See page 5 for additional packaging options.

#### SPACE LEVEL OPTIONS TO SRC9000\*:

TAZ	H	227	*	006	C	□	L	@	9	^	++
<b>Type</b>	<b>Case Size</b>	<b>Capacitance Code</b> pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow)	<b>Capacitance Tolerance</b> M = ±20% K = ±10% J = ±5%	<b>Voltage Code</b> 004 = 4Vdc 006 = 6Vdc 010 = 10Vdc 015 = 15Vdc 020 = 20Vdc 025 = 25Vdc 035 = 35Vdc 050 = 50Vdc	<b>Standard or Low ESR Range</b> C = Std ESR L = Low ESR	<b>Packaging</b> B = Bulk R = 7" T&R S = 13" T&R W = Waffle  See page 5 for additional packaging options.	<b>Inspection Level</b> L = Group A	<b>Reliability Grade</b> Weibull: B = 0.1%/1000 hrs. 90% conf. C = 0.01%/1000 hrs. 90% conf. D = 0.001%/1000 hrs. 90% conf.	<b>Qualification Level</b> 9 = SRC9000	<b>Termination Finish</b> H = Solder Plated 0 = Fused Solder Plated 8 = Hot Solder Dipped 9 = Gold Plated	<b>Surge Test Option</b> 00 = 10 Cycles, -55°C & +85°C 45 = 10 cycles, -55°C & +85°C before Weibull

\*Contact factory for AVX SRC9000 Space Level SCD details.

### TECHNICAL SPECIFICATIONS

Technical Data:	Unless otherwise specified, all technical data relate to an ambient temperature of 25°C									
Capacitance Range:	0.1 μF to 330 μF									
Capacitance Tolerance:	±5%; ±10%; ±20%									
Rated Voltage: (V <sub>R</sub> )	≤85°C:	4	6	10	15	20	25	35	50	
Category Voltage: (V <sub>C</sub> )	125°C:	2.7	4	7	10	13	17	23	33	
Surge Voltage: (V <sub>S</sub> )	≤85°C:	5.2	8	13	20	26	32	46	65	
	125°C:	3.4	5	8	13	16	20	28	40	
Temperature Range:	-55°C to +125°C									

# TAZ Series

CWR29 - MIL-PRF-55365/11 Established Reliability, COTS-Plus & Space Level



RATING & PART NUMBER REFERENCE				Parametric Specifications by Rating per MIL-PRF-55365/11									Typical Ripple Data by Rating						
CWR29 P/N	AVX MIL & COTS-Plus P/N	AVX SRC9000 P/N	Case	Cap @ 120Hz µF @ 25°C	DC Rated Voltage V @ +85°C	ESR @ 100kHz Ohms @ +25°C	DCL max			DF Max			Power Dissipation W	25°C Ripple A (100kHz)	85°C Ripple A (100kHz)	125°C Ripple A (100kHz)	25°C Ripple V (100kHz)	85°C Ripple V (100kHz)	125°C Ripple V (100kHz)
							+25°C (µA)	+85°C (µA)	+125°C (µA)	+25°C (%)	+85/125°C (%)	-55°C (%)							
CWR29C225@A+D	TAZ A 225 * 004 L □ # @ 0 ++	TAZ A 225 * 004 L □ L □ @ 9 ++	A	2.2	4	4	1	10	12	6	8	8	0.050	0.11	0.10	0.04	0.45	0.40	0.18
CWR29C235@A+D	TAZ A 335 * 004 L □ # @ 0 ++	TAZ A 335 * 004 L □ L □ @ 9 ++	A	3.3	4	6	1	10	12	6	8	8	0.050	0.09	0.08	0.04	0.55	0.49	0.22
CWR29C245@A+D	TAZ A 475 * 004 L □ # @ 0 ++	TAZ A 475 * 004 L □ L □ @ 9 ++	A	4.7	4	6	1	10	12	6	8	8	0.050	0.09	0.08	0.04	0.55	0.49	0.22
CWR29C245@B+D	TAZ B 475 * 004 L □ # @ 0 ++	TAZ B 475 * 004 L □ L □ @ 9 ++	B	4.7	4	3.2	1	10	12	6	8	8	0.070	0.15	0.13	0.06	0.47	0.43	0.19
CWR29C685@A+D	TAZ A 685 * 004 L □ # @ 0 ++	TAZ A 685 * 004 L □ L □ @ 9 ++	A	6.8	4	6	1	10	12	6	8	8	0.050	0.09	0.08	0.04	0.55	0.49	0.22
CWR29C685@C+D	TAZ C 685 * 004 L □ # @ 0 ++	TAZ C 685 * 004 L □ L □ @ 9 ++	C	6.8	4	2.2	1	10	12	6	8	8	0.075	0.18	0.17	0.07	0.41	0.37	0.16
CWR29C106@B+D	TAZ B 106 * 004 L □ # @ 0 ++	TAZ B 106 * 004 L □ L □ @ 9 ++	B	10	4	3.2	1	10	12	8	10	10	0.070	0.15	0.13	0.06	0.47	0.43	0.19
CWR29C106@D+D	TAZ D 106 * 004 L □ # @ 0 ++	TAZ D 106 * 004 L □ L □ @ 9 ++	D	10	4	1.3	1	10	12	8	8	10	0.080	0.25	0.22	0.10	0.32	0.29	0.13
CWR29C156@B+D	TAZ B 156 * 004 L □ # @ 0 ++	TAZ B 156 * 004 L □ L □ @ 9 ++	B	15	4	3.2	1	10	12	8	10	10	0.070	0.15	0.13	0.06	0.47	0.43	0.19
CWR29C156@E+D	TAZ E 156 * 004 L □ # @ 0 ++	TAZ E 156 * 004 L □ L □ @ 9 ++	E	15	4	1	1	10	12	8	10	12	0.090	0.30	0.27	0.12	0.30	0.27	0.12
CWR29C226@B+D	TAZ B 226 * 004 L □ # @ 0 ++	TAZ B 226 * 004 L □ L □ @ 9 ++	B	22	4	3.2	1	10	12	8	10	10	0.070	0.15	0.13	0.06	0.47	0.43	0.19
CWR29C226@D+D	TAZ D 226 * 004 L □ # @ 0 ++	TAZ D 226 * 004 L □ L □ @ 9 ++	D	22	4	1.3	1	10	12	8	10	12	0.080	0.25	0.22	0.10	0.32	0.29	0.13
CWR29C336@D+D	TAZ D 336 * 004 L □ # @ 0 ++	TAZ D 336 * 004 L □ L □ @ 9 ++	D	33	4	1.3	2	20	24	8	10	12	0.080	0.25	0.22	0.10	0.32	0.29	0.13
CWR29C336@E+D	TAZ E 336 * 004 L □ # @ 0 ++	TAZ E 336 * 004 L □ L □ @ 9 ++	E	33	4	0.9	2	20	24	8	10	12	0.090	0.32	0.28	0.13	0.28	0.26	0.11
CWR29C336@F+D	TAZ F 336 * 004 L □ # @ 0 ++	TAZ F 336 * 004 L □ L □ @ 9 ++	F	33	4	0.6	2	20	24	8	10	12	0.100	0.41	0.37	0.16	0.24	0.22	0.10
CWR29C476@E+D	TAZ E 476 * 004 L □ # @ 0 ++	TAZ E 476 * 004 L □ L □ @ 9 ++	E	47	4	0.9	2	20	24	8	10	12	0.090	0.32	0.28	0.13	0.28	0.26	0.11
CWR29C686@E+D	TAZ E 686 * 004 L □ # @ 0 ++	TAZ E 686 * 004 L □ L □ @ 9 ++	E	68	4	0.9	3	30	36	8	10	12	0.090	0.32	0.28	0.13	0.28	0.26	0.11
CWR29C686@G+D	TAZ G 686 * 004 L □ # @ 0 ++	TAZ G 686 * 004 L □ L □ @ 9 ++	G	68	4	0.275	3	30	36	10	12	12	0.125	0.67	0.61	0.27	0.19	0.17	0.07
CWR29C107@F+D	TAZ F 107 * 004 L □ # @ 0 ++	TAZ F 107 * 004 L □ L □ @ 9 ++	F	100	4	0.55	4	40	48	10	12	12	0.100	0.43	0.38	0.17	0.23	0.21	0.09
CWR29C107@H+D	TAZ H 107 * 004 L □ # @ 0 ++	TAZ H 107 * 004 L □ L □ @ 9 ++	H	100	4	0.18	4	40	48	10	12	12	0.150	0.91	0.82	0.37	0.16	0.15	0.07
CWR29C157@G+D	TAZ G 157 * 004 L □ # @ 0 ++	TAZ G 157 * 004 L □ L □ @ 9 ++	G	150	4	0.25	6	60	72	10	12	12	0.125	0.71	0.64	0.28	0.18	0.16	0.07
CWR29C227@H+D	TAZ H 227 * 004 L □ # @ 0 ++	TAZ H 227 * 004 L □ L □ @ 9 ++	H	220	4	0.2	8	80	96	10	12	12	0.150	0.87	0.78	0.35	0.17	0.16	0.07
CWR29C337@H+D	TAZ H 337 * 004 L □ # @ 0 ++	TAZ H 337 * 004 L □ L □ @ 9 ++	H	330	4	0.18	10	100	120	10	12	12	0.150	0.91	0.82	0.37	0.16	0.15	0.07
CWR29D155@A+D	TAZ A 155 * 006 L □ # @ 0 ++	TAZ A 155 * 006 L □ L □ @ 9 ++	A	1.5	6	4	1	10	12	6	8	8	0.050	0.11	0.10	0.04	0.45	0.40	0.18
CWR29D335@A+D	TAZ A 335 * 006 L □ # @ 0 ++	TAZ A 335 * 006 L □ L □ @ 9 ++	A	3.3	6	6	1	10	12	6	8	8	0.050	0.09	0.08	0.04	0.55	0.49	0.22
CWR29D335@B+D	TAZ B 335 * 006 L □ # @ 0 ++	TAZ B 335 * 006 L □ L □ @ 9 ++	B	3.3	6	3.2	1	10	12	6	8	8	0.070	0.15	0.13	0.06	0.47	0.43	0.19
CWR29D475@A+D	TAZ A 475 * 006 L □ # @ 0 ++	TAZ A 475 * 006 L □ L □ @ 9 ++	A	4.7	6	6	1	10	12	6	8	8	0.050	0.09	0.08	0.04	0.55	0.49	0.22
CWR29D475@C+D	TAZ C 475 * 006 L □ # @ 0 ++	TAZ C 475 * 006 L □ L □ @ 9 ++	C	4.7	6	2.2	1	10	12	6	8	8	0.075	0.18	0.17	0.07	0.41	0.37	0.16
CWR29D685@B+D	TAZ B 685 * 006 L □ # @ 0 ++	TAZ B 685 * 006 L □ L □ @ 9 ++	B	6.8	6	3.2	1	10	12	6	8	8	0.070	0.15	0.13	0.06	0.47	0.43	0.19
CWR29D685@D+D	TAZ D 685 * 006 L □ # @ 0 ++	TAZ D 685 * 006 L □ L □ @ 9 ++	D	6.8	6	1.5	1	10	12	6	8	8	0.080	0.23	0.21	0.09	0.35	0.31	0.14
CWR29D106@B+D	TAZ B 106 * 006 L □ # @ 0 ++	TAZ B 106 * 006 L □ L □ @ 9 ++	B	10	6	3.2	1	10	12	6	8	8	0.070	0.15	0.13	0.06	0.47	0.43	0.19
CWR29D106@E+D	TAZ E 106 * 006 L □ # @ 0 ++	TAZ E 106 * 006 L □ L □ @ 9 ++	E	10	6	1	1	10	12	8	10	12	0.090	0.30	0.27	0.12	0.30	0.27	0.12
CWR29D156@B+D	TAZ B 156 * 006 L □ # @ 0 ++	TAZ B 156 * 006 L □ L □ @ 9 ++	B	15	6	3.2	1	10	12	8	10	10	0.070	0.15	0.13	0.06	0.47	0.43	0.19
CWR29D156@D+D	TAZ D 156 * 006 L □ # @ 0 ++	TAZ D 156 * 006 L □ L □ @ 9 ++	D	15	6	1.7	1	10	12	8	10	12	0.080	0.22	0.20	0.09	0.37	0.33	0.15
CWR29D156@E+D	TAZ E 156 * 006 L □ # @ 0 ++	TAZ E 156 * 006 L □ L □ @ 9 ++	E	15	6	0.9	1	10	12	8	10	12	0.090	0.32	0.28	0.13	0.28	0.26	0.11
CWR29D226@D+D	TAZ D 226 * 006 L □ # @ 0 ++	TAZ D 226 * 006 L □ L □ @ 9 ++	D	22	6	1.7	1	10	12	6	8	8	0.080	0.22	0.20	0.09	0.37	0.33	0.15
CWR29D226@E+D	TAZ E 226 * 006 L □ # @ 0 ++	TAZ E 226 * 006 L □ L □ @ 9 ++	E	22	6	1	2	20	24	8	10	12	0.090	0.30	0.27	0.12	0.30	0.27	0.12
CWR29D226@F+D	TAZ F 226 * 006 L □ # @ 0 ++	TAZ F 226 * 006 L □ L □ @ 9 ++	F	22	6	0.6	2	20	24	8	10	12	0.100	0.41	0.37	0.16	0.24	0.22	0.10
CWR29D336@E+D	TAZ E 336 * 006 L □ # @ 0 ++	TAZ E 336 * 006 L □ L □ @ 9 ++	E	33	6	1	2	20	24	8	10	12	0.090	0.30	0.27	0.12	0.30	0.27	0.12
CWR29D476@F+D	TAZ F 476 * 006 L □ # @ 0 ++	TAZ F 476 * 006 L □ L □ @ 9 ++	F	47	6	1	3	30	36	8	10	12	0.100	0.32	0.28	0.13	0.32	0.28	0.13
CWR29D476@G+D	TAZ G 476 * 006 L □ # @ 0 ++	TAZ G 476 * 006 L □ L □ @ 9 ++	G	47	6	0.275	3	30	36	10	12	12	0.125	0.67	0.61	0.27	0.19	0.17	0.07
CWR29D686@F+D	TAZ F 686 * 006 L □ # @ 0 ++	TAZ F 686 * 006 L □ L □ @ 9 ++	F	68	6	0.4	4	40	48	10	12	12	0.100	0.50	0.45	0.20	0.20	0.18	0.08
CWR29D686@G+D	TAZ G 686 * 006 L □ # @ 0 ++	TAZ G 686 * 006 L □ L □ @ 9 ++	G	68	6	0.25	4	40	48	10	12	12	0.125	0.71	0.64	0.28	0.18	0.16	0.07
CWR29D686@H+D	TAZ H 686 * 006 L □ # @ 0 ++	TAZ H 686 * 006 L □ L □ @ 9 ++	H	68	6	0.18	4	40	48	10	12	12	0.150	0.91	0.82	0.37	0.16	0.15	0.07
CWR29D107@G+D	TAZ G 107 * 006 L □ # @ 0 ++	TAZ G 107 * 006 L □ L □ @ 9 ++	G	100	6	0.275	6	60	72	10	12	12	0.125	0.67	0.61	0.27	0.19	0.17	0.07
CWR29D157@G+D	TAZ G 157 * 006 L □ # @ 0 ++	TAZ G 157 * 006 L □ L □ @ 9 ++	G	150	6	0.275	10	100	120	10	12	12	0.125	0.67	0.61	0.27	0.19	0.17	0.07
CWR29D227@H+D	TAZ H 227 * 006 L □ # @ 0 ++	TAZ H 227 * 006 L □ L □ @ 9 ++	H	220	6	0.18	10	100	120	10	12	12	0.150	0.91	0.82	0.37	0.16	0.15	0.07
CWR29D337@H+D	TAZ H 337 * 006 L □ # @ 0 ++	TAZ H 337 * 006 L □ L □ @ 9 ++	H	330	6	0.18	20	200	240	10	12	12	0.150	0.91	0.82	0.37	0.16	0.15	0.07
CWR29F105@A+D	TAZ A 105 * 010 L □ # @ 0 ++	TAZ A 105 * 010 L □ L □ @ 9 ++	A	1	10	5	1	10	12	6	8	8	0.050	0.10	0.09	0.04	0.50	0.45	0.20
CWR29F225@B+D	TAZ B 225 * 010 L □ # @ 0 ++	TAZ B 225 * 010 L □ L □ @ 9 ++	B	2.2	10	6	1	10	12	6	8	8	0.050	0.09	0.08	0.04	0.55	0.49	0.22
CWR29F335@A+D	TAZ A 335 * 010 L □ # @ 0 ++	TAZ A 335 * 010 L □ L □ @ 9 ++	A	3.3	10	6	1	10	12	6	8	8	0.070	0.15	0.13	0.06	0.47	0.43	0.19
CWR29F335@C+D	TAZ C 335 * 010 L □ # @ 0 ++	TAZ C 335 * 010 L □ L □ @ 9 ++	C	3.3	10	2.2	1	10	12	6	8	8	0.075	0.18	0.17	0.07	0.41	0.37	0.16
CWR29F475@B+D	TAZ B 475 * 010 L □ # @ 0 ++	TAZ B 475 * 010 L □ L □ @ 9 ++	B	4.7	10	3.2	1	10	12	6	8	8	0.070	0.15	0.13				

# TAZ Series

## CWR29 - MIL-PRF-55365/11 Established Reliability, COTS-Plus & Space Level



RATING & PART NUMBER REFERENCE				Parametric Specifications by Rating per MIL-PRF-55365/11											Typical Ripple Data by Rating				
CWR29 P/N	AVX MIL & COTS-Plus P/N	AVX SRC9000 P/N	Case	Cap @ 120Hz µF @ 25°C	DC Rated Voltage V @ +85°C	ESR @ 100kHz Ohms @ +25°C	DCL max			DF Max		Power Dissipation W	Ripple						
							+25°C (µA)	+85°C (µA)	+125°C (µA)	+25°C (%)	+85/125°C (%)		25°C A (100kHz)	85°C Ripple A (100kHz)	125°C Ripple A (100kHz)	25°C Ripple V (100kHz)	85°C Ripple V (100kHz)	125°C Ripple V (100kHz)	
CWR29F475@D+D	TAZ D 475 * 010 L □ # @ 0 + +	TAZ D 475 * 010 LL @ 9 + +	D	4.7	10	1.5	1	10	12	6	8	8	0.090	0.23	0.21	0.09	0.35	0.31	0.14
CWR29F685@B+D	TAZ B 685 * 010 L □ # @ 0 + +	TAZ B 685 * 010 LL @ 9 + +	B	6.8	10	3.2	1	10	12	6	8	8	0.070	0.15	0.13	0.06	0.47	0.43	0.19
CWR29F685@C+D	TAZ C 685 * 010 L □ # @ 0 + +	TAZ C 685 * 010 LL @ 9 + +	C	6.8	10	2.2	1	10	12	6	8	8	0.075	0.18	0.17	0.07	0.41	0.37	0.16
CWR29F685@D+D	TAZ D 685 * 010 L □ # @ 0 + +	TAZ D 685 * 010 LL @ 9 + +	D	6.8	10	1.7	1	10	12	6	8	8	0.090	0.22	0.20	0.09	0.37	0.33	0.15
CWR29F685@E+D	TAZ E 685 * 010 L □ # @ 0 + +	TAZ E 685 * 010 LL @ 9 + +	E	6.8	10	1	1	10	12	6	8	8	0.090	0.30	0.27	0.12	0.30	0.27	0.12
CWR29F106@B+D	TAZ B 106 * 010 L □ # @ 0 + +	TAZ B 106 * 010 LL @ 9 + +	B	10	10	3.2	1	10	12	6	8	10	0.070	0.15	0.13	0.06	0.47	0.43	0.19
CWR29F106@C+D	TAZ C 106 * 010 L □ # @ 0 + +	TAZ C 106 * 010 LL @ 9 + +	C	10	10	2.2	1	10	12	6	8	8	0.075	0.18	0.17	0.07	0.41	0.37	0.16
CWR29F106@D+D	TAZ D 106 * 010 L □ # @ 0 + +	TAZ D 106 * 010 LL @ 9 + +	D	10	10	1.3	1	10	12	6	8	8	0.090	0.25	0.22	0.10	0.32	0.29	0.13
CWR29F106@E+D	TAZ E 106 * 010 L □ # @ 0 + +	TAZ E 106 * 010 LL @ 9 + +	E	10	10	1	1	10	12	6	8	8	0.090	0.30	0.27	0.12	0.30	0.27	0.12
CWR29F156@D+D	TAZ D 156 * 010 L □ # @ 0 + +	TAZ D 156 * 010 LL @ 9 + +	D	15	10	1.7	2	20	24	6	8	8	0.090	0.22	0.20	0.09	0.37	0.33	0.15
CWR29F156@E+D	TAZ E 156 * 010 L □ # @ 0 + +	TAZ E 156 * 010 LL @ 9 + +	E	15	10	0.9	2	20	24	8	10	10	0.090	0.32	0.28	0.13	0.28	0.26	0.11
CWR29F226@F+D	TAZ F 226 * 010 L □ # @ 0 + +	TAZ F 226 * 010 LL @ 9 + +	F	15	10	0.7	2	20	24	8	10	10	0.100	0.38	0.34	0.15	0.26	0.24	0.11
CWR29F226@G+D	TAZ G 226 * 010 L □ # @ 0 + +	TAZ G 226 * 010 LL @ 9 + +	E	22	10	0.6	3	30	36	8	10	10	0.090	0.39	0.35	0.15	0.23	0.21	0.09
CWR29F336@F+D	TAZ F 336 * 010 L □ # @ 0 + +	TAZ F 336 * 010 LL @ 9 + +	F	33	10	0.4	3	30	36	8	10	10	0.100	0.50	0.45	0.20	0.20	0.18	0.08
CWR29F336@G+D	TAZ G 336 * 010 L □ # @ 0 + +	TAZ G 336 * 010 LL @ 9 + +	G	33	10	0.275	3	30	36	10	12	12	0.125	0.67	0.61	0.27	0.19	0.17	0.07
CWR29F476@F+D	TAZ F 476 * 010 L □ # @ 0 + +	TAZ F 476 * 010 LL @ 9 + +	F	47	10	0.4	4	40	48	10	12	12	0.100	0.50	0.45	0.20	0.20	0.18	0.08
CWR29F476@G+D	TAZ G 476 * 010 L □ # @ 0 + +	TAZ G 476 * 010 LL @ 9 + +	G	47	10	0.25	4	40	48	10	12	12	0.125	0.71	0.64	0.28	0.18	0.16	0.07
CWR29F476@H+D	TAZ H 476 * 010 L □ # @ 0 + +	TAZ H 476 * 010 LL @ 9 + +	H	47	10	0.18	5	50	60	10	12	12	0.150	0.91	0.82	0.37	0.16	0.15	0.07
CWR29F686@G+D	TAZ G 686 * 010 L □ # @ 0 + +	TAZ G 686 * 010 LL @ 9 + +	G	68	10	0.275	6	60	72	10	12	12	0.125	0.67	0.61	0.27	0.19	0.17	0.07
CWR29F107@G+D	TAZ G 107 * 010 L □ # @ 0 + +	TAZ G 107 * 010 LL @ 9 + +	G	100	10	0.275	10	100	120	10	12	12	0.125	0.67	0.61	0.27	0.19	0.17	0.07
CWR29F107@H+D	TAZ H 107 * 010 L □ # @ 0 + +	TAZ H 107 * 010 LL @ 9 + +	H	100	10	0.18	10	100	120	10	12	12	0.150	0.91	0.82	0.37	0.16	0.15	0.07
CWR29F157@H+D	TAZ H 157 * 010 L □ # @ 0 + +	TAZ H 157 * 010 LL @ 9 + +	H	150	10	0.18	15	150	180	10	12	12	0.150	0.91	0.82	0.37	0.16	0.15	0.07
CWR29F157@X+D	TAZ X 157 * 010 L □ # @ 0 + +	TAZ X 157 * 010 LL @ 9 + +	X	150	10	0.068	15	150	180	10	12	12	0.200	1.75	1.58	0.70	0.11	0.10	0.05
CWR29F227@H+D	TAZ H 227 * 010 L □ # @ 0 + +	TAZ H 227 * 010 LL @ 9 + +	H	220	10	0.16	20	200	240	10	12	12	0.150	0.91	0.82	0.37	0.18	0.15	0.07
CWR29H684@A+D	TAZ A 684 * 015 L □ # @ 0 + +	TAZ A 684 * 015 LL @ 9 + +	A	0.68	15	6	1	10	12	6	8	8	0.050	0.09	0.08	0.04	0.55	0.49	0.22
CWR29H105@A+D	TAZ A 105 * 015 L □ # @ 0 + +	TAZ A 105 * 015 LL @ 9 + +	A	1	15	7.5	1	10	12	6	8	8	0.050	0.08	0.07	0.03	0.61	0.55	0.24
CWR29H155@A+D	TAZ A 155 * 015 L □ # @ 0 + +	TAZ A 155 * 015 LL @ 9 + +	A	1.5	15	7.5	1	10	12	6	8	8	0.050	0.08	0.07	0.03	0.61	0.55	0.24
CWR29H155@B+D	TAZ B 155 * 015 L □ # @ 0 + +	TAZ B 155 * 015 LL @ 9 + +	B	1.5	15	3.2	1	10	12	6	8	8	0.070	0.15	0.13	0.06	0.47	0.43	0.19
CWR29H225@A+D	TAZ A 225 * 015 L □ # @ 0 + +	TAZ A 225 * 015 LL @ 9 + +	A	2.2	15	7.5	1	10	12	6	8	8	0.050	0.08	0.07	0.03	0.61	0.55	0.24
CWR29H225@C+D	TAZ C 225 * 015 L □ # @ 0 + +	TAZ C 225 * 015 LL @ 9 + +	C	2.2	15	2.2	1	10	12	6	8	8	0.075	0.18	0.17	0.07	0.41	0.37	0.16
CWR29H335@B+D	TAZ B 335 * 015 L □ # @ 0 + +	TAZ B 335 * 015 LL @ 9 + +	B	3.3	15	3.6	1	10	12	6	8	8	0.070	0.14	0.13	0.06	0.50	0.45	0.20
CWR29H335@D+D	TAZ D 335 * 015 L □ # @ 0 + +	TAZ D 335 * 015 LL @ 9 + +	D	3.3	15	1.7	1	10	12	6	8	8	0.090	0.22	0.20	0.09	0.37	0.33	0.15
CWR29H475@B+D	TAZ B 475 * 015 L □ # @ 0 + +	TAZ B 475 * 015 LL @ 9 + +	B	4.7	15	2	1	10	12	6	8	8	0.070	0.19	0.17	0.07	0.37	0.34	0.15
CWR29H475@C+D	TAZ C 475 * 015 L □ # @ 0 + +	TAZ C 475 * 015 LL @ 9 + +	C	4.7	15	2.2	1	10	12	6	8	8	0.075	0.18	0.17	0.07	0.41	0.37	0.16
CWR29H475@D+D	TAZ D 475 * 015 L □ # @ 0 + +	TAZ D 475 * 015 LL @ 9 + +	D	4.7	15	2	1	10	12	6	8	8	0.090	0.20	0.18	0.08	0.40	0.36	0.16
CWR29H475@E+D	TAZ E 475 * 015 L □ # @ 0 + +	TAZ E 475 * 015 LL @ 9 + +	E	4.7	15	1.2	1	10	12	6	8	8	0.090	0.27	0.25	0.11	0.33	0.30	0.13
CWR29H685@D+D	TAZ D 685 * 015 L □ # @ 0 + +	TAZ D 685 * 015 LL @ 9 + +	D	6.8	15	2	1	10	12	6	8	8	0.090	0.20	0.18	0.08	0.40	0.36	0.16
CWR29H685@E+D	TAZ E 685 * 015 L □ # @ 0 + +	TAZ E 685 * 015 LL @ 9 + +	E	6.8	15	0.9	1	10	12	6	8	10	0.090	0.32	0.28	0.13	0.28	0.26	0.11
CWR29H106@D+D	TAZ D 106 * 015 L □ # @ 0 + +	TAZ D 106 * 015 LL @ 9 + +	D	10	15	2	2	20	24	6	8	8	0.090	0.20	0.18	0.08	0.40	0.36	0.16
CWR29H106@E+D	TAZ E 106 * 015 L □ # @ 0 + +	TAZ E 106 * 015 LL @ 9 + +	E	10	15	1.2	2	20	24	6	8	8	0.090	0.27	0.25	0.11	0.33	0.30	0.13
CWR29H106@F+D	TAZ F 106 * 015 L □ # @ 0 + +	TAZ F 106 * 015 LL @ 9 + +	F	10	15	0.687	2	20	24	6	8	8	0.100	0.39	0.35	0.15	0.26	0.23	0.10
CWR29H156@E+D	TAZ E 156 * 015 L □ # @ 0 + +	TAZ E 156 * 015 LL @ 9 + +	E	15	15	1.2	2	20	24	6	8	8	0.090	0.27	0.25	0.11	0.33	0.30	0.13
CWR29H156@F+D	TAZ F 156 * 015 L □ # @ 0 + +	TAZ F 156 * 015 LL @ 9 + +	F	15	15	0.8	2	20	24	8	10	10	0.100	0.35	0.32	0.14	0.28	0.25	0.11
CWR29H226@F+D	TAZ F 226 * 015 L □ # @ 0 + +	TAZ F 226 * 015 LL @ 9 + +	F	22	15	0.8	3	30	36	8	10	10	0.100	0.35	0.32	0.14	0.28	0.25	0.11
CWR29H226@G+D	TAZ G 226 * 015 L □ # @ 0 + +	TAZ G 226 * 015 LL @ 9 + +	G	22	15	0.275	4	40	48	6	8	8	0.125	0.67	0.61	0.27	0.19	0.17	0.07
CWR29H336@F+D	TAZ F 336 * 015 L □ # @ 0 + +	TAZ F 336 * 015 LL @ 9 + +	F	33	15	0.8	5	50	60	6	8	8	0.100	0.35	0.32	0.14	0.28	0.25	0.11
CWR29H336@G+D	TAZ G 336 * 015 L □ # @ 0 + +	TAZ G 336 * 015 LL @ 9 + +	G	33	15	0.275	6	60	72	8	10	10	0.125	0.67	0.61	0.27	0.19	0.17	0.07
CWR29H336@H+D	TAZ H 336 * 015 L □ # @ 0 + +	TAZ H 336 * 015 LL @ 9 + +	H	33	15	0.18	5	50	60	8	10	10	0.150	0.91	0.82	0.37	0.16	0.15	0.07
CWR29H476@G+D	TAZ G 476 * 015 L □ # @ 0 + +	TAZ G 476 * 015 LL @ 9 + +	G	47	15	0.275	10	100	120	8	10	10	0.125	0.67	0.61	0.27	0.19	0.17	0.07
CWR29H476@H+D	TAZ H 476 * 015 L □ # @ 0 + +	TAZ H 476 * 015 LL @ 9 + +	H	47	15	0.18	10	100	120	8	10	10	0.150	0.91	0.82	0.37	0.16	0.15	0.07
CWR29H686@G+D	TAZ G 686 * 015 L □ # @ 0 + +	TAZ G 686 * 015 LL @ 9 + +	G	68	15	0.275	10	100	120	8	10	10	0.125	0.67	0.61	0.27	0.19	0.17	0.07
CWR29H686@H+D	TAZ H 686 * 015 L □ # @ 0 + +	TAZ H 686 * 015 LL @ 9 + +	H	68	15	0.18	10	100	120	8	10	10	0.150	0.91	0.82	0.37	0.16	0.15	0.07
CWR29H107@H+D	TAZ H 107 * 015 L □ # @ 0 + +	TAZ H 107 * 015 LL @ 9 + +	H	100	15	0.18	15	150	180	10	12	12	0.150	0.91	0.82	0.37	0.16	0.15	0.07
CWR29J474@A+D	TAZ A 474 * 020 L □ # @ 0 + +	TAZ A 474 * 020 LL @ 9 + +	A	0.47	20	7.5	1	10	12	8	8	10	0.050	0.08	0.07	0.03	0.61	0.55	0.24
CWR29J684@A+D	TAZ A 684 * 020 L □ # @ 0 + +	TAZ A 684 * 020 LL @ 9 + +	A	0.68	20	7.5	1	10	12	6	8	8	0.050	0.08	0.07	0.03	0.61	0.55	0.24

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5V RMS with a maximum DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes.

NOTE: AVX reserves the right to supply a higher voltage rating or tighter tolerance part in the same case size, to the same reliability standards.



# TAZ Series



## CWR29 - MIL-PRF-55365/11 Established Reliability, COTS-Plus & Space Level

RATING & PART NUMBER REFERENCE				Parametric Specifications by Rating per MIL-PRF-55365/11								Typical Ripple Data by Rating							
				Cap @ 120Hz µF @ 25°C	DC Rated Voltage V @ +85°C	ESR @ 100kHz Ohms @ +25°C	DCL max (µA)			DF Max (%)		Power Dissipation W	25°C Ripple A (100kHz)	85°C Ripple A (100kHz)	125°C Ripple A (100kHz)	25°C Ripple V (100kHz)	85°C Ripple V (100kHz)	125°C Ripple V (100kHz)	
CWR29 P/N	AVX MIL & COTS-Plus P/N	AVX SRC9000 P/N	Case	Cap @ 120Hz µF @ 25°C	DC Rated Voltage V @ +85°C	ESR @ 100kHz Ohms @ +25°C	+25°C (µA)	+85°C (µA)	+125°C (µA)	+25°C (%)	+85/125°C (%)	-55°C (%)	Power Dissipation W	25°C Ripple A (100kHz)	85°C Ripple A (100kHz)	125°C Ripple A (100kHz)	25°C Ripple V (100kHz)	85°C Ripple V (100kHz)	125°C Ripple V (100kHz)
CWR29J*684*0B+□	TAZ B 684 * 020 L □ # @ 0 A ++	TAZ B 684 * 020 LL @ 9 A ++	B	0.68	20	5.6	1	10	12	6	8	8	0.070	0.11	0.10	0.03	0.63	0.56	0.25
CWR29J*105*0A+□	TAZ A 105 * 020 L □ # @ 0 A ++	TAZ A 105 * 020 LL @ 9 A ++	A	1	20	7.5	1	10	12	6	8	8	0.050	0.08	0.07	0.03	0.61	0.55	0.24
CWR29J*105*0B+□	TAZ B 105 * 020 L □ # @ 0 A ++	TAZ B 105 * 020 LL @ 9 A ++	B	1	20	4.8	1	10	12	6	8	8	0.070	0.12	0.11	0.05	0.58	0.52	0.23
CWR29J*155*0B+□	TAZ B 155 * 020 L □ # @ 0 A ++	TAZ B 155 * 020 LL @ 9 A ++	B	1.5	20	3.6	1	10	12	6	8	8	0.070	0.14	0.13	0.06	0.50	0.45	0.20
CWR29J*225*0C+□	TAZ C 225 * 020 L □ # @ 0 A ++	TAZ C 225 * 020 LL @ 9 A ++	C	2.2	20	2.4	1	10	12	6	8	8	0.075	0.18	0.16	0.07	0.42	0.38	0.17
CWR29J*225*0E+□	TAZ B 225 * 020 L □ # @ 0 A ++	TAZ B 225 * 020 LL @ 9 A ++	B	2.2	20	3.6	1	10	12	6	8	8	0.070	0.14	0.13	0.06	0.50	0.45	0.20
CWR29J*225*0D+□	TAZ D 225 * 020 L □ # @ 0 A ++	TAZ D 225 * 020 LL @ 9 A ++	D	2.2	20	1.7	1	10	12	6	8	8	0.080	0.22	0.20	0.09	0.37	0.33	0.15
CWR29J*335*0D+□	TAZ D 335 * 020 L □ # @ 0 A ++	TAZ D 335 * 020 LL @ 9 A ++	D	3.3	20	2	1	10	12	6	8	8	0.090	0.20	0.18	0.08	0.40	0.36	0.16
CWR29J*335*0E+□	TAZ E 335 * 020 L □ # @ 0 A ++	TAZ E 335 * 020 LL @ 9 A ++	E	3.3	20	1.2	1	10	12	6	8	8	0.090	0.27	0.25	0.11	0.33	0.30	0.13
CWR29J*475*0E+□	TAZ E 475 * 020 L □ # @ 0 A ++	TAZ E 475 * 020 LL @ 9 A ++	E	4.7	20	1.7	1	10	12	6	8	8	0.090	0.23	0.21	0.09	0.39	0.35	0.16
CWR29J*685*0E+□	TAZ E 685 * 020 L □ # @ 0 A ++	TAZ E 685 * 020 LL @ 9 A ++	E	6.8	20	1.5	2	20	24	6	8	8	0.090	0.24	0.22	0.10	0.37	0.33	0.15
CWR29J*685*0F+□	TAZ F 685 * 020 L □ # @ 0 A ++	TAZ F 685 * 020 LL @ 9 A ++	F	6.8	20	0.7	2	20	24	6	8	8	0.100	0.38	0.34	0.15	0.26	0.24	0.11
CWR29J*106*0E+□	TAZ E 106 * 020 L □ # @ 0 A ++	TAZ E 106 * 020 LL @ 9 A ++	E	10	20	1.5	2	20	24	6	8	8	0.090	0.24	0.22	0.10	0.37	0.33	0.15
CWR29J*106*0F+□	TAZ F 106 * 020 L □ # @ 0 A ++	TAZ F 106 * 020 LL @ 9 A ++	F	10	20	0.8	2	20	24	6	8	8	0.100	0.35	0.32	0.14	0.28	0.25	0.11
CWR29J*156*0F+□	TAZ F 156 * 020 L □ # @ 0 A ++	TAZ F 156 * 020 LL @ 9 A ++	F	15	20	0.8	3	30	36	6	8	8	0.100	0.35	0.32	0.14	0.28	0.25	0.11
CWR29J*156*0G+□	TAZ G 156 * 020 L □ # @ 0 A ++	TAZ G 156 * 020 LL @ 9 A ++	G	15	20	0.275	3	30	36	6	8	8	0.125	0.67	0.61	0.27	0.19	0.17	0.07
CWR29J*226*0G+□	TAZ G 226 * 020 L □ # @ 0 A ++	TAZ G 226 * 020 LL @ 9 A ++	G	22	20	0.625	4	40	48	6	8	8	0.125	0.45	0.40	0.18	0.28	0.25	0.11
CWR29J*226*0H+□	TAZ H 226 * 020 L □ # @ 0 A ++	TAZ H 226 * 020 LL @ 9 A ++	H	22	20	0.18	4	40	48	6	8	8	0.150	0.91	0.82	0.37	0.16	0.15	0.07
CWR29J*336*0H+□	TAZ H 336 * 020 L □ # @ 0 A ++	TAZ H 336 * 020 LL @ 9 A ++	H	33	20	0.18	6	60	72	8	10	10	0.150	0.91	0.82	0.37	0.16	0.15	0.07
CWR29J*476*0H+□	TAZ H 476 * 020 L □ # @ 0 A ++	TAZ H 476 * 020 LL @ 9 A ++	H	47	20	0.18	10	100	120	8	10	10	0.150	0.91	0.82	0.37	0.16	0.15	0.07
CWR29J*476*0X+□	TAZ X 476 * 020 L □ # @ 0 A ++	TAZ X 476 * 020 LL @ 9 A ++	X	47	20	0.11	10	100	120	8	10	10	0.200	1.35	1.21	0.54	0.15	0.13	0.06
CWR29K*334*0A+□	TAZ A 334 * 025 L □ # @ 0 A ++	TAZ A 334 * 025 LL @ 9 A ++	A	0.33	25	7.5	1	10	12	6	8	8	0.050	0.08	0.07	0.03	0.61	0.55	0.24
CWR29K*474*0A+□	TAZ A 474 * 025 L □ # @ 0 A ++	TAZ A 474 * 025 LL @ 9 A ++	A	0.47	25	7.5	1	10	12	6	8	8	0.050	0.08	0.07	0.03	0.61	0.55	0.24
CWR29K*684*0B+□	TAZ B 684 * 025 L □ # @ 0 A ++	TAZ B 684 * 025 LL @ 9 A ++	B	0.68	25	4	1	10	12	6	8	8	0.070	0.13	0.12	0.05	0.53	0.48	0.21
CWR29K*105*0B+□	TAZ B 105 * 025 L □ # @ 0 A ++	TAZ B 105 * 025 LL @ 9 A ++	B	1	25	4	1	10	12	6	8	8	0.070	0.13	0.12	0.05	0.53	0.48	0.21
CWR29K*105*0C+□	TAZ C 105 * 025 L □ # @ 0 A ++	TAZ C 105 * 025 LL @ 9 A ++	C	1	25	2.6	1	10	12	6	8	8	0.075	0.17	0.15	0.07	0.44	0.40	0.18
CWR29K*155*0D+□	TAZ D 155 * 025 L □ # @ 0 A ++	TAZ D 155 * 025 LL @ 9 A ++	D	1.5	25	1.7	1	10	12	6	8	8	0.080	0.22	0.20	0.09	0.37	0.33	0.15
CWR29K*225*0D+□	TAZ D 225 * 025 L □ # @ 0 A ++	TAZ D 225 * 025 LL @ 9 A ++	D	2.2	25	2	1	10	12	6	8	8	0.090	0.20	0.18	0.08	0.40	0.36	0.16
CWR29K*225*0E+□	TAZ E 225 * 025 L □ # @ 0 A ++	TAZ E 225 * 025 LL @ 9 A ++	E	2.2	25	1	1	10	12	6	8	8	0.090	0.30	0.27	0.12	0.30	0.27	0.12
CWR29K*335*0E+□	TAZ E 335 * 025 L □ # @ 0 A ++	TAZ E 335 * 025 LL @ 9 A ++	E	3.3	25	1.2	1	10	12	6	8	8	0.090	0.27	0.25	0.11	0.33	0.30	0.13
CWR29K*475*0F+□	TAZ F 475 * 025 L □ # @ 0 A ++	TAZ F 475 * 025 LL @ 9 A ++	F	4.7	25	0.7	2	20	24	6	8	8	0.100	0.38	0.34	0.15	0.26	0.24	0.11
CWR29K*685*0E+□	TAZ F 685 * 025 L □ # @ 0 A ++	TAZ F 685 * 025 LL @ 9 A ++	F	6.8	25	0.8	2	20	24	6	8	8	0.100	0.35	0.32	0.14	0.28	0.25	0.11
CWR29K*685*0G+□	TAZ G 685 * 025 L □ # @ 0 A ++	TAZ G 685 * 025 LL @ 9 A ++	G	6.8	25	0.3	2	20	24	6	8	8	0.125	0.65	0.58	0.26	0.19	0.17	0.08
CWR29K*106*0G+□	TAZ G 106 * 025 L □ # @ 0 A ++	TAZ G 106 * 025 LL @ 9 A ++	G	10	25	0.35	3	30	36	6	8	8	0.125	0.60	0.54	0.24	0.21	0.19	0.08
CWR29K*156*0G+□	TAZ G 156 * 025 L □ # @ 0 A ++	TAZ G 156 * 025 LL @ 9 A ++	G	15	25	0.35	4	40	48	6	8	8	0.125	0.60	0.54	0.24	0.21	0.19	0.08
CWR29K*156*0H+□	TAZ H 156 * 025 L □ # @ 0 A ++	TAZ H 156 * 025 LL @ 9 A ++	H	15	25	0.2	4	40	48	6	8	8	0.150	0.87	0.78	0.35	0.17	0.16	0.07
CWR29K*226*0G+□	TAZ G 226 * 025 L □ # @ 0 A ++	TAZ G 226 * 025 LL @ 9 A ++	G	22	25	0.35	6	60	72	6	8	8	0.125	0.60	0.54	0.24	0.21	0.19	0.08
CWR29K*226*0H+□	TAZ H 226 * 025 L □ # @ 0 A ++	TAZ H 226 * 025 LL @ 9 A ++	H	22	25	0.18	6	60	72	6	8	8	0.150	0.91	0.82	0.37	0.16	0.15	0.07
CWR29K*336*0H+□	TAZ H 336 * 025 L □ # @ 0 A ++	TAZ H 336 * 025 LL @ 9 A ++	H	33	25	0.18	10	100	120	8	10	10	0.150	0.91	0.82	0.37	0.16	0.15	0.07
CWR29M*224*0A+□	TAZ A 224 * 035 L □ # @ 0 A ++	TAZ A 224 * 035 LL @ 9 A ++	A	0.22	35	12	1	10	12	6	8	8	0.050	0.06	0.06	0.03	0.77	0.70	0.31
CWR29M*334*0A+□	TAZ A 334 * 035 L □ # @ 0 A ++	TAZ A 334 * 035 LL @ 9 A ++	A	0.33	35	12	1	10	12	6	8	8	0.050	0.06	0.06	0.03	0.77	0.70	0.31
CWR29M*474*0B+□	TAZ B 474 * 035 L □ # @ 0 A ++	TAZ B 474 * 035 LL @ 9 A ++	B	0.47	35	6.8	1	10	12	6	8	8	0.070	0.10	0.09	0.04	0.69	0.62	0.28
CWR29M*684*0C+□	TAZ C 684 * 035 L □ # @ 0 A ++	TAZ C 684 * 035 LL @ 9 A ++	C	0.68	35	4	1	10	12	6	8	8	0.075	0.14	0.12	0.05	0.55	0.49	0.22
CWR29M*105*0D+□	TAZ D 105 * 035 L □ # @ 0 A ++	TAZ D 105 * 035 LL @ 9 A ++	D	1	35	2.2	1	10	12	6	8	8	0.080	0.19	0.17	0.08	0.42	0.38	0.17
CWR29M*155*0E+□	TAZ E 155 * 035 L □ # @ 0 A ++	TAZ E 155 * 035 LL @ 9 A ++	E	1.5	35	1.3	1	10	12	6	8	8	0.090	0.26	0.24	0.11	0.34	0.31	0.14
CWR29M*335*0F+□	TAZ F 335 * 035 L □ # @ 0 A ++	TAZ F 335 * 035 LL @ 9 A ++	F	3.3	35	0.7	1	10	12	6	8	8	0.100	0.38	0.34	0.15	0.26	0.24	0.11
CWR29M*475*0G+□	TAZ G 475 * 035 L □ # @ 0 A ++	TAZ G 475 * 035 LL @ 9 A ++	G	4.7	35	0.375	2	20	24	6	8	8	0.125	0.58	0.52	0.23	0.22	0.19	0.09
CWR29M*685*0G+□	TAZ G 685 * 035 L □ # @ 0 A ++	TAZ G 685 * 035 LL @ 9 A ++	G	6.8	35	0.375	3	30	36	6	8	8	0.125	0.58	0.52	0.23	0.22	0.19	0.09
CWR29M*685*0H+□	TAZ H 685 * 035 L □ # @ 0 A ++	TAZ H 685 * 035 LL @ 9 A ++	H	6.8	35	0.5	3	30	36	6	8	8	0.150	0.55	0.49	0.22	0.27	0.25	0.11
CWR29M*106*0H+□	TAZ H 106 * 035 L □ # @ 0 A ++	TAZ H 106 * 035 LL @ 9 A ++	H	10	35	0.5	4	40	48	8	10	10	0.150	0.55	0.49	0.22	0.27	0.25	0.11
CWR29M*104*0A+□	TAZ A 104 * 050 L □ # @ 0 A ++	TAZ A 104 * 050 LL @ 9 A ++	A	0.1	50	12	1	10	12	6	8	8	0.050	0.06	0.06	0.03	0.77	0.70	0.31
CWR29M*154*0A+□	TAZ A 154 * 050 L □ # @ 0 A ++	TAZ A 154 * 050 LL @ 9 A ++	A	0.15	50	12	1	10	12	6	8	8	0.050	0.06	0.06	0.03	0.77	0.70	0.31

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5V RMS with a maximum DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes.

**NOTE:** AVX reserves the right to supply a higher voltage rating or tighter tolerance part in the same case size, to the same reliability standards.



# TAZ Series



## CWR29 - MIL-PRF-55365/11 Established Reliability, COTS-Plus & Space Level

RATING & PART NUMBER REFERENCE				Parametric Specifications by Rating per MIL-PRF-55365/11							Typical Ripple Data by Rating								
				Cap @ 120Hz @ 25°C	DC Rated Voltage @ +85°C	ESR @ 100kHz @ +25°C	DCL max @ +25°C (µA)	DCL max @ +85°C (µA)	DCL max @ +125°C (µA)	DCL max @ +25°C (%)	DF Max @ (85/125)°C (%)	-55°C (%)	Power Dissipation W	25°C Ripple A (100kHz)	85°C Ripple A (100kHz)	125°C Ripple A (100kHz)	25°C Ripple V (100kHz)	85°C Ripple V (100kHz)	125°C Ripple V (100kHz)
CWR29 P/N	AVX MIL & COTS-Plus P/N	AVX SRC9000 P/N	Case	µF @ 25°C	V @ +85°C	Ohms @ +25°C	(µA)	(µA)	(µA)	(%)	(%)	(%)	W	A (100kHz)	A (100kHz)	A (100kHz)	V (100kHz)	V (100kHz)	V (100kHz)
CWR29N^224^@B+□	TAZ B 224 * 050 L □ # @ 0 ^ ++	TAZ B 224 * 050 LL @ 9 ^ ++	B	0.22	50	6.8	1	10	12	6	8	8	0.070	0.10	0.09	0.04	0.69	0.62	0.28
CWR29N^334^@B+□	TAZ B 334 * 050 L □ # @ 0 ^ ++	TAZ B 334 * 050 LL @ 9 ^ ++	B	0.33	50	4.8	1	10	12	6	8	8	0.070	0.12	0.11	0.05	0.58	0.52	0.23
CWR29N^474^@C+□	TAZ C 474 * 050 L □ # @ 0 ^ ++	TAZ C 474 * 050 LL @ 9 ^ ++	C	0.47	50	3.2	1	10	12	6	8	8	0.075	0.15	0.14	0.06	0.49	0.44	0.20
CWR29N^684^@D+□	TAZ D 684 * 050 L □ # @ 0 ^ ++	TAZ D 684 * 050 LL @ 9 ^ ++	D	0.68	50	2.3	1	10	12	6	8	8	0.090	0.19	0.17	0.07	0.43	0.39	0.17
CWR29N^105^@E+□	TAZ E 105 * 050 L □ # @ 0 ^ ++	TAZ E 105 * 050 LL @ 9 ^ ++	E	1	50	1.7	1	10	12	6	8	8	0.090	0.23	0.21	0.09	0.39	0.35	0.16
CWR29N^155^@F+□	TAZ F 155 * 050 L □ # @ 0 ^ ++	TAZ F 155 * 050 LL @ 9 ^ ++	F	1.5	50	1.1	1	10	12	6	8	8	0.100	0.30	0.27	0.12	0.33	0.30	0.13
CWR29N^225^@F+□	TAZ F 225 * 050 L □ # @ 0 ^ ++	TAZ F 225 * 050 LL @ 9 ^ ++	F	2.2	50	0.7	2	20	24	6	8	8	0.100	0.38	0.34	0.15	0.26	0.24	0.11
CWR29N^335^@G+□	TAZ G 335 * 050 L □ # @ 0 ^ ++	TAZ G 335 * 050 LL @ 9 ^ ++	G	3.3	50	0.5	2	20	24	6	8	8	0.125	0.50	0.45	0.20	0.25	0.23	0.10
CWR29N^475^@H+□	TAZ H 475 * 050 L □ # @ 0 ^ ++	TAZ H 475 * 050 LL @ 9 ^ ++	H	4.7	50	0.5	3	30	36	6	8	8	0.150	0.55	0.49	0.22	0.27	0.25	0.11

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5V RMS with a maximum DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes.

**NOTE: AVX reserves the right to supply a higher voltage rating or tighter tolerance part in the same case size, to the same reliability standards.**

