


# Time-Delay Fuses

## Class G - 600 Volt, 1/2 - 20 Amps

### 480 Volt, 25 - 60 Amps



Dimensional Data

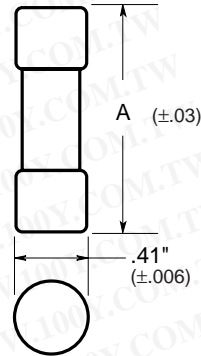

Catalog Symbol: SC  
 Current-Limiting  
 Ampere Rating: 1/2 to 60A (fast-acting),  
 7 to 60A (time-delay)  
 Voltage Ratings:  
 SC 1/2 to 20 600Vac, 170Vdc  
 SC 25 to 60 480Vac, 300Vdc  
 Interrupting Rating: 100,000A RMS Sym. AC, 10,000A dc  
 Agency Information:  
 UL Listed, Std. 248-5, Class G, Guide JDDZ, File E4273  
 CSA Certified, C22.2 No. 248.5, Class 1422-01, File 53787

Fuse (Amps)	A
SC-1/2 to 15	1.31"
SC-20	1.41"
SC-25 to 30	1.62"
SC-35 to 60	2.25"

Catalog Numbers

SC-1/2	SC-6	SC-25
SC-1	SC-7	SC-30
SC-1 1/2	SC-8	SC-35
SC-2	SC-9	SC-40
SC-2 1/2	SC-10	SC-45
SC-3	SC-12	SC-50
SC-4	SC-15	SC-60
SC-5	SC-20	—


Carton Quantity and Weight

Catalog Number	Carton Qty.	Weight†	
		Lbs.	Kg.
1/2-15	4	0.060	0.0272
20	4	0.064	0.029
25-30	2	0.040	0.018
35-60	2	0.075	0.0340

†Weight per carton.

General Information:

- Compact branch-circuit units with high interrupting rating and current-limitation.
- With 600V rating, they can be used in 120/208, 120/240 and 277/480V circuits.
- Length variations relative to case size make the "rejection" type fuses.
- In general, SC fuses are about 1/3 the size of the 600V NEC fuse type.
- SC fuses with ampere ratings above 6A have a degree of overload time-delay which permits them to pass temporary overloads. At 200% load, they have a minimum opening time of 12 seconds.



Recommended fuseblocks/fuseholders for Class G fuses  
 See Data Sheets listed below

- Open fuseblocks - 1106
- In-line fuseholders - 1123, 1124

CE logo denotes compliance with European Union Low Voltage Directive (50-1000Vac, 75-1500Vdc). Refer to Data Sheet: 8002 or contact Bussmann Application Engineering at 636-527-1270 for more information.


勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

# Time-Delay Fuses

**Class G – 600 Volt, ½ - 20 Amps**  
**480 Volt, 25 - 60 Amps**

# SC

Peak Let-Through Curves

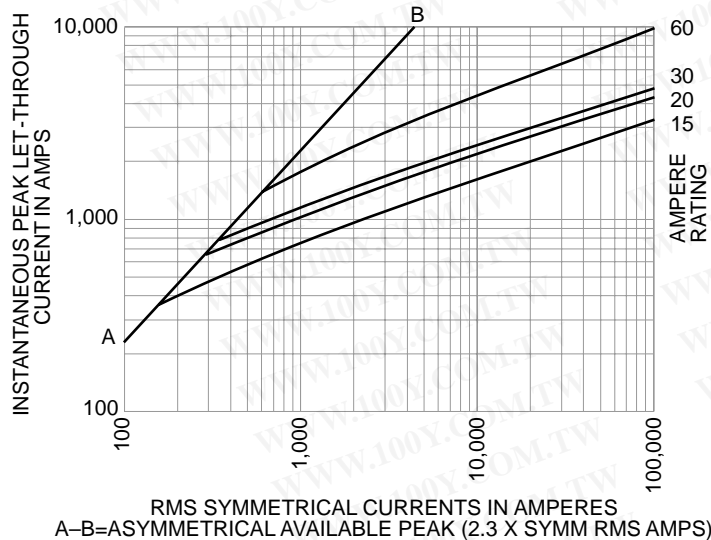

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)


# Time-Delay Fuses

## Class G - 600 Volt, 1/2 - 20 Amps

## 480 Volt, 25 - 60 Amps

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

Time-Current Characteristic Curves—Average Melt

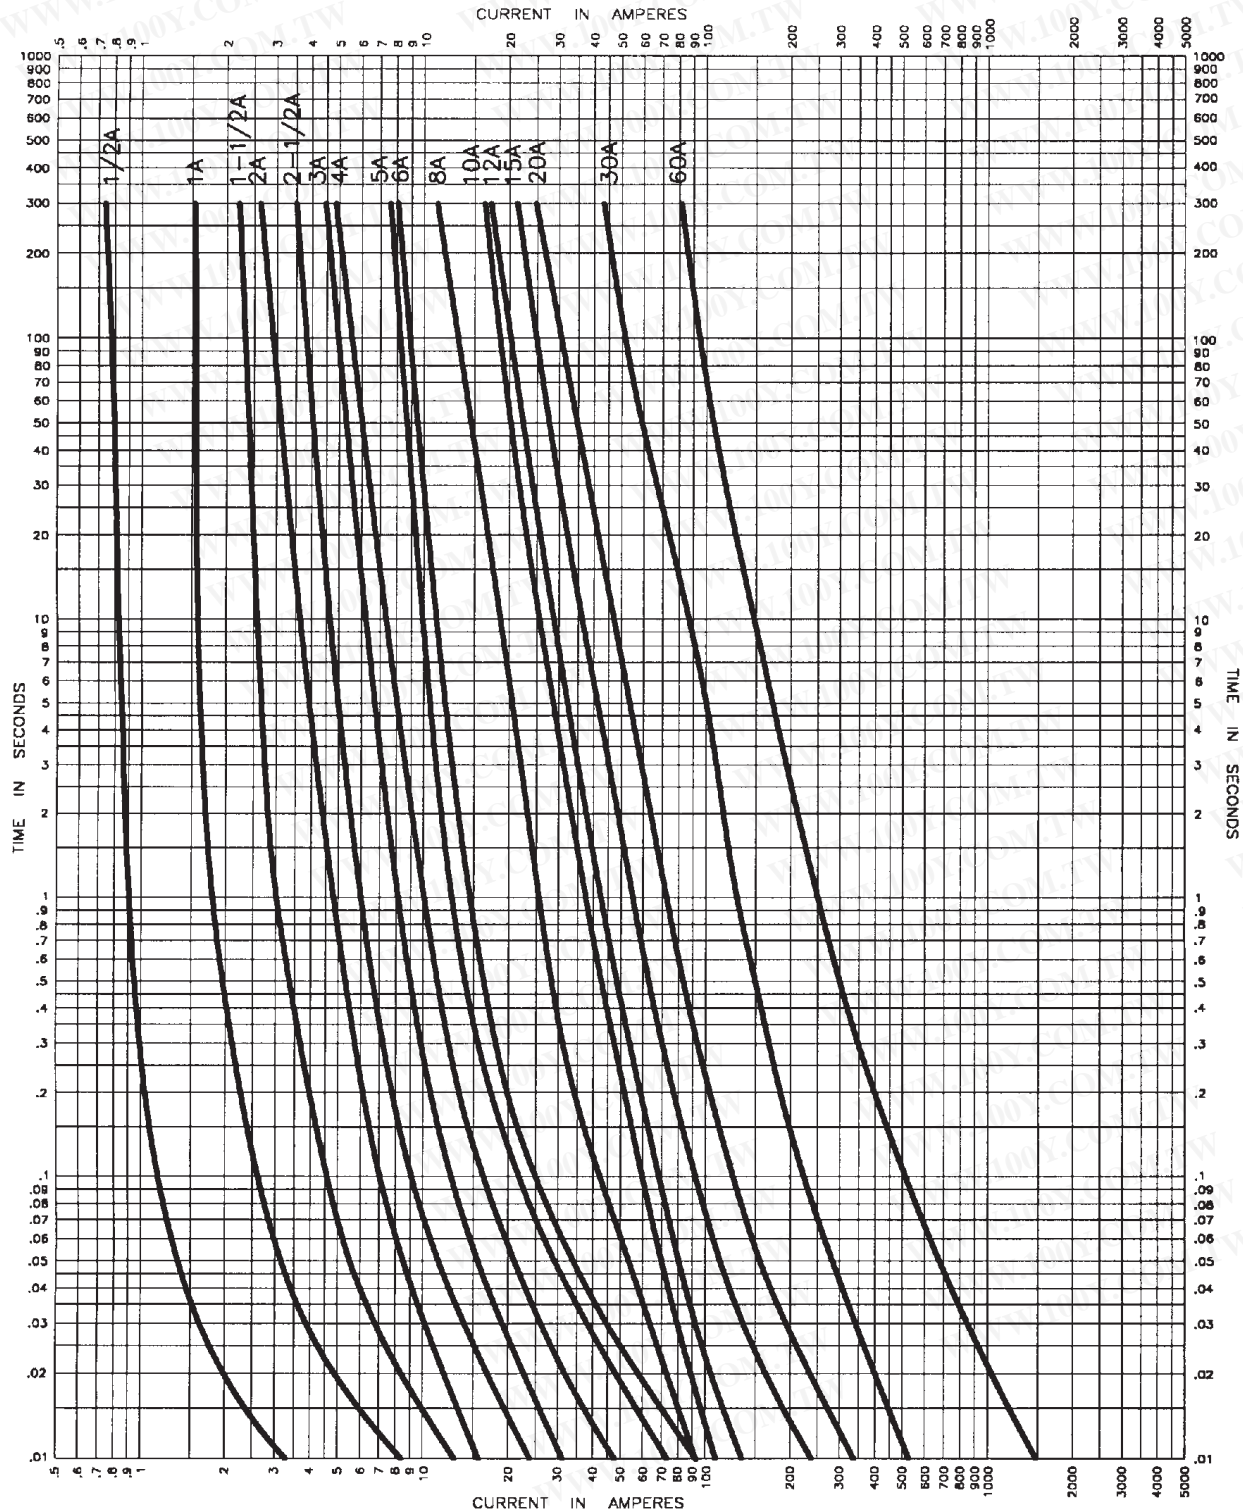

The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.