



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

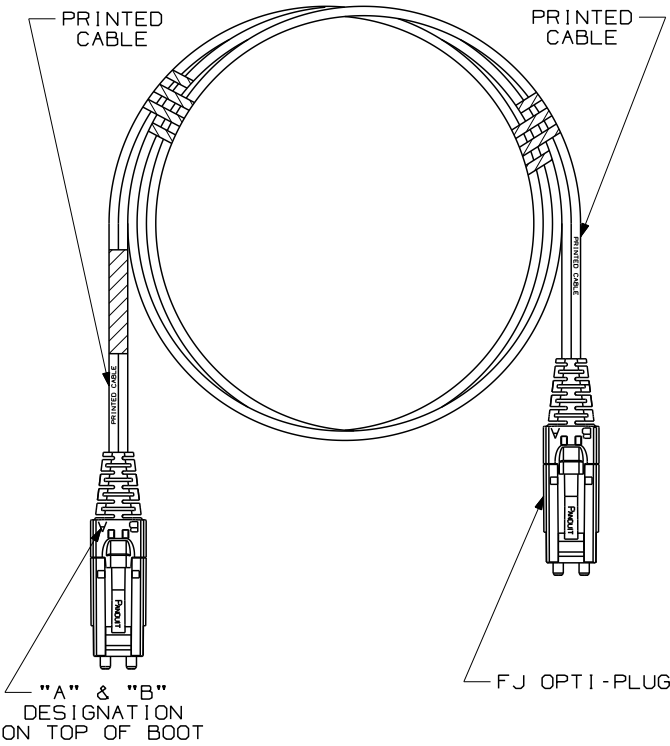

- NOTES:
1. SEE SHEET 2 FOR PRODUCT DESCRIPTIONS AND TECHNICAL SPECIFICATIONS.
 2. SEE CURRENT CATALOG FOR PATCH CORD LENGTHS AND PACKAGE QUANTITY.
 3. FOR LENGTHS OTHER THAN THOSE LISTED IN CATALOG, CONTACT YOUR PANDUIT SALES PERSON.
 4. TESTED TO EIA/TIA 568-B.3.
 5. PATCH CORD ROUTING CONFIGURATION A TO B.
 6. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.



										DUPLEX FIBER OPTIC PATCH CORD OPTI-PLUG TO OPTI-PLUG CONFIGURATION CUSTOMER DRAWING		
										 PANDUIT TM CORP. TINLEY PARK, ILL 60477		
										ALL DIMENSIONS ARE GIVEN IN INCHES. UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) (.XXX) (.XX) ANGLES		DRAWING FILENAME MO2779BM_DC_00A.prt
										THIRD ANGLE PROJECTION		SCALE NONE
										DRAWN BY MC	PART NO. SEE TABLE, SHT. 2	
										DATE 05-11-07	DRAWING NO. 02779-19 (SHT. 1 of 2)	
REV R	DATE 06-04-07	BY MC	CHK MC	DESCRIPTION RELEASED TO PRODUCTION	ECN 02779-19	R	CUST	SUP	OTH	CHK'D	SIZE A	

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

DUPLEX OPTI-PLUG TO OPTI-PLUG FIBER OPTIC PATCH CORD							
PANDUIT PART NO.	CABLE				FJ OPTI-PLUG		
	RATING	FIBER TYPE	COUNT	COLOR	MAX. IL	RL	COLOR
FXD6P-6PM*Y	RISER (OFNR)	10 GbE 50/125um OM3	DUPLEX 3.0mm ZIPCORD	AQUA	0.30dB	26dB	ELECTRIC IVORY
F5D6P-6PM*Y		50/125um OM2		ORANGE	0.30dB	20dB	ELECTRIC IVORY
F6D6P-6PM*Y		62.5/125um OM1		ORANGE	0.30dB	20dB	ELECTRIC IVORY
F9D6P-6PM*Y		9/125um OS1		YELLOW	0.75dB	55dB	BLUE

* - DENOTES PATCH CORD LENGTH, WHERE M = METERS AND F = FEET

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH	CHK'D
R	06-04-07	MC		RELEASED TO PRODUCTION	02779-19					

DUPLEX FIBER OPTIC PATCH CORD OPTI-PLUG TO OPTI-PLUG CONFIGURATION CUSTOMER DRAWING									
 PANDUIT ™ CORP. TINLEY PARK, ILL 60477									
 THIRD ANGLE PROJECTION						ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.X) (.XX) ±.03 (0.8) ANGLES		DRAWING FILENAME: MO2779BM_DC_00A.prt SCALE: NONE	
DRAWN BY: MC						REVIEW DRAWING NUMBERS:		PART NO.:	
DATE: 05-11-07								SEE TABLE, SHT. 2	
								DRAWING NO.:	
								02779-19	
								(SHT. 2 of 2)	
								SIZE: A	