




(2,54mm) .100"

MMSD, MMSDT, MMSS, MMSST, IPD1 SERIES

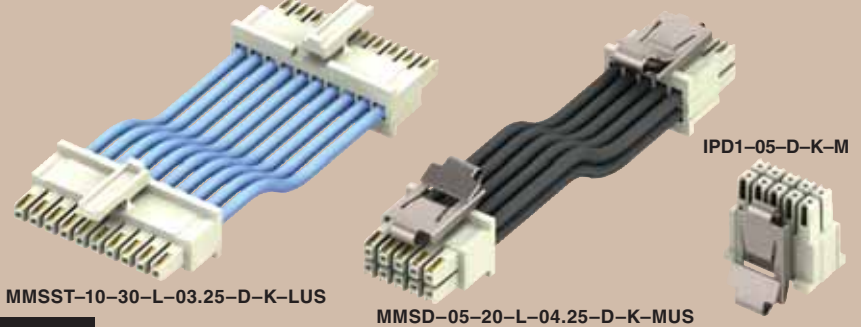

DISCRETE WIRE CABLE ASSEMBLY

Mates with: IPL1
(Does not mate with IPT1)

SPECIFICATIONS

For complete specifications see www.samtec.com?MMSD, www.samtec.com?MMSDT, www.samtec.com?MMSS, www.samtec.com?MMSST or www.samtec.com?IPD1

Insulator Material: Nylon 66
Contact Material: Phosphor Bronze
Plating: Au or Sn over 50µ" (1,27µm) Ni
Operating Temp Range: -55°C to +105°C (20-26 AWG), -55°C to +80°C (28-30 AWG), -55°C to +125°C (*Teflon®)
Voltage Rating: 22 to 30 AWG = 300 VAC/424 VDC 20 AWG = 600 VAC/848 VDC (PVC)
Wire: 20 to 30 AWG
RoHS Compliant: Yes



CURRENT RATING	
AMBIENT TEMP	MMSD/IPL1
20°C	7.4A
40°C	6.5A
60°C	5.9A
95°C	3.8A
6 POSITIONS (2x3) 20 AWG POWERED	

APPLICATION SPECIFIC OPTION

- Other color coded cables (*Teflon® N/A).
- Other sizes/pin counts.
- With or without Plug Polarization (omit pin 1).
- Other Gold plating options. Call Samtec.

APPLICATION

-24C CABLE COLOR CODING	
PIN	COLOR
1	BROWN
2	RED
3	ORANGE
4	YELLOW
5	GREEN
6	BLUE
7	VIOLET
8	GRAY
9	WHITE
10	BLACK
ETC	REPEAT

Note: For wiring option information refer to drawing on web.

Note: Some lengths, styles and options are non-standard, non-returnable.

TYPE	PINS PER ROW	WIRE GAUGE	PLATING OPTION	ASSEMBLY LENGTH	END OPTION	K	LATCH OPTION
MMSD = Double Row PVC Cable	-02, -05, -10,	-20 -22 -24	-L = 10µ" (0,25µm) Gold on contact, Matte Tin on tail	- "XX.XX" = Assembly Length in Inches (82,55mm) 03.25" min.	-S = Single End -D = Double End (Latch Required)	-K = Keyed Polarization	
MMSDT = Double Row *Teflon® Cable (24, 28 & 30 AWG only)	-15, -16, -20, -25	-24C = Color Coded Cable -26 -28 -30	-D-K-MUS				
MMSS = Single Row PVC Cable							
MMSST = Single Row *Teflon® Cable (24, 28 & 30 AWG only)							

Diagram showing dimensions: No. of positions x (2,54) .100, 25 + (1,40) .055, (8,89) .350, (2,54) .100, (12,83) .505, (1,52) .060, (1,91) .075, (1,57) .062 DIA, (3,81) .150, (17,93) .706, (3,17) .1250.

RUGGEDIZED by SAMTEC

- Individually shrouded contacts
- Metal or plastic latches

Diagram showing latches: -M & -MXX (MMSD/MMSDT), -M (Metal Latch up, straight), -MDS (Metal Latch down, straight), -MUS (Metal Latch up, straight), -MDX (Metal Latch down, crossed), -LDS (Plastic Latch down, straight), -LUS (Plastic Latch up, straight), -LXS (Plastic Latch up, crossed), -LXD (Plastic Latch down, crossed).

Diagram showing end options: -S (Single End), -D (Double End), -M (Single Ended, Metal Latches (Leave blank for plastic)), -D-K-LUS (Double Ended (-D) Crossed requires MMSD/MMSDT).

TYPE	POSITIONS PER ROW	ROW OPTION	K	LATCH OPTION	TYPE	WIRE GAUGE	01	PLATING OPTION
IPD1 = Body, Loose	-02, -05, -10, -15, -16, -20, -25	-S = Single Row -D = Double Row	-K = Keyed Polarization	-M = Metal Latch (Leave blank for plastic latch)	CC79L = Contact, Loose CC79R = Contact, Full Reel (15,000 Parts per Reel)	-2630 = 26 to 30 AWG -2024 = 20 to 24 AWG		-L = 10µ" (0,25µm) Gold on contact, Matte Tin on tail

HAND TOOLS

20 to 24 AWG: CAT-HT-179-2024-11
26 to 30 AWG: CAT-HT-179-2630-11

Diagram showing dimensions: (12,83) .505, (7,24) .285, (1,52) .060, (1,91) .075, (1,57) .062 DIA, (3,81) .150, (17,93) .706, (3,17) .1250.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM