

0,80mm HI-SPEED SOCKET HSEC8 SERIES

SPECIFICATIONS

For complete specifications see www.samtec.com?HSEC8


Insulator Material: Black Liquid Crystal Polymer
Contact: BeCu
Plating: Au or Sn over 50µ" (1,27µm) Ni
Current Rating: 3.1A @ 30°C Temperature Rise
Operating Temp: -55°C to +125°C
Card Insertion Depth: (3,15mm) .125" nominal

Mates with:
1,6mm thick cards,
HSC8, EEDP

Mates with Samtec
High Speed Jump Cards
(HSC8 Series)

Mates with
(1,60mm) .062" cards

APPLICATIONS

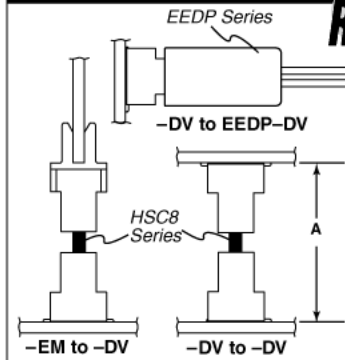

HSEC8 CARD STYLE	A
-01	(25,00) .984
-02	(26,54) 1.05

Edge Mount and Vertical Surface Mount available

ALSO AVAILABLE


Polarized mates for EEDP Series twin-ax Cables

CONNECTOR	CABLE
HSEC8-113	EEDP-08
HSEC8-125	EEDP-16
HSEC8-137	EEDP-24
HSEC8-149	EEDP-32

Note: Some lengths, styles and options are non-standard, non-returnable.

Processing:


Max Processing Temp: 230°C for 60 seconds, or 260°C for 20 seconds 3x with Matte Sn plating
Lead-Free Solderable: Yes, with Matte Sn
SMT Lead Coplanarity: (0,10mm) .004" max (10-60)
Suggested PCB Layouts: For reference only. Please contact Samtec or go to www.samtec.com?HSEC8 for recommended PCB layout.

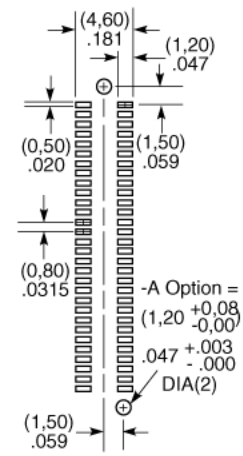

10, 20, 30, 40, 50, 60
-01 = (1,60mm) .062" thick card

-S or -SM = 30µ" (0,76µm) Gold on contact, Tin (-S) or Matte Tin (-SM) on tail

-A = Alignment Pin
-K = (5,50mm) .217" DIA Polyimide Film Pick & Place Pad
-TR = Tape & Reel Packaging

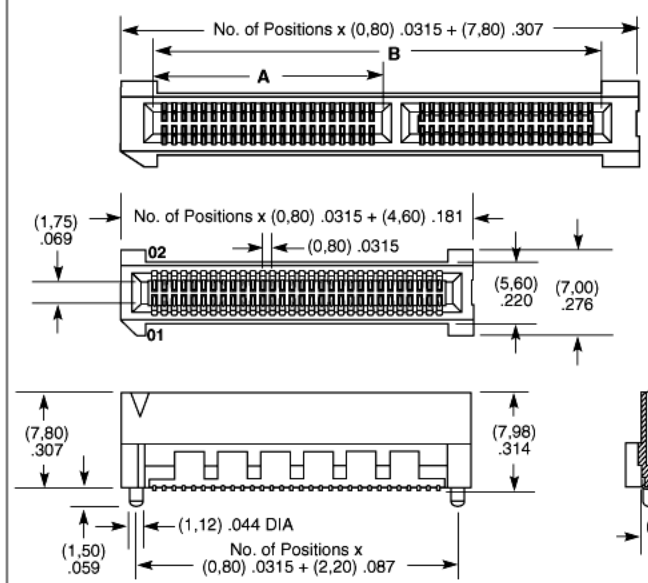

NO. OF POSITIONS	A	B
40	(18,90) .744	(36,60) 1.441
50	(22,90) .902	(44,60) 1.756
60	(26,90) 1.059	(52,60) 2.071

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 • Fax: 812-948-5047
 SAMTEC FRANCE • Tel: 01 60 95 06 60 • Fax: 01 60 95 06 61
 SAMTEC SCANDINAVIA • Tel: +46-84477280 • Fax: +46-87420413
 SAMTEC CHINA • Tel: 86-21-5385-4089 • Fax: 86-21-5385-4047
 SAMTEC HONG KONG • Tel: 852-26904858 • Fax: 852-26904842
 SAMTEC UK • Tel: 01236 739292 • Fax: 01236 727113
 SAMTEC ITALY • Tel: 39 039 6890337 • Fax: 39 039 6890315
 SAMTEC ASIA PACIFIC • Tel: 65 6745-5955 • Fax: 65 6841-1502
 SAMTEC TAIWAN • Tel: 886 02 2698-3367 • Fax: 886 02 8698-2159
 SAMTEC ANZ • Tel: 613 9512 7747 • Fax: 613 9512 7745
 SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0 • Fax: +49 (0) 89 / 89460-299
 SAMTEC ISRAEL • Tel: 972-3-7526600 • Fax: 972-3-7526690
 SAMTEC JAPAN • Tel: 81-424-42-8318 • Fax: 81-424-42-8319
 SAMTEC KOREA • Tel: 823-17175685 • Fax: 823-17175684