

MINI EDGE-CARD SOCKET MEC1 SERIES


SPECIFICATIONS

For complete specifications see www.samtec.com?MEC1


- Insulator Material:** Black LCP
- Contact Material:** BeCu
- Plating:** Sn or Au over 50µ" (1,27µm) Ni
- Operating Temp Range:** -55°C to +125°C
- Current Rating:** 2A @ 80°C ambient
- Voltage Rating:** 300 VAC
- Insertion Depth:** (5,84mm) .230" to (8,13mm) .320"

Processing:


- Max Processing Temp:** 230°C for 60 seconds, or 260°C for 20 seconds 3x with Matte Sn plating
- Lead-Free Solderable:** Yes, with Matte Sn
- SMT Lead Coplanarity:** (0,10mm) .004" max (05-20) (0,15mm) .006" max (30-70)
- Suggested PCB Layouts:** For reference only. Please contact Samtec or go to www.samtec.com?MEC1 for recommended PCB layout.

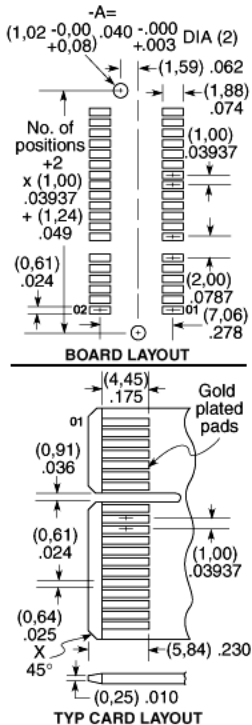

Mates with:
(1,60mm) .062" card

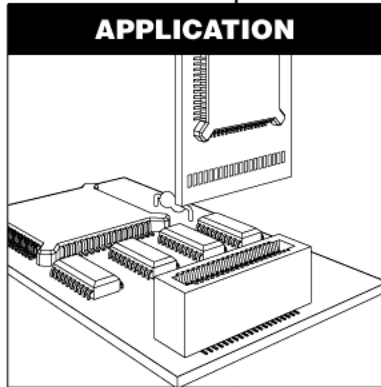

Note: Some sizes, styles and options are non-standard, non-returnable.

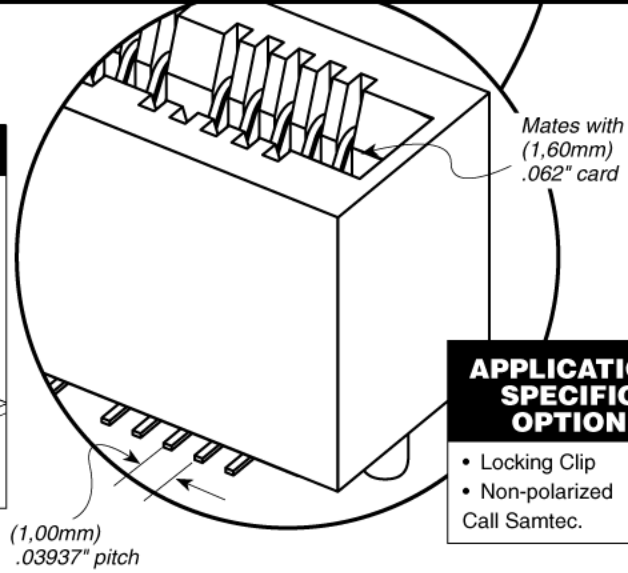

APPLICATION SPECIFIC OPTION


- Locking Clip
 - Non-polarized
- Call Samtec.




05, 08, 20, 30, 40, 50, 60, 70

- S or -SM**
= 30µ" (0,76µm) Gold on contact, Tin (-S) or Matte Tin (-SM) on tail
- L or -LM**
= 10µ" (0,25µm) Gold on contact, Tin (-L) or Matte Tin (-LM) on tail
- F or -FM**
= Gold flash on contact, Tin (-F) or Matte Tin (-FM) on tail

- A**
= Alignment Pin Metal or plastic at Samtec discretion.
- K**
= (7,87mm) .310" DIA Polyimide film Pick & Place Pad
- TR**
= Tape & Reel



POSITIONS PER ROW	POLARIZED POSITIONS
-05	3, 4
-08	5, 6
-20	15, 16
-30	21, 22
-40	31, 32
-50	41, 42
-60	31, 32, 63 & 64
-70	53, 54, 115 & 116

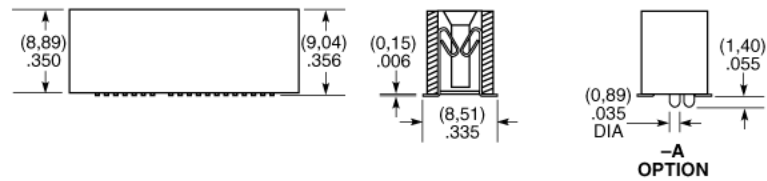

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 • Fax: 812-948-5047
 SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0 • Fax: +49 (0) 89 / 89460-299
 SAMTEC JAPAN • Tel: 81-424-42-8318 • Fax: 81-424-42-8319
 SAMTEC KOREA • Tel: 82-31-717-5685 • Fax: 82-31-717-5681
 SAMTEC SILICON VALLEY • Tel: 408-395-5900 • Fax: 408-395-1520
 SAMTEC FRANCE • Tel: 01 60 95 06 60 • Fax: 01 60 95 06 61
 SAMTEC CHINA • Tel: 86-21-5385-4089 • Fax: 86-21-5385-4047
 SAMTEC SOUTH AFRICA • Tel: 27 11 4528112 • Fax: 27 86 6714432
 SAMTEC UK • Tel: 01236 739292 • Fax: 01236 727113
 SAMTEC ITALY • Tel: 39 039 6890337 • Fax: 39 039 6890315
 SAMTEC INDIA • Tel: 91 80 306 21 612 • Fax: 91 80 5152 8187
 SAMTEC TAIWAN • Tel: 886 02 2698-3367 • Fax: 886 02 8698-2159
 SAMTEC HONG KONG • Tel: 852 2690 4658 • Fax: 852 2690 4642
 SAMTEC SCANDINAVIA • Tel: +46-84477280 • Fax: +46-84420413
 SAMTEC ISRAEL • Tel: 972-3-7526600 • Fax: 972-3-7526690