

4

3

2


1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION AUGUST, 2005.  
 © COPYRIGHT 2005 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
	A	FIRST ISSUE		18AUG05	JMS	FWK	

NOTES

- 100 TRAY PACK IN ACCORDANCE WITH AMP SPEC 107-3275
- SINGLE PACK IN ACCORDANCE WITH AMP SPEC 107-3275
- Au PLATING OVER Ni PLATING OVER Cu PLATING
- Ni PLATING OVER Cu PLATING
- 5. CHARACTERISTICS
  - FREQUENCY RANGE: DC-4GHz
  - NOMINAL IMPEDANCE: 50 OHMS
  - WORKING VOLTAGE: 500V RMS
  - INSULATION RESISTANCE: 5000 MOHMS
  - DIELECTRIC WITHSTAND VOLTAGE: 1500V RMS
  - CONTACT RESISTANCE:
    - CENTRE CONTACT 1.5 mOHMS
    - OUTER CONTACT 0.2 mOHMS
- 6. MECHANICAL CHARACTERISTICS
  - DURABILITY: 50 CYCLES
- 7. FOR TECHNICAL DATA REFER TO YOUR LOCAL TYCO ELECTRONICS SALES OFFICE
- 8. ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED

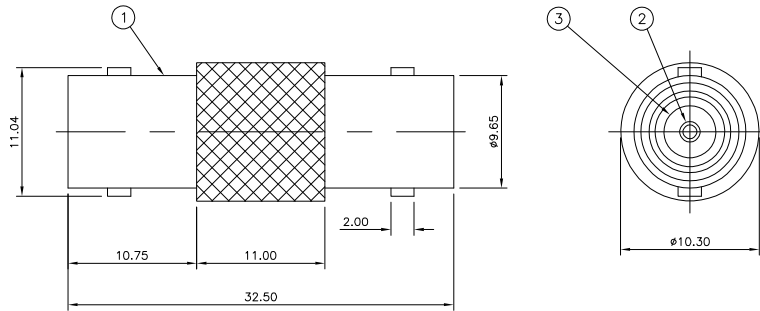

QTY	DESCRIPTION	ITEM
1	POLYMETHYLPENTENE INSULATOR	3
1	PHOS BRONZE CONTACT	2
1	ZINC ALLOY BODY	1
5--1	MATERIAL	DESCRIPTION
5--0		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. SANDWELL 18AUG05	Tyco Electronics Corporation Bideford, UK, EX39 4HE	
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK S. PARLOW 18AUG05	NAME BNC STRAIGHT ADAPTOR JJ	
	0 PLC ± -	APVD E. WHEELER-KING 18AUG05	PRODUCT SPEC 108-3435	
	1 PLC ± -	APPLICATION SPEC N/A	SIZE A3	CAGE CODE 00779
MATERIAL SEE TABLE	FINISH SEE TABLE	WEIGHT -	DRAWING NO 1634534	RESTRICTED TO -
CUSTOMER DRAWING			SCALE NTS	SHEET 1 OF 1 REV A