


- Series 180, 182, 183 DIL Headers are equipped with solder cups for wiring applications.
- Terminations are pluggable 0,51 diameter solder tails (M-M# 8000), see page 174 for details; or 2 & 3-level wrapposts, (M-M# 8301) see page 184 for details.

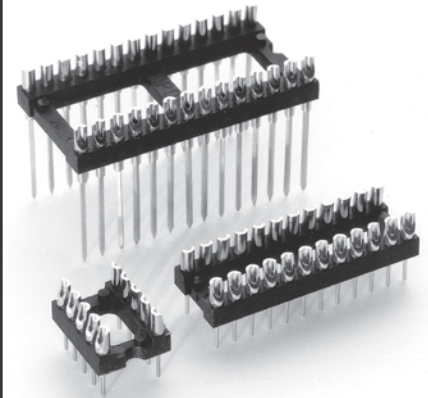

Total number of pins				Quantity per tube	Ordering Information			
	A	B	C		Solder Tail	2 Level Wrapost L = 9,4	3 Level Wrapost L = 12,95	
	<div style="border: 1px solid black; border-radius: 50%; padding: 5px; display: inline-block;"> <b>XX=Plating Code See Below</b> </div> <div style="border: 1px solid green; padding: 5px; display: inline-block; margin-left: 10px;"> <i>For RoHS compliance, select <span style="color: green;">◇</span> plating code. For the gold option (XX=10) also change part number from 18X-XX-XXX-00-001000 to 18X-10-XXX-00-001100</i> </div> <div style="border: 1px solid green; padding: 5px; display: inline-block; margin-left: 10px; color: green;"> <b>RoHS 2002/95/EC</b> </div>							
10	12,6	5,08	7,6	41	180-XX-210-00-001000	182-XX-210-00-001000	183-XX-210-00-001000	
4	5,0	7,62	10,1	102	180-XX-304-00-001000	182-XX-304-00-001000	183-XX-304-00-001000	
6	7,6	7,62	10,1	67	180-XX-306-00-001000	182-XX-306-00-001000	183-XX-306-00-001000	
8	10,1	7,62	10,1	50	180-XX-308-00-001000	182-XX-308-00-001000	183-XX-308-00-001000	
10	12,6	7,62	10,1	40	180-XX-310-00-001000	182-XX-310-00-001000	183-XX-310-00-001000	
14	17,7	7,62	10,1	28	180-XX-314-00-001000	182-XX-314-00-001000	183-XX-314-00-001000	
16	20,3	7,62	10,1	25	180-XX-316-00-001000	182-XX-316-00-001000	183-XX-316-00-001000	
18	22,8	7,62	10,1	22	180-XX-318-00-001000	182-XX-318-00-001000	183-XX-318-00-001000	
20	25,3	7,62	10,1	20	180-XX-320-00-001000	182-XX-320-00-001000	183-XX-320-00-001000	
22	27,8	7,62	10,1	18	180-XX-322-00-001000	182-XX-322-00-001000	183-XX-322-00-001000	
24	30,4	7,62	10,1	16	180-XX-324-00-001000	182-XX-324-00-001000	183-XX-324-00-001000	
28	35,5	7,62	10,1	14	180-XX-328-00-001000	182-XX-328-00-001000	183-XX-328-00-001000	
20	25,4	10,16	12,7	20	180-XX-420-00-001000	182-XX-420-00-001000	183-XX-420-00-001000	
22	27,8	10,16	12,7	18	180-XX-422-00-001000	182-XX-422-00-001000	183-XX-422-00-001000	
24	30,4	10,16	12,7	16	180-XX-424-00-001000	182-XX-424-00-001000	183-XX-424-00-001000	
28	35,5	10,16	12,7	14	180-XX-428-00-001000	182-XX-428-00-001000	183-XX-428-00-001000	
32	40,6	10,16	12,7	12	180-XX-432-00-001000	182-XX-432-00-001000	183-XX-432-00-001000	
24	30,5	15,24	17,7	16	180-XX-624-00-001000	182-XX-624-00-001000	183-XX-624-00-001000	
28	35,5	15,24	17,7	14	180-XX-628-00-001000	182-XX-628-00-001000	183-XX-628-00-001000	
32	40,6	15,24	17,7	12	180-XX-632-00-001000	182-XX-632-00-001000	183-XX-632-00-001000	
36	45,7	15,24	17,7	11	180-XX-636-00-001000	182-XX-636-00-001000	183-XX-636-00-001000	
40	50,8	15,24	17,7	10	180-XX-640-00-001000	182-XX-640-00-001000	183-XX-640-00-001000	
42	53,3	15,24	17,7	9	180-XX-642-00-001000	182-XX-642-00-001000	183-XX-642-00-001000	
48	60,9	15,24	17,7	8	180-XX-648-00-001000	182-XX-648-00-001000	183-XX-648-00-001000	
50	63,5	15,24	17,7	8	180-XX-650-00-001000	182-XX-650-00-001000	183-XX-650-00-001000	
52	66,0	15,24	17,7	7	180-XX-652-00-001000	182-XX-652-00-001000	183-XX-652-00-001000	
50	63,5	22,86	25,3	8	180-XX-950-00-001000	182-XX-950-00-001000	183-XX-950-00-001000	
52	66,0	22,86	25,3	7	180-XX-952-00-001000	182-XX-952-00-001000	183-XX-952-00-001000	
64	81,2	22,86	25,3	6	180-XX-964-00-001000	182-XX-964-00-001000	183-XX-964-00-001000	
SPECIFY PLATING CODE XX=					<b>10</b> <span style="color: green;">◇</span>	<b>90</b>	<b>40</b> <span style="color: green;">◇</span>	
Pin Plating					0,25µm Au	5,08µm Sn/Pb	5,08µm Sn	