

4

3

2


1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	REVISIONS		
F	LWR	DESCRIPTION	DATE	BY
AF	50			
C		REVISED PER ECR-09-011519	29MAY09	HMR KR



- 1 CONTINUOUS STRIP ON REELS WITH TERMINALS LOCATED ON 8.38±0.08 [.330±.003] CENTERS.
- 2 SLOT TERMINATES EITHER A SINGLE OR DOUBLE MAGNET WIRE OF THE SAME SIZE AND TYPE. COPPER RANGE IS 0.64-0.81mm [#22-#20] AWG.
- 3 AFTER INSERTION INTO PLASTIC HOLDER TAB PORTION MUST BE BENT OVER 45° TO 90° OR POTTED-IN TO PREVENT PULL-OUT WHEN MATING RECEPTACLE IS DISCONNECTED.
- 4 SPECIAL CAVITY ANVIL HEIGHT REQUIRED 3.30±0.07 [.130±.003] REF. APPLICATION SPEC. 114-2046, SEC. 3.2, NOTE 7.

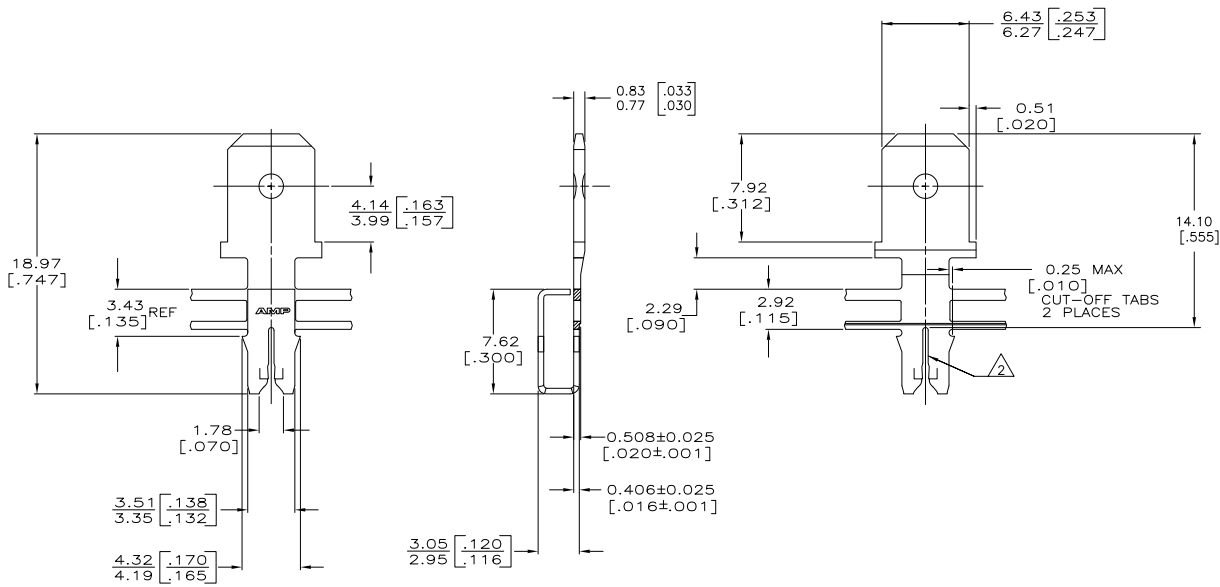

1217924-1  
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRW MICHAEL S. FEYER CHK KURT A. RANDOLPH	CSMAR2003 CSMAR2003	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm [INCHES]		APPRO PRODUCT SPEC 108-2012	NAME KURT A. RANDOLPH	TAB, 6.35 [.250] FASTON, 300 SERIES MAG-MATE	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 P.L.C. ± - 1 P.L.C. ± - 2 P.L.C. ± 0.25 (.010) 3 P.L.C. ± - 4 P.L.C. ± - ANGLES ± -		APPLICATION SPEC 114-2046	SIZE A2	CAGE CODE 00779	DRAWING NO. C=1217924
MATERIAL 4M PRE-MILLED BRASS	FINISH 0.002037 [.000080] MIN TIN PLATE	HEIGHT -	CUSTOMER DRAWING	SCALE 5:1	SHEET 1 of 1 REV C