





DRAWING MADE IN THIRD ANGLE PROJECTION

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 19
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
AF	50	G		REV PER 061A-0148-99	4 JUN 99	JR/JH

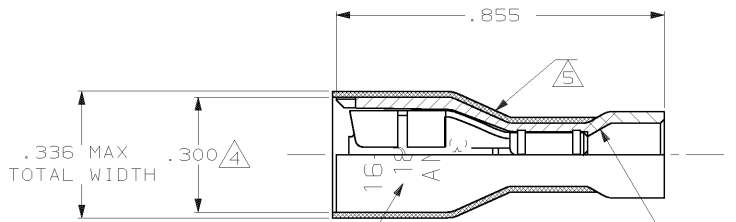

- 1 MATES WITH .032±.001x.187 TAB
- 2 WIRE STRIP LENGTH .281
- 3 INSULATION SIZE .090-.160 DIA
- △4 DIMENSION DOES NOT INCLUDE TRIM BURR
- △5 .015 MAX CARRIER TRIM BURR PER SIDE IS ALLOWABLE IN THE SHADED AREA

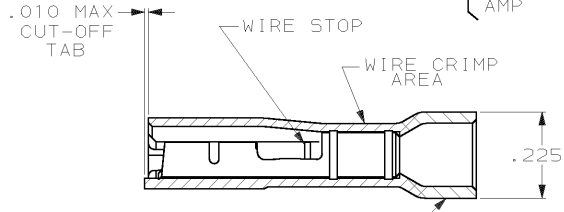

HOUSING: NYLON, COLOR-BLUE TRANSLUCENT		3-520412-2	
RECEPTACLE: #3 HARD BRASS			
TIN PL .000080 MIN THK			
MATERIAL & FINISH		PART NO	
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON: 2 PLC DEC ± 3 PLC DEC ± .015 ANGLES ± -	DR 11/2/88 P FORNEY CHK 11/2/88 MS FEHER APPD 11/2/88 K RANDOLPH APPD 11/14/88 T SHUTTER	AMP INCORPORATED Harrisburg, Pa. 17105 NAME RECEPTACLE ASSY, ULTRA-FAST PLUS, LOOSE PIECE .187 SERIES, 16-14 AWG	
MATERIAL SEE TABLE	PRODUCT SPEC 108-2044		
FINISH SEE TABLE	APPLICATION SPEC 114-2123	SIZE B	FSCM NO 00779
WEIGHT -		DRAWING NO 520412	SHEET 1 OF 1
		SCALE 4:1	

AMP 1470-15 REV 3-87
 04-JUN-99 09:04:20 amp13469 /home/amp13469/edimmod

CUSTOMER DRAWING