



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 19
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPO
G	14					REV, RDRW, & SM PKG PER 0720-0040-93	3-28-93	AP

METRIC
 DIMENSIONS LISTED IN mm [INCHES]

AMP WIRE RANGE	UL E13288 Listed
16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED
LR7189 Certified	MILITARY P/N AND CLASS
16-14 AWG SOLID OR STRANDED	NOT APPLICABLE

△ STAMP 6S AMP 16-14* APPROX AS SHOWN
 6S INDICATES STUD SIZE

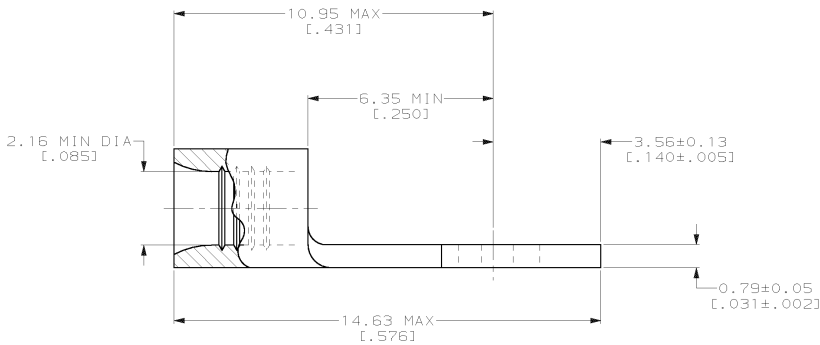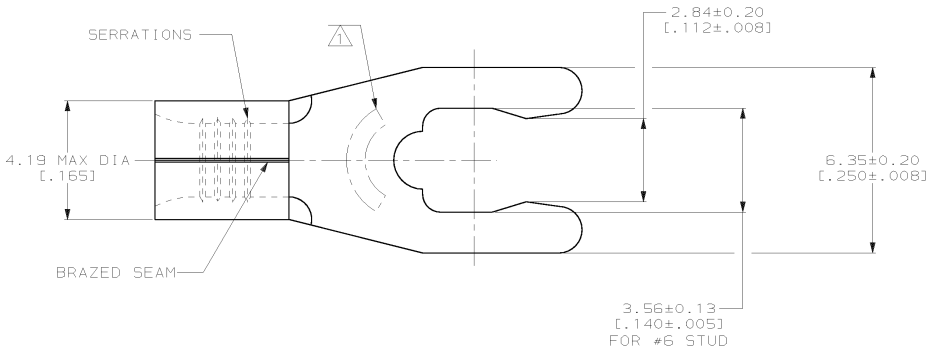

QUANTITY	PACKAGING TYPE	PART NO
100	LOOSE PIECE, BOX	8-53123-1
BULK	LOOSE PIECE	8-53123-0
5000	ON TAPE	53123-2
---	LOOSE PIECE	53123-1

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 170°C MAX	DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm (INCHES) TOLERANCES ON: 2 PL DEC ± - 3 PL DEC ± - ANGLES ± -	DR 3-29-93 TA BRINKMAN CHK 3-29-93 DA PATTERSON APPD 3-29-93 DE MILLER	AMP AMP Incorporated Harrisburg, PA 17105-3608	
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: NOT APPLICABLE	MATERIAL PHOSPHOR BRONZE PER ASTM B-103 ANNEALED	APPD 3-29-93 JL MECKLEY PRODUCT SPEC -		
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	WIRE CROSS SECTIONAL AREA RANGE: 1.04-2.62mm² [2,050-5,180] CIR MILS SOLID OR STRANDED	FINISH TIN PLATE 0.00254(0.00100) MIN THK PER MIL-T-10727	APPLICATION SPEC -	NAME TERMINAL, SHORT SPRING SPADE, SOLISTRAND™	
FOR ORDER ENTRY	1-800-526-5142	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		WEIGHT -	SIZE CAGE CODE DRAWING NO C 00779 C-53123	
AMP 1471-B REV 3-92					SCALE 10:1	SHEET 1 OF 1

20-MAR-00 10:38:12 amp13469 /home/amp13469/edmod

CUSTOMER DRAWING

53123

A

D

C

B

A

1

2

3

4

5

6

7

8

9

10

11

12