FILE NO. C-CD-803-02

NOTES:

① MAT'L: COPPER (STOCK TKN. $\frac{.040 \pm .001}{1.02}$)
PLATING: ELECTRO TIN (.0003 MIN)

② TIN-PLATED BRASS FUNNEL FERRULE

③ NYLON INSULATION (COLOR CODED YELLOW)

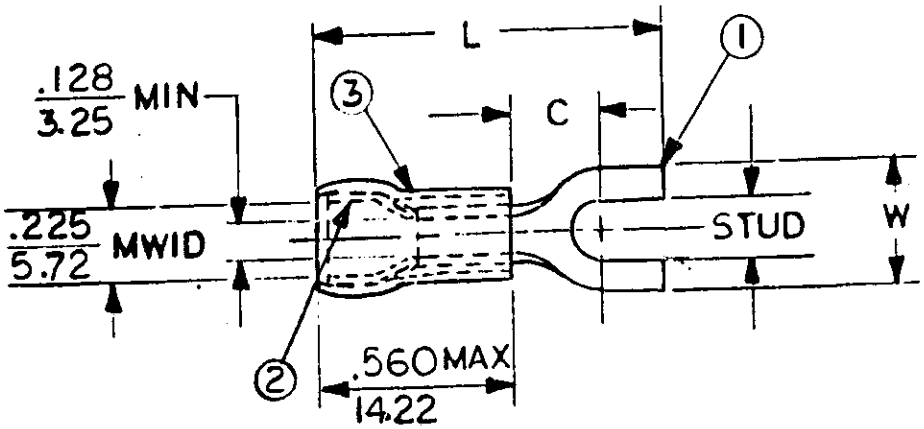

STUD SIZES: (±.005)

02 = .094
04 = .119
06 = .146
08 = .173
10 = .198
14 = .265
56 = .328
38 = .390

"UL" LISTING # E32244
"CSA" LISTING # 18689

WIRE SIZE: 12 - 10 AWG
4.0 - 6.0 MM^2

ALL DIMENSIONS = INCHES / MM

(MWID) = DENOTES MAXIMUM WIRE INSULATION DIAMETER

PART NUMBER	"W" ±.010	"C" MIN.	"L" MAX.				AVAILABLE STUD SIZES	
C-841-	.375 / 9.53	.301 / 7.65	1.118 / 28.40				06, 08, 10	
C-868-	.533 / 13.54	.393 / 9.98	1.271 / 32.28				10, 14, 56	

DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED			REFERENCE	SCALE: NTS	DATE	TITLE:	
FRAC.	DEC.	ANG.		DRWN. BY: JJ	11·12·84	SPADE TONGUE TERMINAL AVIKRIMP 800-SERIES	ETC molex INCORPORATED
±	±	±		CHKD. BY: GZ	11·26·84		DWG. NO. A CUSTOMER DWG
				APPRD. BY:			

Downloaded from Elcodis.com electronic components distributor