DRAWING MADE IN THIRD ANGLE PROJECTION

THIS DRAWING IS UNPUBLISHED. | RELEASED FOR PUBLICATION ,19 .

© COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	P	F
G	14		

REVISIONS

ZONE	LTR	DESCRIPTION	DATE	APPD
	F	REVISED & REDRAWN PER 0720-0303-93	8-30-93	BB

AMP WIRE RANGE

8 AWG STRANDED

METRIC

DIMENSIONS LISTED IN mm [INCHES]

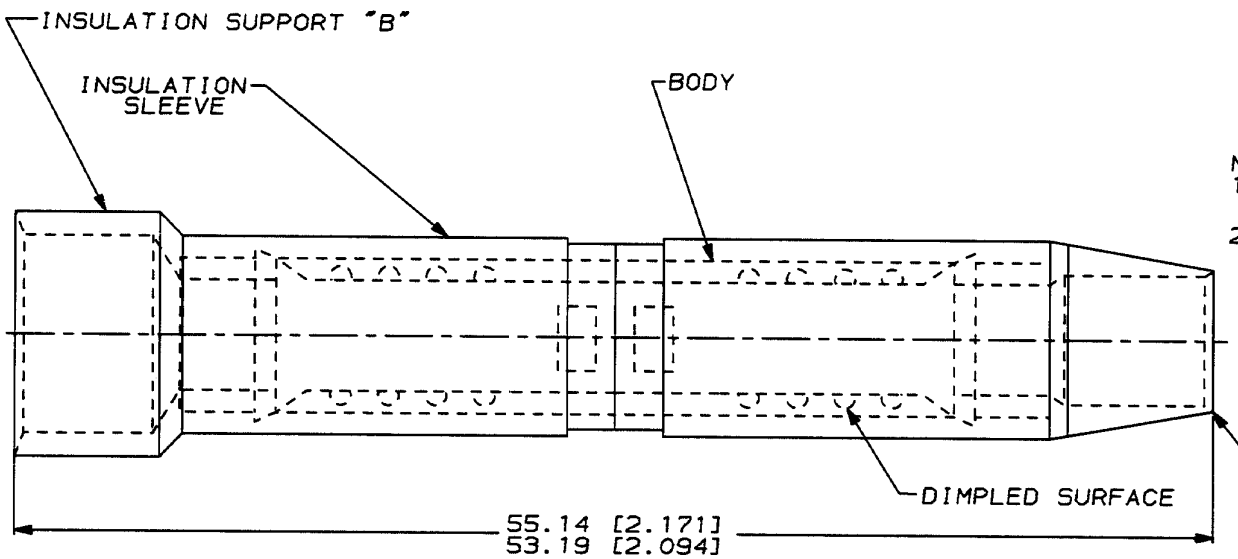

NOTE:
1. WIRE INSULATION DIA INSULATION SUPPORT "A" 6.48[.255] MAX
2. WIRE INSULATION DIA INSULATION SUPPORT "B" 8.51[.335] MAX

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111
FOR ORDER ENTRY	1-800-526-5142

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTRACTING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

MAX RECOMMENDED OPERATING TEMPERATURE: 105°C

VOLTAGE RATING: 600 V MAX

CIRCULAR MIL AREA: 6.64-10.54mm² [13,100-20,800] STRANDED

DO NOT SCALE PRINT. UNLESS SPECIFIED
TOLERANCES ON: 2 PLC DEC ± 0.20[.008] 3 PLC DEC ± - ANGLES ± -

MATERIAL: COPPER PER ASTM B-152 NYLON, COLOR: RED

FINISH: TIN PLATE PER MIL-T-10727

DR	8-30-93	S.S. GOULDEN
CHK	8-30-93	R. MERSEY
APPD	8-30-93	B. BARE
APPD	8-30-93	N. ELLIS
PRODUCT SPEC	-	
APPLICATION SPEC	-	
WEIGHT	-	

QTY	PACKAGE TYPE	PART NO
100	LOOSE PC	324658

AMP Incorporated
Harrisburg, PA 17105-3608

NAME: SPLICE, BUTT, SINGLE TO MULTIPLE, TERMINYL, WIRE SIZE: 8 AWG

SIZE	CAGE CODE	DRAWING NO
B	00779	C-324658

SCALE NTS SHEET 1 OF 1

AMP 1470-15 REV 3-92

10 JAN 1994 15:04:32 AMPT0744 <UU128A>DEPT1132>AMPT0744>U.TERMINYL-SPLICE-CUST

CUSTOMER DRAWING

Downloaded from Elcodis.com electronic components distributor