


## Automotive Grade, Sulfur Resistant Lead (Pb)-Free Thick Film, Rectangular Chip Resistors


**FEATURES**

- Superior resistance against H<sub>2</sub>S-atmosphere
- Stability  $\Delta R/R = 1\%$  for 1000 h at 70 °C
- Metal glaze on high quality ceramic
- Pure tin solder contacts on Ni barrier layer, provides compatibility with lead (Pb)-free and lead containing soldering processes
- Compliant to RoHS directive 2002/95/EC
- Halogen-free according to IEC 61249-2-21 definition
- AEC-Q200 qualified, rev. C compliant

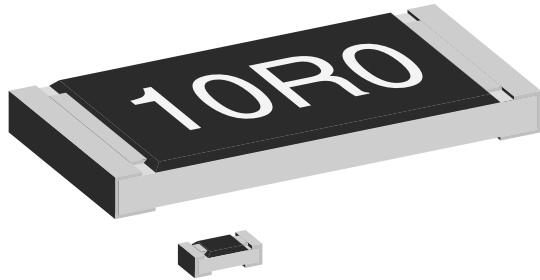

**RoHS**  
COMPLIANT  
HALOGEN  
**FREE**

| STANDARD ELECTRICAL SPECIFICATIONS |      |        |   |  |  |  |  |   |
|------------------------------------|------|--------|---|--|--|--|--|---|
| MODEL                              | SIZE |        | POWER RATING<br>$P_{70^\circ\text{C}}$<br>W | LIMITING ELEMENT<br>VOLTAGE<br>MAX.<br>V | TEMPERATURE<br>COEFFICIENT<br>ppm/K                          | TOLERANCE<br>%   | RESISTANCE<br>RANGE<br>$\Omega$                                      | E-SERIES  |
|                                    | INCH | METRIC |   |  |  |  |  |   |
| RCA0402                            | 0402 | RR1005 | 0.063                                       | 50                                       | $\pm 50$<br>$\pm 100$<br>$\pm 100$<br>$\pm 200$<br>$\pm 200$ | $\pm 0.5, \pm 1$<br>$\pm 0.5$<br>$\pm 1$<br>$\pm 1$<br>$\pm 5$ | 100R to 1M0<br>10R to 1M0<br>10R to 10M<br>1R0 to 9R76<br>1R0 to 10M | E24 + E96<br>E24 + E96<br>E24 + E96<br>E24 + E96<br>E24 |
|                                    |      |        |   |  |  |  |  |   |
| RCA0603                            | 0603 | RR1608 | 0.10  | 75                                       | $\pm 50$<br>$\pm 100$<br>$\pm 100$<br>$\pm 200$              | $\pm 0.5, \pm 1$<br>$\pm 0.5$<br>$\pm 1$<br>$\pm 5$            | 100R to 10M<br>10R to 10M<br>1R0 to 10M<br>1R0 to 10M                | E24 + E96<br>E24 + E96<br>E24 + E96<br>E24              |
|                                    |      |        |   |  |  |  |  |   |
| RCA0805                            | 0805 | RR2012 | 0.125                                       | 150                                      | $\pm 50$<br>$\pm 100$<br>$\pm 100$<br>$\pm 200$              | $\pm 0.5, \pm 1$<br>$\pm 0.5$<br>$\pm 1$<br>$\pm 5$            | 100R to 10M<br>10R to 10M<br>1R0 to 10M<br>1R0 to 10M                | E24 + E96<br>E24 + E96<br>E24 + E96<br>E24              |
|                                    |      |        |   |  |  |  |  |   |
| RCA1206                            | 1206 | RR3216 | 0.25  | 200                                      | $\pm 50$<br>$\pm 100$<br>$\pm 100$<br>$\pm 200$              | $\pm 0.5, \pm 1$<br>$\pm 0.5$<br>$\pm 1$<br>$\pm 5$            | 100R to 1M0<br>10R to 10M<br>1R0 to 10M<br>1R0 to 10M                | E24 + E96<br>E24 + E96<br>E24 + E96<br>E24              |
|                                    |      |        |   |  |  |  |  |   |
| RCA1210                            | 1210 | RR3225 | 0.5   | 200                                      | $\pm 50$<br>$\pm 100$<br>$\pm 100$<br>$\pm 200$              | $\pm 0.5, \pm 1$<br>$\pm 0.5$<br>$\pm 1$<br>$\pm 5$            | 100R to 1M0<br>10R to 1M0<br>1R0 to 10M<br>1R0 to 10M                | E24 + E96<br>E24 + E96<br>E24 + E96<br>E24              |
|                                    |      |        |   |  |  |  |  |   |
| RCA1218                            | 1218 | RR3246 | 1.0   | 200                                      | $\pm 50$<br>$\pm 100$<br>$\pm 100$<br>$\pm 200$              | $\pm 0.5, \pm 1$<br>$\pm 0.5$<br>$\pm 1$<br>$\pm 5$            | 100R to 2M2<br>100R to 2M2<br>1R0 to 2M2<br>1R0 to 2M2               | E24 + E96<br>E24 + E96<br>E24 + E96<br>E24              |
|                                    |      |        |   |  |  |  |  |   |
| RCA2010                            | 2010 | RR5025 | 0.75  | 400                                      | $\pm 50$<br>$\pm 100$<br>$\pm 100$<br>$\pm 200$              | $\pm 0.5, \pm 1$<br>$\pm 0.5$<br>$\pm 1$<br>$\pm 5$            | 100R to 10M<br>10R to 10M<br>1R0 to 10M<br>1R0 to 10M                | E24 + E96<br>E24 + E96<br>E24 + E96<br>E24              |
|                                    |      |        |   |  |  |  |  |   |
| RCA2512                            | 2512 | RR6332 | 1.0   | 500                                      | $\pm 50$<br>$\pm 100$<br>$\pm 100$<br>$\pm 200$              | $\pm 0.5, \pm 1$<br>$\pm 0.5$<br>$\pm 1$<br>$\pm 5$            | 100R to 10M<br>10R to 10M<br>1R0 to 10M<br>1R0 to 10M                | E24 + E96<br>E24 + E96<br>E24 + E96<br>E24              |
|                                    |      |        |   |  |  |  |  |   |

**Notes**

- These resistors do not feature a limited lifetime when operated within the permissible limits. However, resistance value drift increasing over operating time may result in exceeding a limit acceptable to the specific application, thereby establishing a functional time.
- Marking: See document "Surface Mount Resistor Marking" (document number 20020).
- Power rating depends on the max. temperature at the solder point, the component placement density and the substrate material.

| TECHNICAL SPECIFICATIONS                   |                    |                        |         |         |         |         |         |         |         |
|--|--------------------|------------------------|---------|---------|---------|---------|---------|---------|---------|
| PARAMETER                                  | UNIT               | RCA0402                | RCA0603 | RCA0805 | RCA1206 | RCA1210 | RCA1218 | RCA2010 | RCA2512 |
| Rated dissipation $P_{70}$ <sup>(1)</sup>  | W                  | 0.063                  | 0.10    | 0.125   | 0.25    | 0.5     | 1.0     | 0.75    | 1.0     |
| Limiting element voltage $U_{max}$ . AC/DC | V                  | 50                     | 75      | 150     | 200     | 200     | 200     | 400     | 500     |
| Insulation voltage $U_{ins.}$ (1 min)      | V                  | > 75                   | > 100   | > 200   | > 300   | > 300   | > 300   | > 300   | > 300   |
| Insulation resistance                      | $\Omega$           | > $10^9$               |         |         |         |         |         |         |         |
| Category temperature range                 | $^{\circ}\text{C}$ | - 55 to + 155          |         |         |         |         |         |         |         |
| Failure rate                               | $\text{h}^{-1}$    | < $0.1 \times 10^{-9}$ |         |         |         |         |         |         |         |
| Mass                                       | mg                 | 0.65                   | 2       | 5.5     | 10      | 16      | 29.5    | 25.5    | 40.5    |

### Note

<sup>(1)</sup> The power dissipation on the resistor generates a temperature rise against the local ambient, depending on the heat flow support of the printed-circuit board (thermal resistance). The rated dissipation applies only if the permitted film temperature of 155 °C is not exceeded.



| PART NUMBER AND PRODUCT DESCRIPTION  |   |   |  |   |                                  |   |   |   |   |   |   |   |   |   |  |  |
|--|---|---|--|---|----------------------------------|---|---|---|---|---|---|---|---|---|--|--|
| Part Number: RCA080510K0FKEA <sup>(2)</sup>  |   |   |  |   |                                  |   |   |   |   |   |   |   |   |   |  |  |
| R  | C   | A   | 0  | 8   | 0                                | 5 | 1 | 0 | K | 0 | F | K | E | A |  |  |
| MODEL  | VALUE   | TOLERANCE   | TCR  | PACKAGING <sup>(3)</sup>                            | SPECIAL                          |   |   |   |   |   |   |   |   |   |  |  |
| RCA0402<br>RCA0603<br>RCA0805<br>RCA1206<br>RCA1210<br>RCA1218<br>RCA2010<br>RCA2512 | R = Decimal<br>K = Thousand<br>M = Million<br>0000 = 0 $\Omega$ Jumper        | D = $\pm 0.5\%$<br>F = $\pm 1\%$<br>J = $\pm 5\%$<br>Z = Jumper | H = $\pm 50$ ppm/K<br>K = $\pm 100$ ppm/K<br>N = $\pm 200$ ppm/K<br>S = Jumper | EA<br>EB<br>EC<br>ED<br>EE<br>EF<br>EG<br>EH<br>EK  | Up to 2 digits                   |   |   |   |   |   |   |   |   |   |  |  |
| Product Description: RCA0805 10K 1% 100 ET1 e3                                       |   |   |  |   |                                  |   |   |   |   |   |   |   |   |   |  |  |
| RCA0805  | 10K   | 1%  | 100  | ET1   | e3                               |   |   |   |   |   |   |   |   |   |  |  |
| MODEL  | RESISTANCE VALUE  | TOLERANCE   | TCR  | PACKAGING <sup>(3)</sup>                            | LEAD (Pb)-FREE                   |   |   |   |   |   |   |   |   |   |  |  |
| RCA0402<br>RCA0603<br>RCA0805<br>RCA1206<br>RCA1210<br>RCA1218<br>RCA2010<br>RCA2512 | 10R = 10 $\Omega$<br>10K = 10 k $\Omega$<br>1M = 1 M $\Omega$<br>0R0 = Jumper | $\pm 0.5\%$<br>$\pm 1\%$<br>$\pm 5\%$                           | $\pm 50$ ppm/K<br>$\pm 100$ ppm/K<br>$\pm 200$ ppm/K                           | ET1, ET5<br>ET6, ET7<br>EF4, E02<br>E67, E82<br>ET9 | e3 = Pure tin termination finish |   |   |   |   |   |   |   |   |   |  |  |

### Notes

<sup>(2)</sup> Preferred way for ordering products is by use of the PART NUMBER.

<sup>(3)</sup> Please refer to table PACKAGING, see next page.

| PACKAGING |            |               |       |              |                |         |               |         |
|-----------|------------|---------------|-------|--------------|----------------|---------|---------------|---------|
| MODEL     | REEL       |               |       |              |                |         |               |         |
|           | TAPE WIDTH | DIAMETER      | PITCH | PIECES/ REEL | PACKAGING CODE |         |               |         |
|           |            |               |       |              | PART NUMBER    |         | PRODUCT DESC. |         |
|           |            |               |       |              | PAPER          | BLISTER | PAPER         | BLISTER |
| RCA0402   | 8 mm       | 180 mm/7"     | 2 mm  | 10 000       | ED             |         | ET7           |         |
|           |            | 285 mm/11.25" | 2 mm  | 20 000       | EC             |         | ET6           |         |
|           |            | 330 mm/13"    | 2 mm  | 50 000       | EE             |         | EF4           |         |
| RCA0603   | 8 mm       | 180 mm/7"     | 4 mm  | 5000         | EA             |         | ET1           |         |
|           |            | 285 mm/11.25" | 4 mm  | 10 000       | EB             |         | ET5           |         |
|           |            | 330 mm/13"    | 4 mm  | 20 000       | EC             |         | ET6           |         |
| RCA0805   | 8 mm       | 180 mm/7"     | 4 mm  | 5000         | EA             |         | ET1           |         |
|           |            | 285 mm/11.25" | 4 mm  | 10 000       | EB             |         | ET5           |         |
|           |            | 330 mm/13"    | 4 mm  | 20 000       | EC             |         | ET6           |         |
| RCA1206   | 8 mm       | 180 mm/7"     | 4 mm  | 5000         | EA             |         | ET1           |         |
|           |            | 285 mm/11.25" | 4 mm  | 10 000       | EB             |         | ET5           |         |
|           |            | 330 mm/13"    | 4 mm  | 20 000       | EC             |         | ET6           |         |
| RCA1210   | 8 mm       | 180 mm/7"     | 4 mm  | 5000         | EA             |         | ET1           |         |
|           |            | 285 mm/11.25" | 4 mm  | 10 000       | EB             |         | ET5           |         |
|           |            | 330 mm/13"    | 4 mm  | 20 000       | EC             |         | ET6           |         |
| RCA1218   | 12 mm      | 180 mm/7"     | 4 mm  | 4000         |                | EK      |               | ET9     |
| RCA2010   | 12 mm      | 180 mm/7"     | 4 mm  | 4000         |                | EF      |               | E02     |
| RCA2512   | 12 mm      | 180 mm/7"     | 8 mm  | 2000         |                | EG      |               | E67     |
|           |            |               | 4 mm  | 4000         |                | EH      |               | E82     |

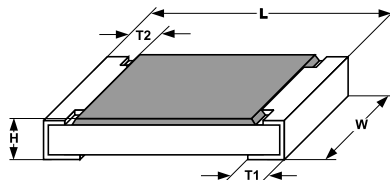
**DIMENSIONS**


| SIZE |        | DIMENSIONS in millimeters |             |             |             |           |
|------|--------|---------------------------|-------------|-------------|-------------|-----------|
| INCH | METRIC | L                         | W           | H           | T1          | T2        |
| 0402 | 1005   | 1.0 ± 0.05                | 0.5 ± 0.05  | 0.35 ± 0.05 | 0.25 ± 0.05 | 0.2 ± 0.1 |
| 0603 | 1608   | 1.55 ± 0.10               | 0.85 ± 0.1  | 0.45 ± 0.05 | 0.3 ± 0.2   | 0.3 ± 0.2 |
| 0805 | 2012   | 2.0 ± 0.20                | 1.25 ± 0.15 | 0.45 ± 0.05 | 0.3 ± 0.20  | 0.3 ± 0.2 |
| 1206 | 3216   | 3.2 ± 0.10                | 1.6 ± 0.15  | 0.55 ± 0.05 | 0.45 ± 0.2  | 0.4 ± 0.2 |
| 1210 | 3225   | 3.2 ± 0.2                 | 2.5 ± 0.2   | 0.55 ± 0.05 | 0.45 ± 0.2  | 0.4 ± 0.2 |
| 1218 | 3246   | 3.2 ± 0.10                | 4.6 ± 0.15  | 0.55 ± 0.05 | 0.45 ± 0.2  | 0.4 ± 0.2 |
| 2010 | 5025   | 5.0 ± 0.15                | 2.5 ± 0.15  | 0.6 ± 0.1   | 0.6 ± 0.2   | 0.6 ± 0.2 |
| 2512 | 6332   | 6.3 ± 0.2                 | 3.15 ± 0.15 | 0.6 ± 0.1   | 0.6 ± 0.2   | 0.6 ± 0.2 |

| SIZE |        | SOLDER PAD DIMENSIONS in millimeters |     |     |                |     |     |
|------|--------|--------------------------------------|-----|-----|----------------|-----|-----|
|      |        | REFLOW SOLDERING                     |     |     | WAVE SOLDERING |     |     |
| INCH | METRIC | a                                    | b   | l   | a              | b   | l   |
| 0402 | 1005   | 0.4                                  | 0.6 | 0.5 |                |     |     |
| 0603 | 1608   | 0.5                                  | 0.9 | 1.0 | 0.9            | 0.9 | 1.0 |
| 0805 | 2012   | 0.7                                  | 1.3 | 1.2 | 0.9            | 1.3 | 1.3 |
| 1206 | 3216   | 0.9                                  | 1.7 | 2.0 | 1.1            | 1.7 | 2.3 |
| 1210 | 3225   | 0.9                                  | 2.5 | 2.0 | 1.1            | 2.5 | 2.2 |
| 1218 | 3246   | 1.05                                 | 4.9 | 1.9 | 1.25           | 4.8 | 1.9 |
| 2010 | 5025   | 1.0                                  | 2.5 | 3.9 | 1.2            | 2.5 | 3.9 |
| 2512 | 6332   | 1.0                                  | 3.2 | 5.2 | 1.2            | 3.2 | 5.2 |

**FUNCTIONAL PERFORMANCE**

| PERFORMANCE IN SULFUR-CONTAINING AMBIANCE  |  |  |
|--|--|--|
| TEST NAME                                  | HUMID SULFUR VAPOR TEST  | HUMID SULFUR VAPOR TEST (Accelerated)  |
| Reference specification                    | ASTM B809-95   | ASTM B809-95 accelerated conditions  |
| Test conditions (temperature, humidity)    | 60 °C ± 2 °C<br>85 % ± 4 % RH  | 90 °C ± 2 °C<br>74 % ± 7 % RH  |
| Aggressive agent                           | Sulfur (saturated vapor)   | Sulfur (saturated vapor)   |
| Failure criteria in VI under magnification | No silver sulfide growth at the interface between termination and protective overcoat.<br>No signs of mechanical damage. | No silver sulfide growth at the interface between termination and protective overcoat.<br>No signs of mechanical damage. |
| Failure criteria in electrical test        | ≤ (± 1 % R + 0.05 Ω)   | ≤ (± 1 % R + 0.05 Ω)   |
| Time before failure                        | 8000 h   | 1000 h   |

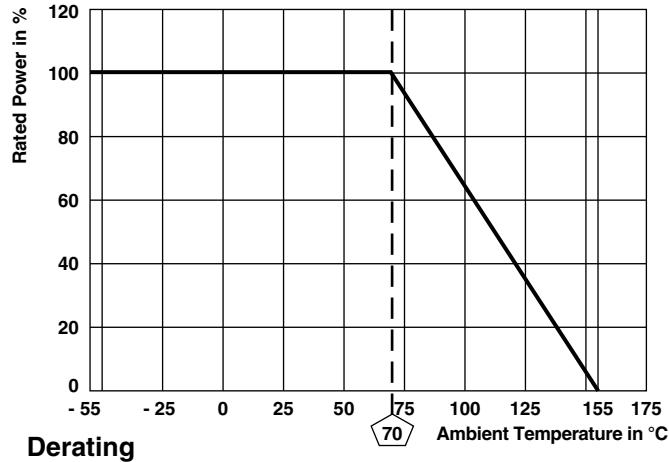

| TEST PROCEDURES AND REQUIREMENTS |                               |   |  |   |                                |
|----------------------------------|-------------------------------|---|--|---|--------------------------------|
| EN 60115-1<br>CLAUSE             | IEC 60068-2<br>TEST<br>METHOD | TEST                                    | PROCEDURE  | REQUIREMENTS<br>PERMISSIBLE CHANGE ( $\Delta R$ )               |                                |
|                                  |                               |   |  | SIZE 0402   | SIZE 0603 TO 2512              |
|                                  |                               |   |  | STABILITY CLASS 2 OR BETTER                                     |                                |
|                                  |                               |   |  | 1 $\Omega$ to 10 M $\Omega$                                     |                                |
| 4.5                              | -                             | Resistance                              | -  | 0.5 %, $\pm 1$ %, $\pm 5$ %                                     |                                |
| 4.8.4.2                          | -                             | Temperature coefficient                 | (20/- 55/20) °C and<br>(20/125/20) °C  | $\pm 50$ ppm/K, $\pm 100$ ppm/K, $\pm 200$ ppm/K                |                                |
| 4.13                             | -                             | Short time overload                     | $U = 2.5 \times \sqrt{P_{70} \times R}$<br>$\leq 2 \times U_{max.}$ ;<br>duration: Acc. to style | $\pm (0.25 \% R + 0.05 \Omega)$                                 |                                |
| 4.19                             | 14 (Na)                       | Rapid change of temperature             | 30 min. at - 55 °C;<br>30 min. at 125 °C<br>5 cycles<br>1000 cycles                              | $\pm (0.25 \% R + 0.05 \Omega)$<br>$\pm (1 \% R + 0.05 \Omega)$ |                                |
| 4.25.1                           | -                             | Endurance at 70 °C                      | $U = \sqrt{P_{70} \times R} \leq U_{max.}$ ;<br>1.5 h on; 0.5 h off;<br>70 °C, 1000 h            | $\pm (1 \% R + 0.05 \Omega)$                                    | $\pm (0.5 \% R + 0.05 \Omega)$ |
| 4.18.2                           | 58 (Td)                       | Resistance to soldering heat            | Solder bath method<br>(260 $\pm$ 5) °C<br>(10 $\pm$ 1) s   | $\pm (0.25 \% R + 0.05 \Omega)$                                 |                                |
| 4.24                             | 78 (Cab)                      | Damp heat, steady state                 | (40 $\pm$ 2) °C;<br>(93 $\pm$ 3) % RH;<br>56 days  | $\pm (1 \% R + 0.05 \Omega)$                                    | $\pm (0.5 \% R + 0.05 \Omega)$ |
| 4.25.3                           | -                             | Endurance at upper category temperature | 155 °C, 1000 h   | $\pm (0.5 \% R + 0.05 \Omega)$                                  |                                |

All tests are carried out in accordance with the following specifications:

- EN 60115-1, generic specification
- EN 140400, sectional specification
- EN 140401-802, detail specification
- AEC-Q 200, automotive specification
- IEC 60068-2, environmental test procedures
- ASTM B 809-95, standard test method for porosity in metallic coatings by humid sulfur.

Packaging of components is done in paper or blister tapes according to IEC 60286-3.



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.