


## Wirewound Resistors, Military/Established Reliability MIL-PRF-39009 Qualified, Type RER, R Level



**FEATURES**

- Aluminum heat sink housing
- Molded construction for total environmental protection
- Qualified to MIL-PRF-39009
- Complete welded construction
- Non-inductive styles manufactured with Aryton-Perry winding for lowest reactive components
- Mounts on chassis to utilize heat-sink effect

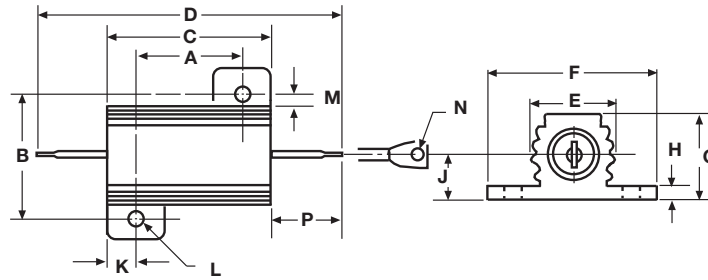
| STANDARD ELECTRICAL SPECIFICATIONS |                        |   |                              |                       |                       |
|------------------------------------|------------------------|---|------------------------------|-----------------------|-----------------------|
| MILITARY MODEL                     | VISHAY REFERENCE MODEL | POWER RATING<br>$P_{25^{\circ}\text{C}}$<br>W | RESISTANCE RANGE<br>$\Omega$ | TOLERANCE<br>$\pm \%$ | WEIGHT (typical)<br>g |
| RER40                              | ENH05                  | 5   | 1 to 1.65K                   | 1                     | 3.3                   |
| RER45                              | ENH10                  | 10  | 1 to 2.8K                    | 1                     | 8.8                   |
| RER50                              | ENH25                  | 20  | 1 to 6.04K                   | 1                     | 16.5                  |
| RER55                              | ENH50                  | 30  | 1 to 4.99K                   | 1                     | 35                    |
| RER60                              | ERH05                  | 5   | 0.10 to 3.32K                | 1                     | 3                     |
| RER65                              | ERH10                  | 10  | 0.10 to 5.62K                | 1                     | 6                     |
| RER70                              | ERH25                  | 20  | 0.10 to 12.1K                | 1                     | 13                    |
| RER75                              | ERH50                  | 30  | 0.10 to 39.2K                | 1                     | 28                    |

| TECHNICAL SPECIFICATIONS       |          |  |             |             |             |
|--------------------------------|----------|--|-------------|-------------|-------------|
| PARAMETER                      | UNIT     | RER40/RER60  | RER45/RER65 | RER50/RER70 | RER55/RER75 |
| Free Air Power Rating at 25 °C | W        | 3  | 6           | 8           | 10          |
| Temperature Coefficient        | ppm/°C   | $\pm 20$ for 20 $\Omega$ and above; $\pm 50$ for 1 $\Omega$ to 19.9 $\Omega$ ; $\pm 100$ for 0.1 $\Omega$ to 0.99 $\Omega$ |             |             |             |
| Maximum Working Voltage        | V        | $(P \times R)^{1/2}$   |             |             |             |
| Insulation Resistance          | $\Omega$ | 10 000 M $\Omega$ minimum dry, 1000 M $\Omega$ minimum after moisture test   |             |             |             |
| Solderability                  | -        | Meets requirements of ANSI J-STD-002   |             |             |             |
| Operating Temperature Range    | °C       | - 55 to + 250  |             |             |             |

| MILITARY PART NUMBER INFORMATION                                     |                  |   |   |  |
|--|------------------|---|---|--|
| Military Part Numbering example: RER65F1001RC02                      |                  |   |   |  |
| R  | E                | R   | 6   | 5  |
| F  | 1                | 0   | 0   | 1  |
| R  | C                | 0   | 2   |  |
| MIL TYPE   | TOLERANCE CODE   | RESISTANCE VALUE  | FAILURE RATE  | PACKAGING CODE   |
| RER40<br>RER45<br>RER50<br>RER55<br>RER60<br>RER65<br>RER70<br>RER75 | F = $\pm 1.0 \%$ | 3 digit significant figure, followed by a multiplier<br><br>49R9 = 49.9 $\Omega$<br>1000 = 100 $\Omega$<br>1001 = 1000 $\Omega$ | M = 1.0 %/1000 h<br>P = 0.1 %/1000 h<br>R = 0.01 %/1000 h | C02 = Tin/lead, card pack<br>CSL = Tin/lead, card pack, single lot date code |

Wirewound Resistors, Military/Established  
Reliability MIL-PRF-39009 Qualified, Type  
RER, R Level

Vishay Dale

**DIMENSIONS**


| MILITARY MODEL               | DIMENSIONS in inches [millimeters]      |   |   |   |   |   |   |  |  |  |  |  |  |   |
|------------------------------|---|---|---|---|---|---|---|--|--|--|--|--|--|---|
|                              | A                                       | B                                       | C                                       | D                                       | E                                       | F                                       | G                                       | H                                      | J                                      | K                                      | L                                      | M                                      | N                                      | P                                       |
| <b>RER40</b><br><b>RER60</b> | 0.444<br>± 0.005<br>[11.280<br>± 0.127] | 0.490<br>± 0.005<br>[12.450<br>± 0.127] | 0.600<br>± 0.031<br>[15.240<br>± 0.787] | 1.125<br>± 0.062<br>[28.580<br>± 1.570] | 0.334<br>± 0.015<br>[8.480<br>± 0.381]  | 0.646<br>± 0.015<br>[16.410<br>± 0.381] | 0.320<br>± 0.015<br>[8.130<br>± 0.381]  | 0.065<br>± 0.010<br>[1.650<br>± 0.254] | 0.133<br>± 0.010<br>[3.380<br>± 0.254] | 0.078<br>± 0.010<br>[1.980<br>± 0.254] | 0.093<br>± 0.005<br>[2.360<br>± 0.127] | 0.078<br>± 0.015<br>[1.980<br>± 0.381] | 0.050<br>± 0.005<br>[1.270<br>± 0.127] | 0.266<br>± 0.062<br>[6.760<br>± 1.570]  |
| <b>RER45</b><br><b>RER65</b> | 0.562<br>± 0.005<br>[14.270<br>± 0.127] | 0.625<br>± 0.005<br>[15.880<br>± 0.127] | 0.750<br>± 0.031<br>[19.050<br>± 0.787] | 1.375<br>± 0.062<br>[34.930<br>± 1.570] | 0.420<br>± 0.015<br>[10.670<br>± 0.381] | 0.800<br>± 0.015<br>[20.320<br>± 0.381] | 0.390<br>± 0.015<br>[9.910<br>± 0.381]  | 0.075<br>± 0.010<br>[1.900<br>± 0.254] | 0.165<br>± 0.010<br>[4.190<br>± 0.254] | 0.093<br>± 0.010<br>[2.360<br>± 0.254] | 0.094<br>± 0.005<br>[2.390<br>± 0.127] | 0.102<br>± 0.015<br>[2.590<br>± 0.381] | 0.085<br>± 0.005<br>[2.160<br>± 0.127] | 0.312<br>± 0.062<br>[7.920<br>± 1.570]  |
| <b>RER50</b><br><b>RER70</b> | 0.719<br>± 0.005<br>[18.260<br>± 0.127] | 0.781<br>± 0.005<br>[19.840<br>± 0.127] | 1.062<br>± 0.031<br>[26.970<br>± 0.787] | 1.938<br>± 0.062<br>[49.230<br>± 1.570] | 0.550<br>± 0.015<br>[13.970<br>± 0.381] | 1.080<br>± 0.015<br>[27.430<br>± 0.381] | 0.546<br>± 0.015<br>[13.870<br>± 0.381] | 0.075<br>± 0.010<br>[1.900<br>± 0.254] | 0.231<br>± 0.010<br>[5.870<br>± 0.254] | 0.172<br>± 0.010<br>[4.370<br>± 0.254] | 0.125<br>± 0.005<br>[3.180<br>± 0.127] | 0.115<br>± 0.015<br>[2.920<br>± 0.381] | 0.085<br>± 0.005<br>[2.160<br>± 0.127] | 0.438<br>± 0.062<br>[11.130<br>± 1.570] |
| <b>RER55</b><br><b>RER75</b> | 1.562<br>± 0.005<br>[39.670<br>± 0.127] | 0.844<br>± 0.005<br>[21.440<br>± 0.127] | 1.968<br>± 0.031<br>[49.990<br>± 0.787] | 2.781<br>± 0.062<br>[70.640<br>± 1.570] | 0.630<br>± 0.015<br>[16.000<br>± 0.381] | 1.140<br>± 0.015<br>[28.960<br>± 0.381] | 0.610<br>± 0.015<br>[15.490<br>± 0.381] | 0.088<br>± 0.010<br>[2.240<br>± 0.254] | 0.260<br>± 0.010<br>[6.600<br>± 0.254] | 0.196<br>± 0.010<br>[4.980<br>± 0.254] | 0.125<br>± 0.005<br>[3.180<br>± 0.127] | 0.107<br>± 0.015<br>[2.720<br>± 0.381] | 0.085<br>± 0.005<br>[2.160<br>± 0.127] | 0.438<br>± 0.062<br>[11.130<br>± 1.570] |

**MATERIAL SPECIFICATIONS**

**Element:** Copper-nickel alloy or nickel-chrome alloy, depending on resistance value

**Core:** Ceramic, steatite or alumina, depending on physical size

**Encapsulant:** Silicone molded construction

**Housing:** Aluminum with hard anodic coating

**End Caps:** Stainless steel

**Standard Terminals:** Tinned Copperweld®

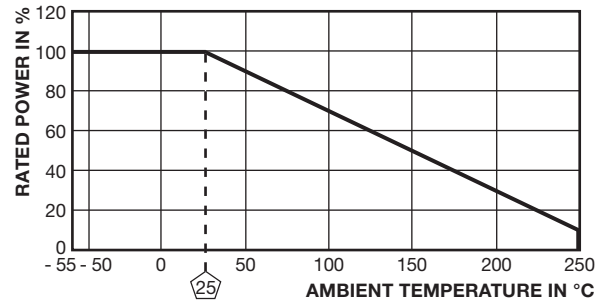
**Part Marking:** Source code, JAN, military PIN, date/lot code

**POWER RATING**

Vishay RER resistor wattage ratings are based on mounting to the proper heat sink.

RER40, RER45, RER60, RER65: 4" x 6" x 2" x 0.040" thick aluminum chassis

RER50, RER55, RER70, RER75: 5" x 7" x 2" x 0.040" thick aluminum chassis

**DERATING**


| PERFORMANCE                     |  |                       |
|---------------------------------|--|-----------------------|
| TEST                            | CONDITIONS OF TEST   | TEST LIMITS           |
| Low Temperature Operation       | Apply rated power until thermal stability, remove power subject to air temperature of - 55 °C for 15 min to 30 min           | ± (0.5 % + 0.01 Ω) ΔR |
| Short Time Overload             | 5 x rated power for 5 s  | ± (0.3 % + 0.01 Ω) ΔR |
| Dielectric Withstanding Voltage | 1000 V <sub>rms</sub> (RER40, RER45, RER50, RER60, RER65, RER70),<br>2000 V <sub>rms</sub> (RER55 and RER75), 1 min duration | ± (0.2 % + 0.01 Ω) ΔR |
| Low Temperature Storage         | - 55 °C for 24 h   | ± (0.3 % + 0.01 Ω) ΔR |
| High Temperature Exposure       | 250 °C for 2000 h  | ± (1.0 % + 0.01 Ω) ΔR |
| Moisture Resistance             | MIL-STD-202, method 106  | ± (0.5 % + 0.01 Ω) ΔR |
| Shock, Specified Pulse          | MIL-STD-202, method 213, condition 1   | ± (0.2 % + 0.01 Ω) ΔR |
| Vibration, High Frequency       | MIL-STD-202, method 204, condition D   | ± (0.2 % + 0.01 Ω) ΔR |
| Load Life                       | 2000 h at rated power, + 25 °C, 1.5 h "ON", 0.5 h "OFF"  | ± (1.0 % + 0.01 Ω) ΔR |
| Extended Life                   | 10 000 h at rated power, + 25 °C, 1.5 h "ON", 0.5 h "OFF"  | ± (0.2 % + 0.01 Ω) ΔR |
| Terminal Strength               | MIL-STD-202, method 211, condition A<br>5 pound (RER40, RER45, RER60, RER65),<br>10 pound (RER50, RER55, RER70, RER75)       | ± (0.2 % + 0.01 Ω) ΔR |



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.